


LED emergency driver YH29F,YH29FA

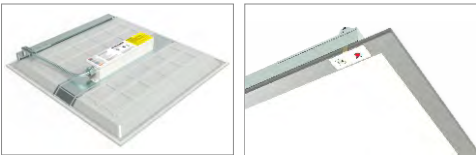


Product description

- Suit for 10W to 300W lamp with internal or external led driver, 10W-300W lamp must be with 0-10V dimmer function.
- Used with LiFePO₄ and Ni-Cd battery.
- DC150-200V output.
- LED emergency converter that can transfer standard LED fitting into emergency LED fitting.
- Accessory test switch and charge indicator.


Applications

- UL Listed for dry/damp locations.
- For use on a wide range of LED fittings to convert them from standard to emergency fitting.
- Output DC150-200V.
- Additional Relay that can control standard LED driver.
- Deep discharge protection.
- Ambient range ta 0....50°C.
- IP20 protection.
- Not intended for use in luminaries for high-risk task area lighting.

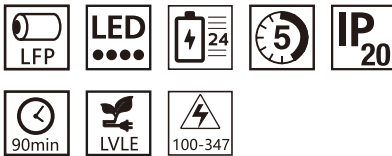

Dimensions

L330×W67×H55 mm
L 12.9'× W 2.6'× H 2.2'

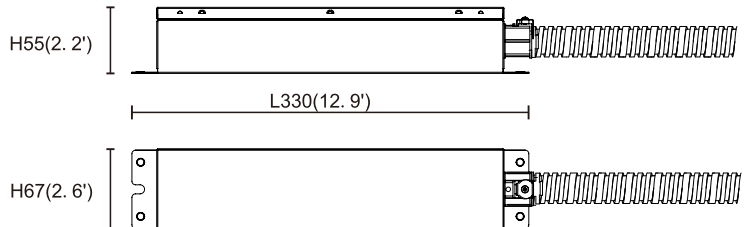

Ordering data

Model No.:	Input voltage	Output voltage/power (Emergency mode)	Battery pack	Duration (E.M mode)
YH29F-16VN	100-347Vac 50-60Hz	150-200V 16W	Ni-Cd 12V 2.8Ah	90minutes
YH29F-25VL	100-347Vac 50-60Hz	150-200V 25W	LiFePO ₄ 12.8V 4.5Ah	90minutes
YH29FA-16VN	100-277Vac 50-60Hz	150-200V 16W	Ni-Cd 12V 2.8Ah	90minutes
YH29FA-25VL	100-277Vac 50-60Hz	150-200V 25W	LiFePO ₄ 12.8V 4.5Ah	90minutes

YH29F series will be produced and delivered with a 300mm(11.8') metal flex pipe.
The length of the metal flex pipe could be customized with extra cost if needed.

LED emergency driver

YH29F,YH29FA

Technical data

Item	Value
Rated input voltage	100-277VAC, 100-347VAC,50/60Hz
Input current	120mAmax
Input power	BWmax
Power factor	0.6@100VAC, 0.5@347VAC
Output wire L-out N-out (LED load input)	AC6AMax
Output voltage range	DC150-200V
Max output voltage	250V
Battery pack voltage/capacity	LiFePO4 12BV 4500mAh,57.6Wh Ni-Cd 12V 2800mAh,33.6Wh
Recharge current	0-500mA
Recharge time	24hours
Discharge time	90 minutes
Max. casing temperature tc	10 °c

Protections:

- Input over current protection.
- Output over voltage protection.
- Output under current protection.
- Output short circuit protection.

Test switch

- Emergency conversion Kit will go into emergency mode if test switch is pressed when main supply is on, while it will go into charging mode if test switch is not pressed.

In emergency mode, press the test switch for 3 seconds to turn off the current emergency state.

LED indicator

- Red stable: charging mode or charging full
- Red off: main power off or discharging mode

CAUTION:

- DO NOT USE OUTDOORS.
- DO NOT MOUNT NEAR GAS OR ELECTRONIC HEATERS.
- EQUIPMENT SHOULD BE MOUNTED IN LOCATIONS AND AT HEIGHTS WHERE IT WILL NOT BE SUBJECTED TO TAMPERING BY UNAUTHORIZED PERSONNEL.
- THE USE OF ACCESSORY EQUIPMENT NOT RECOMMENDED BY THE MANUFACTURER MAY CAUSE AN UNSAFE CONDITION.
- DO NOT USE THIS EQUIPMENT FOR OTHER THAN ITS INTENDED USE.
- Use with grounded, UL Listed, damp location rated fixtures and case should be grounding.
- The equipment is intended for ordinary locations and for permanent installation into one or more Listed emergency luminaires.

LED emergency driver YH29F,YH29FA


Installation instruction:

- Please install this product properly by the licensed electrician.
- Surface mounting and suspending mounting are available.
- Please check and confirm all the data and usage surrounding before installation.
- Damp or wet location installation is OK.
- This item could be used in the sealed fixtures or installed open area of the fixtures.
- Please keep it away from the flammable materials with a place of good heat dissipation.
- Please charge the battery consistently for >24 hours for the first time usage so as to activate the whole battery cells of discharging/charging duration.

YH29F suit for below lamp.

- 10-200W lamp with internal led driver
- YH29F-16VN ,YH29FA-16VN
16W above lamp must be with 0-10V or 1-10V dimmer.
Lamp power must be $\leq 15W$ (1W extra power) when dimmer is at the lowest voltage.
- YH29F-25VL , YH29FA-25VL
25W above lamp must be with 0-10V or 1-10V dimmer.
Lamp power must be $\leq 24W$ (1W extra power) when dimmer is at the lowest voltage.

Wiring diagram

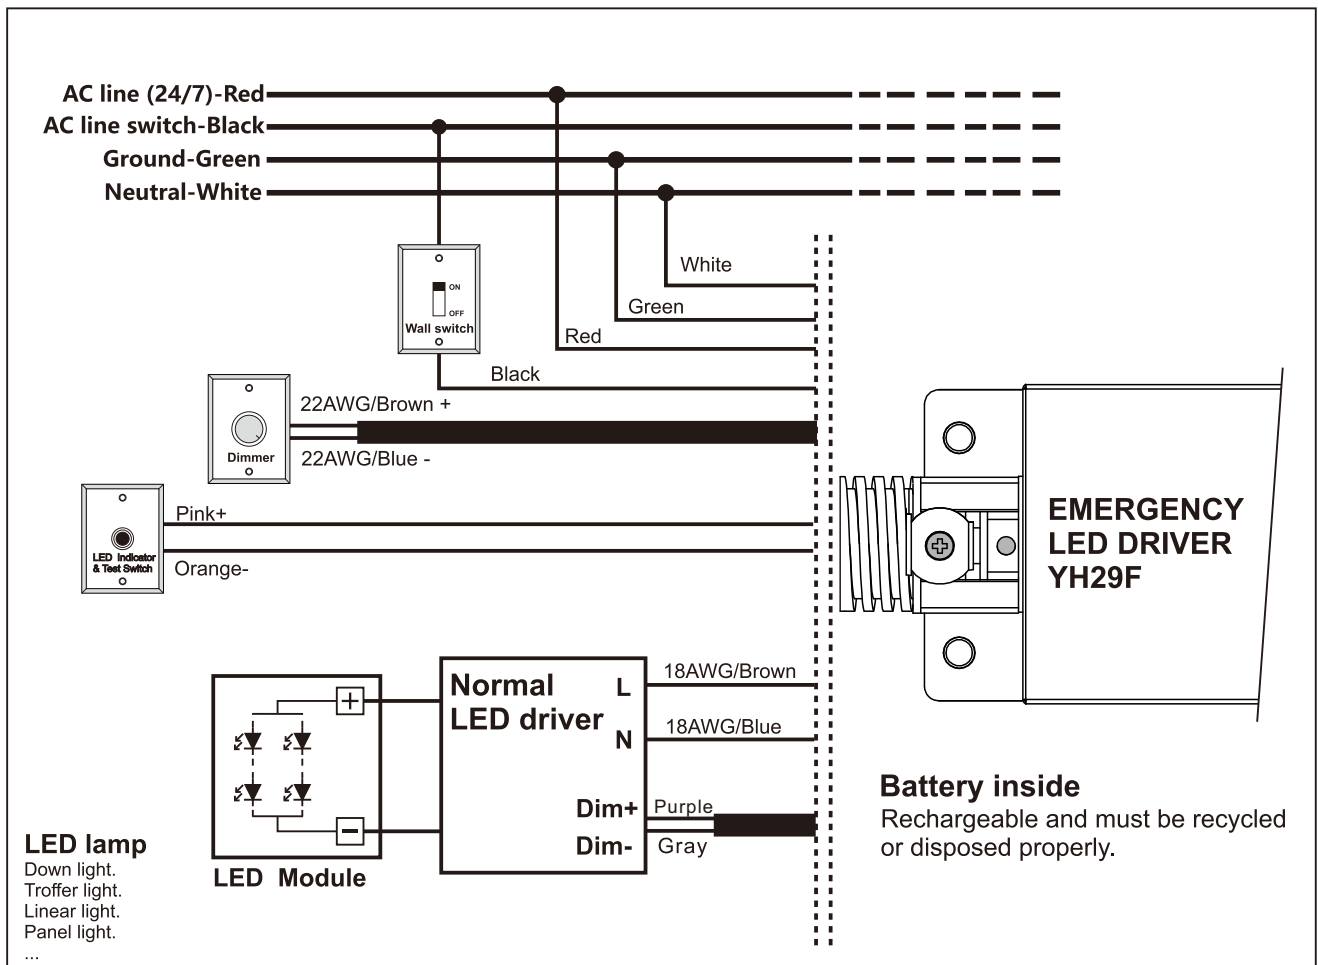

LED emergency driver

YH29F,YH29FA

Maintenance:

- Please turn off the main power every 3 months, so as to let the battery operate a charging/discharging circle. This will help make battery sustain a longer lifetime.
- Please check the emergency function with the push test button.
- Battery capacity is >60% when factory deliver goods, so it could be consistently stocked for Max 12 months.

Notes:

Users are not suggested replacing the batteries by themselves. If needed, please use the nominated batteries pack by the manufacturer and contact with us for the instructions of maintenance.

Warranty

- Warranty 5 years.
- Except for the following circumstances:
 - 1) Improper installation or operation.
 - 2) Misuse.
 - 3) Abuse.
 - 4) Unauthorized or improper repair alteration.
 - 5) Accident or negligence in use, storage, transportation.
 - 6) Any natural acts.

