


Specification:

Lamp Type	LED	
EXIT Sign Lamp Wattage	Red	120VAC, 60Hz, 0.031A, 3.2W
		277VAC, 60Hz, 0.010A, 3.6W
	Green	120VAC, 60Hz, 0.033A, 3.8W
		277VAC, 60Hz, 0.017A, 4.4W
Emergency Operation		

Lamp Type	LED: exit sign, Incandescent: emergency	
Emergency Lamps Wattage	Self Powered	120VAC, 60Hz, 0.10A, 10W
		277VAC, 60Hz, 0.05A, 10W
	Self Diagnostic	120VAC, 60Hz, 0.12A, 15W
		277VAC, 60Hz, 0.60A, 15W
Emergency Operation	90 minutes	

Mechanical Data:

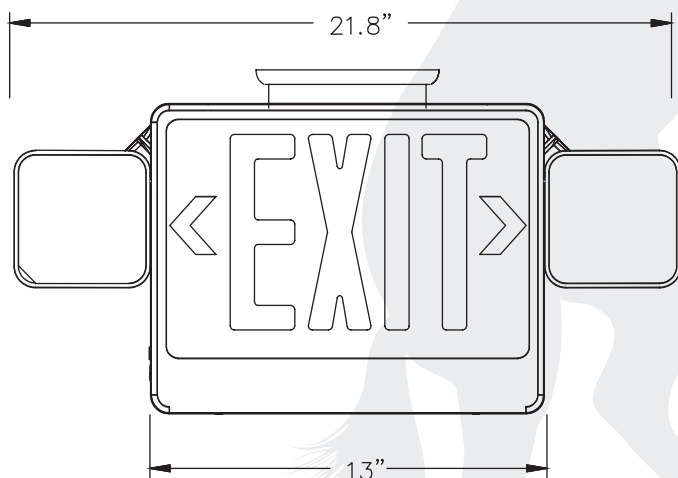

Mechanical Data:

Base Model No.	Case Color	Letter Color	Options
FHEC31	W - White	R - Red	SD - Self Diagnostic
	B - Black	G - Green	RC - Remote Capable

Build part number by adding Base Model No., one of each Case Color, and Letter Color, and desired options code. Example: FHEC31-WR-SD

Model: FHEC31



Listings & Certifications:



Standard Features:

- Push-to-test Switch
- LED Charge Indicator
- Maintenance free, 6V sealed lead-acid battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mount
- Long Life Energy Saving LED light source
- Field replaceable snap out/in chevron directional indicator.
- Snap-fit faceplate installs without use of tools
- Universal single face and double face (extra faceplate included)
- Fully adjustable glare free lighting heads
- Universal mounting pattern knockout in backplate for J-box mounting
- Two 5.4W DC 5 wedge-base lamps for emergency
- Remote Capable Option yields 12W extra capacity
- Damp Location Listed