

LED TECHNOLOGY

50,000 Hours Life, 80/60/40 Watt, 120-277VAC 50/60Hz

Applications:

Pathway, Wall, Security, Walkways, and Perimeter Lighting.

Features:

- Adjustable Wattage 80/60/40Watt
- Adjustable CCT 3000K, 4000K, and 5000K
- Photocell Included with Quick Disconnect
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Certified Outdoor Wet Location
- Replaces 275W HID Unit
- Bronze, Power Coat Finish
- Polycarbonate Lens with UV Stabilization

ADJUSTABLE WATT

80 WATTS	11,680 LUMENS
60 WATTS	9,240 LUMENS
40 WATTS	6,440 LUMENS



ADJUSTABLE LIGHT COLOR

3000K WARM WHITE
4000K COOL WHITE
5000K DAY LIGHT



Specification:

Input Line Voltage:	120-277VAC
Input Power:	80/60/40W
Input Line Frequency:	50/60Hz
Luminaire Life (Rated):	50,000hrs
Minimum Starting Temp:	-40°C/-40°F
Maximum Operating Temp:	45°C/113°F
Adjustable CCT:	3000K/4000K/5000K
CRI:	≥80
Lumens:	11680/9240/6440
CBCP:	4782

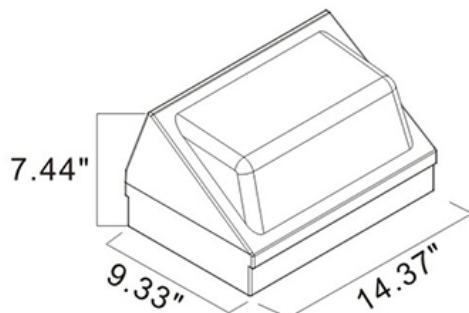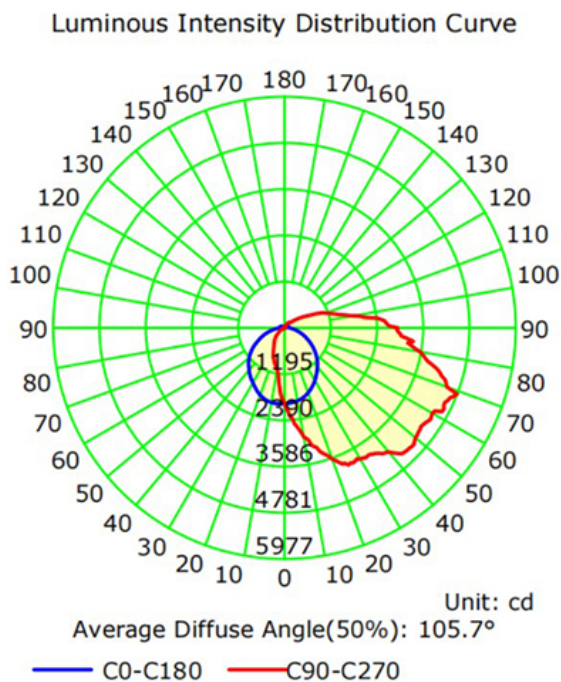

1.0m	806.85 / 1961.93lx	2.86m / 6.41sq.m
2.0m	201.71 / 490.48lx	5.71m / 25.64sq.m
3.0m	89.65 / 217.99lx	8.57m / 57.69sq.m
4.0m	50.43 / 122.62lx	11.43m / 102.56sq.m
5.0m	32.27 / 78.48lx	14.28m / 160.25sq.m
6.0m	22.41 / 54.50lx	17.14m / 230.75sq.m
7.0m	16.47 / 40.04lx	20.00m / 314.08sq.m
8.0m	12.61 / 30.66lx	22.85m / 410.23sq.m
9.0m	9.96 / 24.22lx	25.71m / 519.20sq.m
10.0m	8.07 / 19.62lx	28.57m / 640.99sq.m

Height Avg./Nadir, E Beam Angle: 110.0° Diameter / Area

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP80FHZ/CCT	80/60/40 Watt LED Wall Pack Bronze Body, Adjustable CCT	80W 60W 40W	11680 9240 6440

*5 Year Limited Warranty

UPC: 80680215548-7