



KT-LED9T8-24GC-835-X

T8 LED LAMP

DESCRIPTION

9W T8 LED | 3500K | >80 CRI | Ballast & Line Voltage Compatible













PRODUCT FEATURES

- Plug & Play Application: Compatible with Most Instant Start Electronic T8 Ballasts, Contact Keystone for Ballast Compatibility List
- Bypass Ballast Application: Runs on 120-277 Line Voltage
- Direct Replacement for the Following Fluorescent Lamps: F17T8
- UL Listed and UL Classified
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Frosted Lens Eliminates Pixelation



- Operating Temperature: -20°C/-4°F to 45°C/113°F
- 100+ Lumens per Watt (Bare Lamp Efficacy) • Suitable for Dry and Damp Locations
- Improved Lamp Durability with Shatterproof Coated Glass,
- designed to pass drop tests of 6' on hard surface
- NSF Listed: NSF/ANSI Standard 2 Food Equipment, Splash Zone (Not for Direct Food Zone without additional fixture considerations)

OPERATING SPECIFICATIONS

ELECTRICAL AND PERFORMANCE CHARACTERISTICS


CRI	Bare Lamp Wattage	Nominal Lamp Lumens	Instant Start Ballast Compatible Application							Line Voltage Application				
			Input Voltage	System Wattage*			Initial Lumens*			Input	Lamp	Initial	Max. THD	Power Factor
				0.78BF	0.88BF	1.18BF	0.78BF	0.88BF	1.18BF	Voltage	Wattage	Lumens		
>80	9W	1100	Ballast Dependent	11.2W	11.5W	12.1W	1110	1110	1110	120-277	9W	1110	20%	>0.9

^{*} Nominal values. Actual values may vary depending on electronic ballast used.

RATED LIFE

L70 (Hours) 50.000

POLAR CANDELA DISTRIBUTION



Located at Horizontal Angle = 0, Vertical Angle 0

- 1. Violet Vertical Plane through Horizontal Angles (90-270)
- 2. Green Vertical Plane through Horizontal Angles (0-180)

Beam Angle: 220°

Visible Light Area: 325°





KT-LED9T8-24GC-835-X


T8 LED LAMP


WIRING: Plug & Play

Simply replace the existing fluorescent lamp with Keystone Combo Drive LED lamp. No changes to the existing fluorescent ballast wiring needed. For ballast compability questions, please contact Keystone.


WIRING: Bypass Ballast

Typical Ballast Configurations:






PREHEAT WITH STARTER




No Live

Connection

Re-wire fixture as shown below.

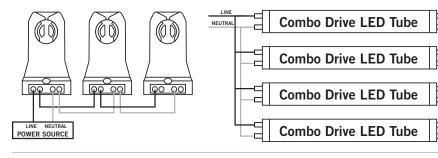




CAUTION: Use only non-shunted lampholders.

Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above.

Keystone can provide any style replacement lampholders. Call us at 800-464-2680.

PHYSICAL CHARACTERISTICS

LAMP DIMENSIONS




A (Illuminated Length)	18.60"
B (Body Length)	23.19"
C (Diameter)	1.00"

NOMINAL LENGTH: 24" BASE TYPE: G13 (Medium Bi-Pin)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED9T8-24GC-835-X-CP	Carton Pack (Egg Crate Packaging)	25	Quick Ship

CATALOG NUMBER BREAKDOWN



Keystone Technologies • 1390 Welsh Road, North Wales, PA 19454 • Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystonetech.com