




## RESIDENTIAL OUTDOOR LIGHT

MODEL: FWL110/FWL220/FWL330/FWL440



| NOMENCLATURE   | LUMENS(LM) | EFFICACY(LPW) | INPUT VOLTAGE | CRI | DISTRIBUTION | EQUIVALENCY(W) | OPERATING TEMP | WARRANTY |
|----------------|------------|---------------|---------------|-----|--------------|----------------|----------------|----------|
| FWL110-15W     | 1700LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 70W MH         | -30-40°C       | 5 YEARS  |
| FWL110-15W-CCT | 1700LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 70W MH         | -30-40°C       | 5 YEARS  |
| FWL220-28W     | 3200LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 100W MH        | -30-40°C       | 5 YEARS  |
| FWL220-28W-CCT | 3200LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 100W MH        | -30-40°C       | 5 YEARS  |
| FWL330-45W     | 5200LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 175W MH        | -30-40°C       | 5 YEARS  |
| FWL440-75W     | 8400LM     | UP TO 118LPW  | 120V          | >70 | N/A          | 250W MH        | -30-40°C       | 5 YEARS  |

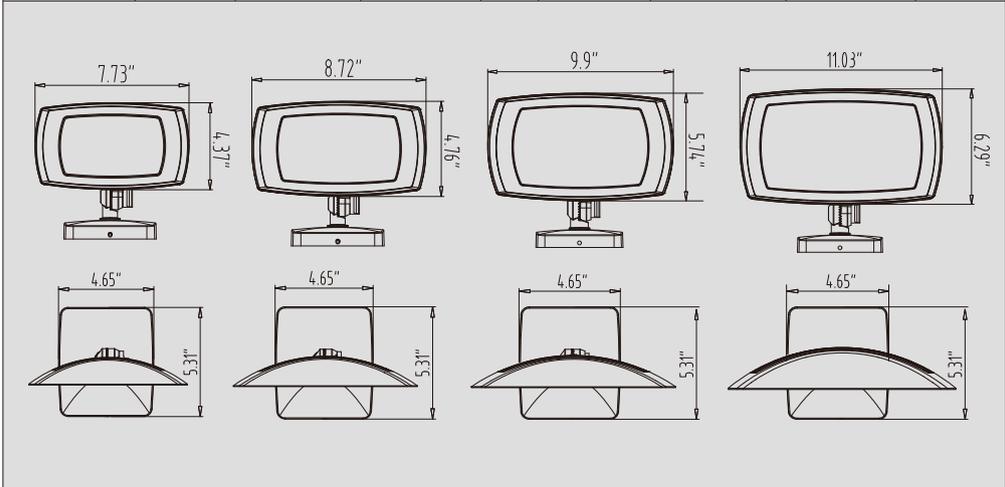

- Wallpack and Floodlight combo. Adjustable wall mount and knuckle are quickly field-installable allowing the fixture to be seamlessly a wallpack and floodlight
- Universal mounting plate with integral wire hooks for easy hands free wall mount installation.
- Impact & weather resistant fixture with die cast housings and clear polycarbonate lenses.
- Photocell included with optional photocell cover
- 2700K, 3000K, 3500K, 4000K, 5000K, CCT adjustable by remote @ 15W/28W
- Name brand chip and DOB technology @ 5 year warranty

US Based Customer Care