

## LED Luminaires

### 4" Temporary Disk Downlight

#### Description

The Temporary Disk Light is engineered to deliver both performance and convenience on the job site. Its low-profile design utilizes quick-connect wiring and is compatible with 2.75", 3.5", and 4" junction boxes, simplifying installation. The diffused lens ensures even illumination without pixelation and its damp-location rating makes it suitable for a wide range of environments. The Temporary Disk Light provides a reliable, efficient, and adaptable lighting solution that remains in place throughout construction phases, offering continuous illumination until permanent fixtures are installed.



#### Specifications




##### Performance

- 5000K Color Temperature
- 78 Lumens per watt
- 90+ CRI
- L70 Lumen Maintenance > 50,000 Hours
- 120VAC Input Voltage
- 5 Year Limited Warranty

##### Construction

- Aluminum Housing
- Acrylic Lens
- Powder Coated White Finish

#### Dimensions

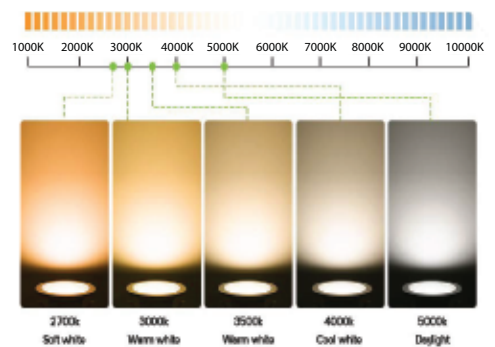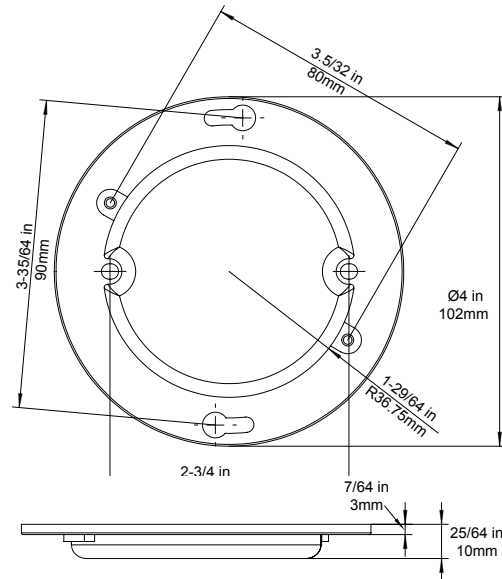

## 4" Temporary Disk Downlight

### Ordering Information

Product SKU	Product Code	Product Description
83138	TDL-4-950-WH-120V-96PK	Temporary Disk Light 4in Round 90CRI 5000K White Trim 120V Non-Dim 96-Pack

### Specifications Table

	TDL-4-950-WH-120V-96PK
Nominal Wattage	10.5W
Delivered Lumens	856
Efficacy (lm/W)	82
CCT	5000K
CRI	90+
Voltage	120V
L70 Lifetime (hrs)	50,000
Power Factor	>0.9
Dimming	Non Dimmable
Housing Material	Steel
Mounting	J-Box
Lens	Acrylic
Operating Temperature	-20°C to 40°C
Listings	cETLus
Environment	Damp Location
Warranty	5 Years Standard

### Photometrics\*

Zonal Lumen Summary		
Zonal	Lumens	% Fixture
0° - 10°	32	4%
10° - 20°	85	10%
20° - 30°	126	15%
30° - 40°	147	17%
40° - 50°	149	17%
50° - 60°	132	15%
60° - 70°	101	12%
70° - 80°	62	7%
80° - 90°	23	3%
0° - 90°	856	100%

