

# QUICKTRONIC® PROStart® T5HO Universal Voltage Systems



**Type CC**  
**Programmed Rapid Start**  
**Normal Ballast Factor**

## High Efficiency Series

### Lamp / Ballast Guide

39W or 24W T5 - PENTRON® HO lamps  
QHE2x39-24T5HO/UNV PSN

Also operates:  
FP39/SS, FP24/SS, FPC22, FT24DL,  
FT36DL

54W T5 - PENTRON® HO lamps  
QHE2x54T5HO/UNV PSN

Also operates:  
FP54/SS, FT55DL, FT50DL, FPC55 and  
L58T8

Two lamp model can be wired for one  
lamp operation.

### Key System Features

- High Efficiency Systems over 90% efficient
- Universal voltage (120-277V)
- Low-profile (1.00" High)
- 1.0 Ballast factor (see table)
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- PROStart programmed rapid start
- UL type CC rated
- Min. Starting Temp:
  - -20°F (-29°C)
- Operates at >42 kHz to reduce potential interference with infrared control systems
- High power factor
- Low harmonic distortion
- Lightweight
- UL, CSA, FCC
- RoHS compliant
- Lead-free solder and manufacturing process



### Application Information

**SYLVANIA QUICKTRONIC High Efficiency T5HO ballasts**

are ideally suited for:

- Commercial & retail
- Hospitality & institutional
- New construction
- Industrial high bay lighting
- Indirect lighting
- Surface mount
- Cove lighting

**SYLVANIA QUICKTRONIC High Efficiency (QHE) PROStart T5HO electronic ballasts** operate PENTRON HO, PENTRON HO Circline and DULUX® L T5 lamps with full lumen output and optimal system performance. These ballasts provides nearly twice the light output (188%) of T8 systems, with the same number of lamps, allowing many new design options. One lamp fixtures can now be used in place of two lamp models.

**QUICKTRONIC High Efficiency T5HO ballasts** offer a minimum starting temperature of -20°F (-29°C) for PENTRON T5HO lamps.

QUICKTRONIC PROStart T5HO ballasts are RoHS compliant and feature lead-free solder and manufacturing process.

The two lamp unit can be wired for one lamp operation, allowing for an

additional 50% reduction in inventory model numbers. The ballast has a 1.18"W x 1.00"H (30mm x 25.4mm) cross section which allows for smaller and unique fixture profiles.

Setting the standard for quality, QUICKTRONIC ballasts are covered by the QUICK 60+® warranty, the first and most comprehensive system warranty in the industry.



### System Information


**SYLVANIA QUICKTRONIC T5HO High Efficiency (QHE) System advantages:**

- Operate from 120V through 277V
  - Eliminates "wrong voltage" errors
  - Reduces inventory by 50%
- Utilizes Programmed Rapid Start operation for
  - Highest System Efficacy
  - Longer Life
  - Over 100,000 switching cycles for occupancy sensor and building control systems applications

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICKSENSE ballast technology will auto reset when the end-of-life lamps are replaced with new ones.

System Type	Input System Power (W)	Initial System Lumens	Mean System Lumens	Initial System Efficacy (lm/W)	Relative Mean Lumens (%)	Energy Savings (%)
FP54T5HO - QTP2x54T5HO/UNV PSN (2-lamp)	121	10,000	9300	83	Baseline	Baseline
FP54T5HO - QHE2x54T5HO/UNV PSN (2-lamp)	119	10,000	9300	84	100%	2%
FP54/50W/SS - QHE2x54T5HO/UNV PSN (2-lamp)	112	10,200	9485	91	102%	7%
FP54/47W/SS - QHE2x54T5HO/UNV PSN (2-lamp)	105	9335	8680	89	93%	13%

\*Fixture efficiency not considered \*Lumen Output for T5HO @ 35°C/95°F \* 120V input voltage

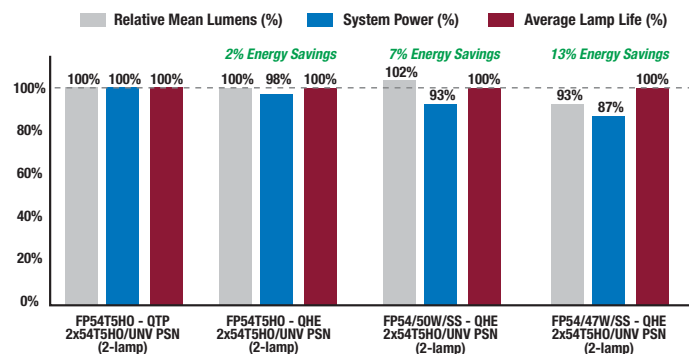

**SPECIFICATION DATA**

Catalog #	Date	Type
Project	Prepared by	
Comments		

**High Efficiency, Type CC & Universal Voltage (120-277V)**





Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp <sup>1</sup> Type	Rated <sup>1</sup> Lumens (lm)	No. of Lamps	Ballast <sup>1</sup> Factor (BF)	System <sup>1</sup> Lumens	Mean <sup>1</sup> Lumens	Input <sup>1</sup> Power (Watts)		System <sup>3</sup> Efficacy (lm/W)	BEF <sup>2</sup>
									120V	277V		
51471 ☉ 51470 ☉	QHE2x54T5HO/UNV PSN 20-pack (without leads) 10-pack (with leads)	1.00/0.43	FP54T5HO	5000	2	1.00	10,000	9300	119	116	86	0.86
		0.94/0.40	FP54/50W/SS	5000	2	1.02	10,200	9485	112	109	94	0.94
		<b>0.89/0.38</b>	<b>FP54/47W/SS</b>	<b>4575</b>	<b>2</b>	<b>1.02</b>	<b>9335</b>	<b>8680</b>	<b>105</b>	<b>103</b>	<b>91</b>	<b>0.99</b>
		0.88/0.37	FT55DL	4800	2	0.86	8255	7680	106	105	79	0.82
		0.90/0.42	FT50DL	4300	2	1.04	8945	8320	110	108	83	0.96
		0.92/0.39	L58	5200	2	0.85	8840	8220	111	108	82	0.79
		0.82/0.35	FPC55	4000	2	0.80	6400	5950	96	94	68	0.85
		0.53/0.23	FP54T5HO	5000	1	1.05	5250	4885	62	61	86	1.72
		0.49/0.21	FP54/50W/SS	5000	1	1.05	5250	4885	58	58	91	1.81
		<b>0.45/0.20</b>	<b>FP54/47W/SS</b>	<b>4575</b>	<b>1</b>	<b>1.03</b>	<b>4710</b>	<b>4380</b>	<b>53</b>	<b>53</b>	<b>89</b>	<b>1.94</b>
0.49/0.21	FT55DL	4800	1	0.92	4415	4105	56	55	80	1.67		
0.51/0.22	FT50DL	4300	1	1.09	4685	4360	57	57	82	1.91		
0.48/0.21	L58	5200	1	0.87	4525	4205	57	57	79	1.53		
0.45/0.20	FPC55	4000	1	0.81	3240	3015	49	49	66	1.65		
51479 ☉ 51478 ☉	QHE2x39/24T5HO/UNV PSN 20-pack (without leads) 10-pack (with leads)	0.70/0.30	FP39T5HO	3500	2	1.00	7000	6510	83	81	86	1.23
		0.65/0.28	FP39/35W/HO/SS	3500	2	1.01	7070	6575	77	76	93	1.33
		0.47/0.21	FP24T5HO	2000	2	1.00	4000	3720	54	53	75	1.89
		0.43/0.19	FP24/21W/HO/SS	2000	2	1.01	4040	3757	51	50	81	2.02
		0.37/0.16	FP39T5HO	3500	1	1.01	3535	3288	42	42	84	2.40
		0.35/0.16	FP39/35W/HO/SS	3500	1	1.02	3570	3320	41	40	89	2.55
		0.25/0.12	FP24T5HO	2000	1	1.01	2020	1879	29	29	70	3.48
		0.23/0.11	FP24/21W/HO/SS	2000	1	1.02	2040	1897	27	27	76	3.78

<sup>1</sup> At 35°C lamp ambient temperature.  
<sup>2</sup> Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).  
<sup>3</sup> System Efficacy calculation based on lowest input power value.  
 ☉ Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.

**Installation Notes**

- Ground ballast case
- Install in accordance with the National Electrical Code
- Insulate unused leads for 600V

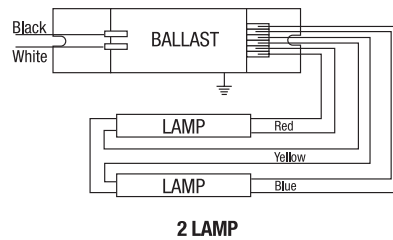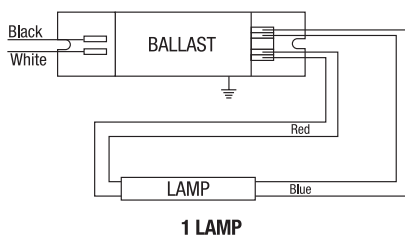

**Dimensions:**

Model QHE2x54T5HO/UNV PSN enclosure size:  
 Overall: 16.73"L x 1.18"W x 1.00"H (425mm L x 30mm W x 25.4mm H)  
 Mounting: 16.34" (415mm)


Model QHE2x39/24T5HO/UNV PSN enclosure size:  
 Overall: 14.17"L x 1.18"W x 0.87"H (360mm L x 30mm W x 22mm H)  
 Mounting: 13.74" (349mm)

**Wiring:**

51471 & 51479: Push-in connectors  
 51470 & 51478: Push-in connectors with leads  
 Use 18AWG solid copper wire only

**Product Weight:**

51471: 0.88 lb (0.40kg) each (approx.)  
 51470: 1.0 lb (0.45kg) each (approx.)  
 51479: 0.68 lb (0.30kg) each (approx.)  
 51478: 0.80 lb (0.36kg) each (approx.)

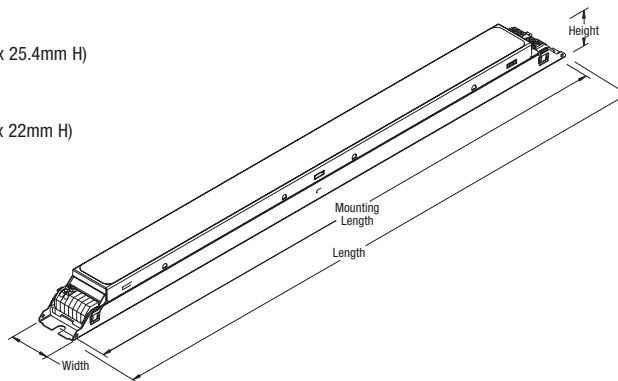

**System Life / Warranty**

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

**OSRAM SYLVANIA**  
 National Customer  
 Service and Sales Center  
 1-800-LIGHTBULB  
 (1-800-544-4828)  
 www.sylvania.com



Item Number **51471 QHE 2 x 54T5HO UNV PSN** Starting/Ballast Factor  
 QUICKTRONIC High Efficiency Line Voltage (120-277V)  
 Number of Lamps (2) Primary Lamp Wattage