



KTEB-286HO-UV-PS-N

T8HO ELECTRONIC BALLAST

Version D4



DESCRIPTION

2 x F96T8HO | 120-277 Multi-Voltage | High Power Factor | Program Start

STARTING METHOD: Program Start

LAMP CONNECTION: Series

INPUT VOLTAGE: 120-277Vac \pm 10%

INPUT FREQUENCY: 50/60 Hz

POWER FACTOR: High

WARRANTY: 5 Years

PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Meets ANSI Standard C82.11 and C62.41
- UL, cUL Listed Class P, Type 1 Outdoor
- Type HL, Type CC
- No PCB's

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Nominal Line Amps	Power Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD	Crest Factor
F96T8HO	2	120V	187W	1.57A	>0.90	0.95	0.51	<10%	<1.70
		277V	184W	0.67A	>0.90	0.95	0.52	<10%	<1.70
	1	120V	96W	0.80A	>0.90	1.00	1.04	<10%	<1.70
		277V	96W	0.36A	>0.90	1.00	1.04	<12%	<1.70
F48T8HO	2	120V	93W	0.75A	>0.90	0.98	1.02	<10%	<1.70
		277V	93W	0.34A	>0.90	0.98	1.02	<12%	<1.70
	1	120V	49W	0.41A	>0.90	1.01	2.06	<10%	<1.70
		277V	49W	0.19A	>0.90	1.01	2.06	<15%	<1.70

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS

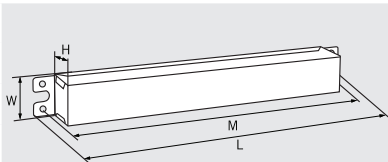

LENGTH	11.75"
WIDTH	1.7"
HEIGHT	1.18"
MOUNTING	11.14"

STANDARD LEAD LENGTHS*

BLACK	25"
WHITE	25"
BLUE	46"
RED	46"
YELLOW	70"

CASE MATERIAL: Steel

*Consult Keystone for special lead length requirements.





KTEB-286HO-UV-PS-N

T8HO ELECTRONIC BALLAST

Version D4

WIRING DIAGRAM

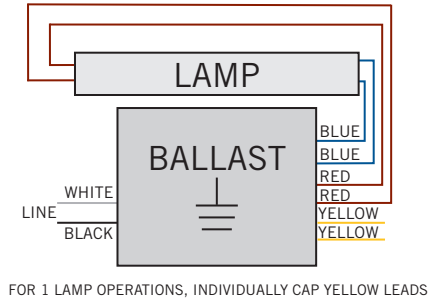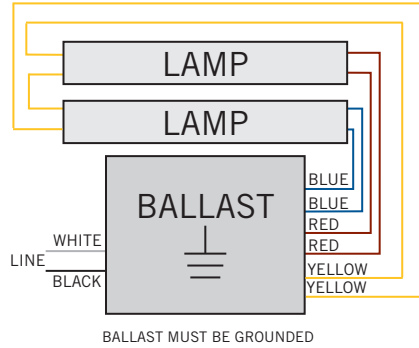

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-286HO-UV-PS-N-CP	Carton Pack	10	Active

CATALOG NUMBER BREAKDOWN

