

# SPECIFICATION SHEET : SC-120-213-LT5

This Is An Original Product From Fulham Co., Inc


## Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,

#### This Ballast Will Operate Following Lamps.

a []

### F8T5 / F13T5 / F14T5 / F21T5

INPUT VOLT: 120V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	F13T5	F14T5	F8+F13T5	F21T5		-	-		-	-
LAMPS OPERATED	2		1							
INPUT WATTS	32.55W	33.63W	25.72W	24.52W						
LINE CURRENT:	0.473A	0.493A	0.384A	0.373A						
POWER FACTOR	0.575	0.566	0.557	0.546						
BALLAST FACTOR	1.075	1.074	1.370	1.007						
EFFICACY FACTOR	3.302	3.193	5.325	4.109						
THD	122.6%	124.5%	134.3%	139.1%						
CURRENT CREST FACTOR	1.502	1.462	1.503	1.497						
EMI/RFI COMPLIANCE	FCC PART 18-A (NON-Consumer)									
SOUND RATING	" A "									
BALLAST TYPE	RAPID START									
VOLTAGE TRANSIENTS	ANSI 62.41									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	EOL									
MIN. OPERATING TEMP	-10°C (14°F )									
MAX. CASE TEMP	75 °C ( 167 ° F )									
ENERGY STAR 4.0										
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR									

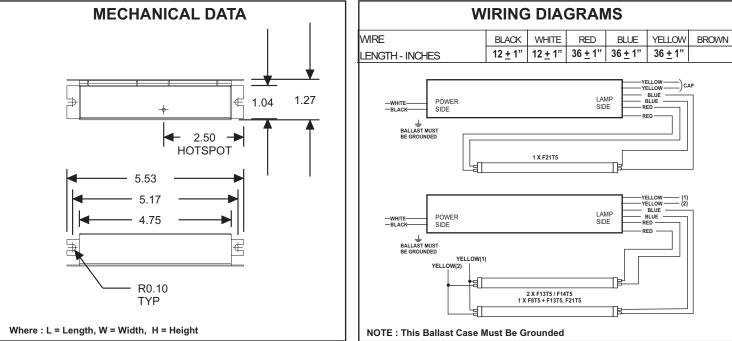

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>2 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>. DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM CO., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED. Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com

#### 2006-29 rev H

#### **ELECTRICAL DATA**