


CONSTANT VOLTAGE LED **POCKET DRIVERS**

The Pocket Driver packs a 60 or 100 watt punch despite being $\frac{1}{4}$ the size of a conventional driver!


- Small size without compromising performance
- Minimal shadowing
- Small size eliminates the need for remote mounting
- Fits into a wide range of applications
- High power factor
- Multivolt input (120V/277V)
- Lightweight and easy to store
- Suitable for dry and damp locations



PRODUCT DIMENSIONS (ACTUAL SIZE)

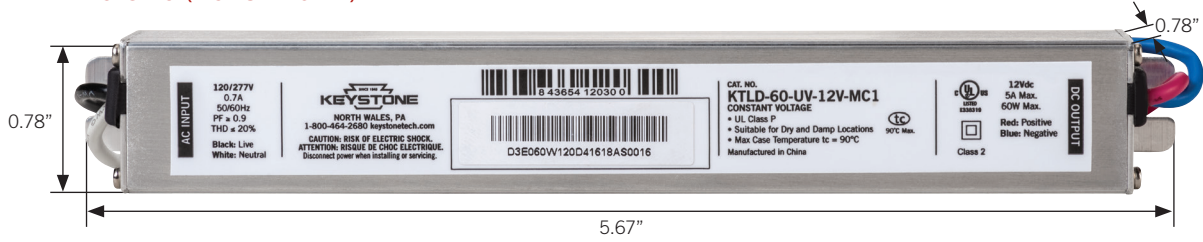

Catalog Number	Overall Length	Mounting	Case Length	Height	Width
KTLD-60-UV-12V-MC1	5.67"	5.51"	5.12"	0.78"	0.78"

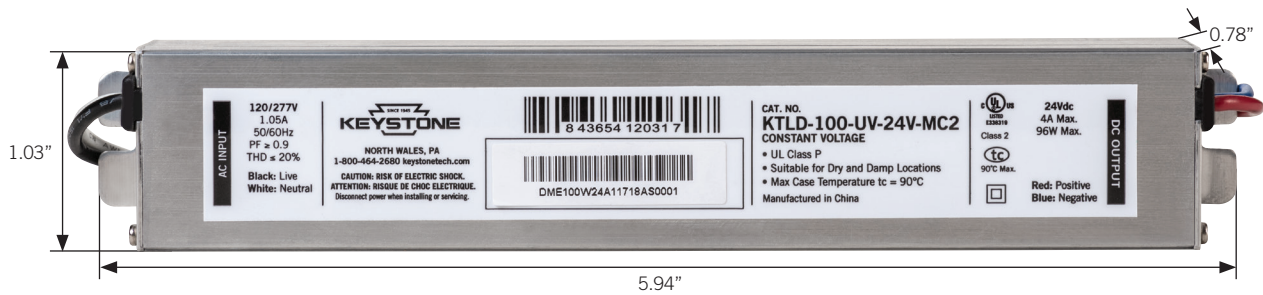

Catalog Number	Overall Length	Mounting	Case Length	Height	Width
KTLD-100-UV-24V-MC2	5.94"	5.78"	5.40"	1.03"	0.78"

ELECTRICAL SPECIFICATIONS



Catalog Number	Max. Output Power	Output Current	Output Voltage	Input Voltage	Max. Input Current	Typical Efficiency at 120V	Typical Efficiency at 240V	Typical Efficiency at 277V	Class 2	
									US	Canada
KTLD-60-UV-12V-MC1	60W	5A	12V	120/277Vac	0.70A @120V 0.30A @277V	89%	91%	91%	✓	✓
KTLD-100-UV-24V-MC2	100W	4A	24V	120/277Vac	1.05A @120V 0.48A @277V	89%	92%	92%	✓	✓

*under 120/277Vac input with 80~100% load condition

TYPICAL APPLICATIONS

