

**SCM SLIM CANOPY CCT3**

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

**DESCRIPTION**

LBS Lighting's SCM IP65 rated fixtures come in an aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. The SCM fixtures are available in selectable wattages and selectable color temperatures. The SCM supports both pendant mounting and direct surface mounting ceiling or wall. Pendant mounting accepts a 3/4" NPT thread and can be mounted to multiple types c J-boxes.



**APPLICATIONS**








Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

**Rated Life 50,000 Hours  
Warranty 5 Years**

**FEATURES**

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 3CCT (30/40/50K)
- Selectable Wattages
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160° (Parking Garages)
- Dimmable: 0-10V
- CRI: >80
- Operating temperature: - 40°F - 122°F
- Material: aluminum die-cast
- Colors: Black /White
- 5 Year Warranty
- Optional for purchase: Microwave Sensor, Frosted/ Drop Lens, Photocell, Emergency Driver

**ACCESSORIES**

-  Emergency Driver
-  Motion Sensor
-  Beauty Plate
-  Drop Lens
-  Frosted Lens
-  Surge Protector
-  Photocell

**SAMPLE NUMBER FX10SCM60SW/8CCT3/BK**

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
FX Fixture	10 10-inch	SCM Slim Canopy	60SW 60 Selectable Wattages	8CCT3 CRI 80 Selectable CCT (30/40/50K)	BK Black (WH) White



## ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Efficacy (lm/w)	Color	IP65 Rated	DLC (S/P)
28	<b>9545</b>	FX10SCM60SW/8CCT3/BK	3CCT	3,640	250	125	Black	•	P
45			(30/40/50K)	5,850		140			
60				7,800		130			
60	<b>9546</b>	FX13SCM100SW/8CCT3/BK	3CCT	7,800	400	120	Black	•	P
80			(30/40/50K)	10,400		140			
100				13,000		130			
28	<b>9547</b>	FX10SCM60SW/8CCT3/WH	3CCT	3,640	250	125	White	•	P
45			(30/40/50K)	5,850		140			
60				7,800		130			

## ACCESSORIES (Ordered Separately)

### Motion Sensor



P10438 SEN-HB001VCR-1  
(Microwave Motion Sensor 0-10V Internal 12V)

### Emergency Driver



7336 BAEM4-60BC/MV-A  
(Emergency Driver for 60SW-10")



7334 BAEM15-48BC/MV-A  
(Emergency Driver for 100SW-13")

### Photocell



P10036 SEN-PHO-BT-MT/MV  
(Button Photocell 120V-277)

### Beauty Plates



P10195 PLT-SCM/14X14/WH  
(14"x14" Beauty Plate used with SCM)

P10196 PLT-SCM/24X24/WH  
(24"x24" Beauty Plate used with SCM)

### Frosted Lens



P10125 LENS-SCM/FR9X9  
(Frosted Lens for SCM 10")

### Drop Lens



P10126 LENS-SCM/DR9X9  
(Drop Lens for SCM 10")

### Surge Protector



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)




P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)




P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)

**DIMENSIONS**


**60SW- 10"x10"**  
5.51-lbs

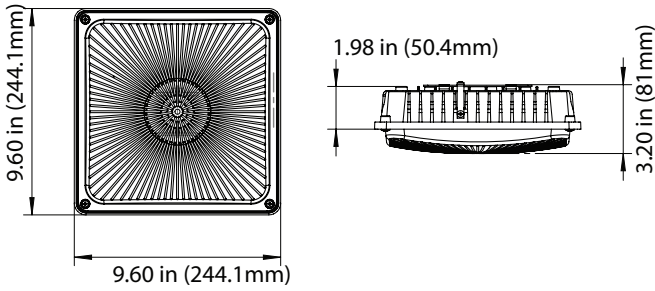


**100SW-13"x13"**  
7.72-lbs

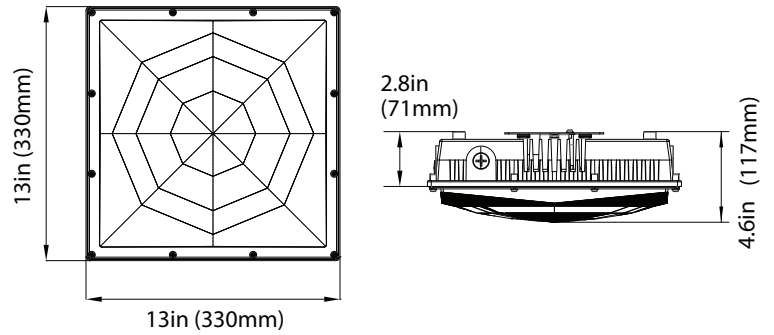

**60SW with Frosted Lens Cover (P10125)**

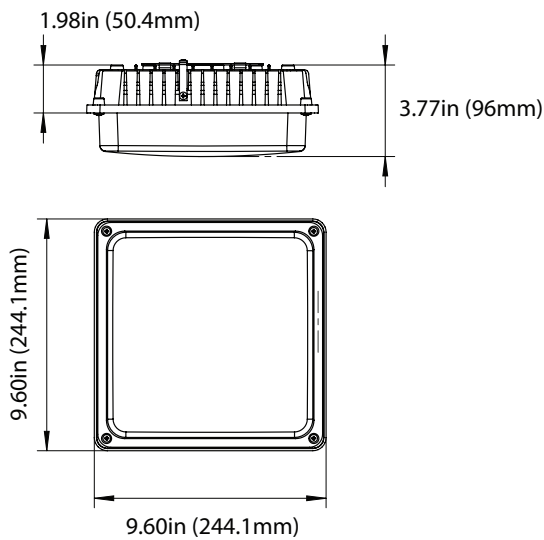


**60SW with Drop Lens (P10126)**

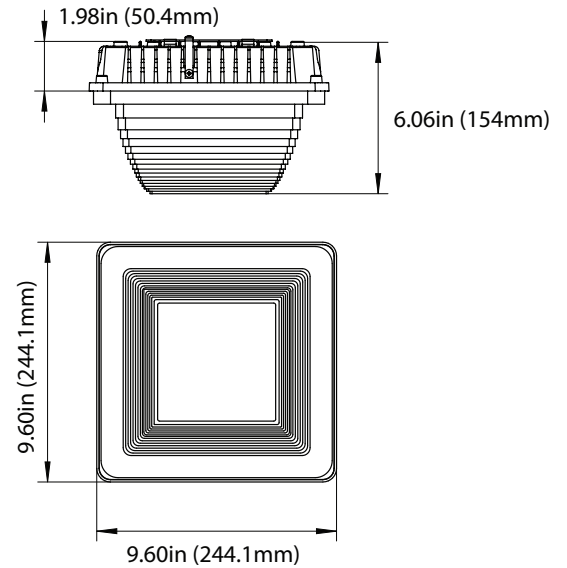

**PHOTOMETRICS CHART**


**60 Watt**  
DLC Premium

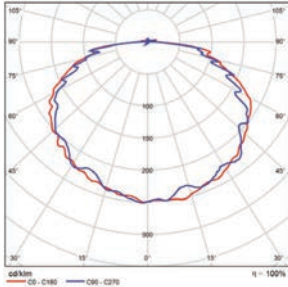

	Center Beam Fc	Beam Width	
2.5R	300 fc	14.3 ft	12.6 ft
5.0R	75.1 fc	28.6 ft	25.3 ft
7.5R	33.4 fc	42.9 ft	37.9 ft
10.0R	18.8 fc	57.1 ft	50.5 ft
12.5R	12.0 fc	71.4 ft	63.1 ft
15.0R	8.35 fc	85.7 ft	75.8 ft

■ Vert. Spread: 141.4°  
■ Horiz. Spread: 136.8°


**60 Watt**  
10" Canopy + P10125 Frosted Lens

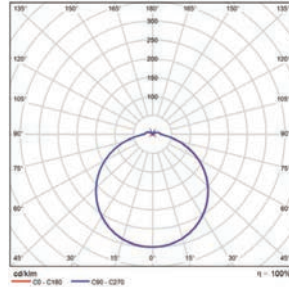

	Center Beam Fc	Beam Width	
2.5R	314 fc	8.4 ft	8.5 ft
5.0R	78.5 fc	16.9 ft	17.0 ft
7.5R	34.9 fc	25.3 ft	25.5 ft
10.0R	19.6 fc	33.7 ft	33.9 ft
12.5R	12.6 fc	42.2 ft	42.4 ft
15.0R	8.72 fc	50.6 ft	50.9 ft

■ Vert. Spread: 118.7°  
■ Horiz. Spread: 119.0°


**60 Watt**  
10" Canopy + P10126 Drop Lens

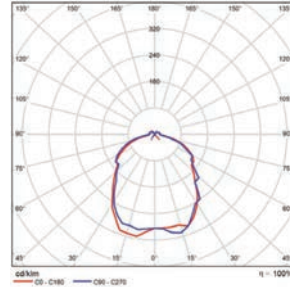

	Center Beam Fc	Beam Width	
2.5R	319 fc	5.6 ft	5.5 ft
5.0R	79.8 fc	11.3 ft	11.1 ft
7.5R	35.4 fc	16.9 ft	16.6 ft
10.0R	19.9 fc	22.5 ft	22.1 ft
12.5R	12.8 fc	28.2 ft	27.7 ft
15.0R	8.86 fc	33.8 ft	33.2 ft

■ Vert. Spread: 96.9°  
■ Horiz. Spread: 95.8°

**100 Watt**  
DLC Premium

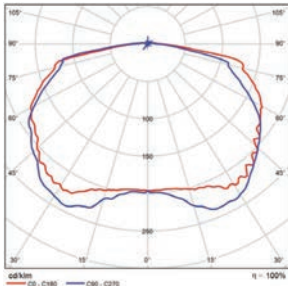

	Center Beam Fc	Beam Width	
2.5R	374 fc	19.0 ft	16.4 ft
5.0R	93.5 fc	37.9 ft	32.8 ft
7.5R	41.6 fc	56.9 ft	49.2 ft
10.0R	23.4 fc	75.9 ft	65.6 ft
12.5R	15.0 fc	94.9 ft	82.0 ft
15.0R	10.4 fc	113.8 ft	98.4 ft

■ Vert. Spread: 150.5°  
■ Horiz. Spread: 146.1°

**PACKAGE**

Case Qty 1 pc

