


**22W LAMP - 120V  
80CRI**

# EOS LED LAMP

- AC Driver-On-Board Technology
- Multiple Mounting Options
- Data Per NVLAP Accredited Laboratory
- Electronic Dimming (see page 112)
- Energy Star CSD
- 5 Year Limited Warranty\*

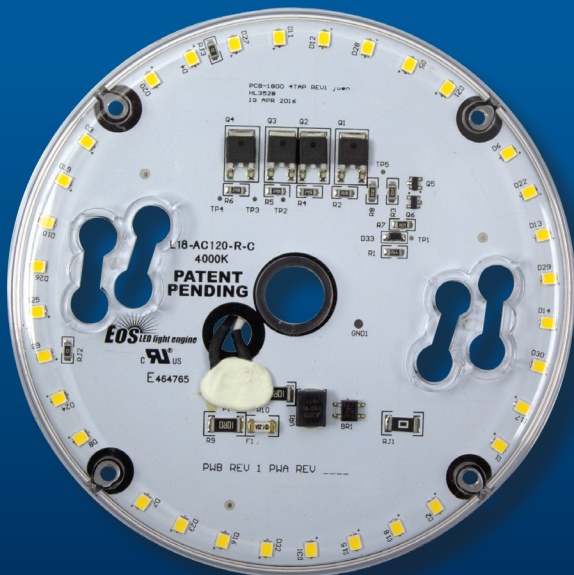

RoHS  
compliant


## SPECIFICATIONS

- Input Voltage: 120VAC; 50/60Hz
- 22 Watt
- Available in 3000K or 4000K
- High power factor > 0.95
- Estimated 50,000 hrs L70
- Optical grade polycarbonate lens
- Multiple mounting options for easy install
- Can be used to comply with 2016 Title 24 part 6 High Efficacy LED Light Source Requirements In Outdoor Applications
- On board line surge protection
- Optional supplemental surge protection
- 18" 18 AWG Leads
- UL file: E464765 Certified under UL Standard 8750
- FCC compliance Class B

### LUMENS & CCT @ 80CRI


**22W EOS LAMP**  
1950lm, 3000K = 88lm/W  
2130lm, 4000K = 96lm/W

Photometrics available on request

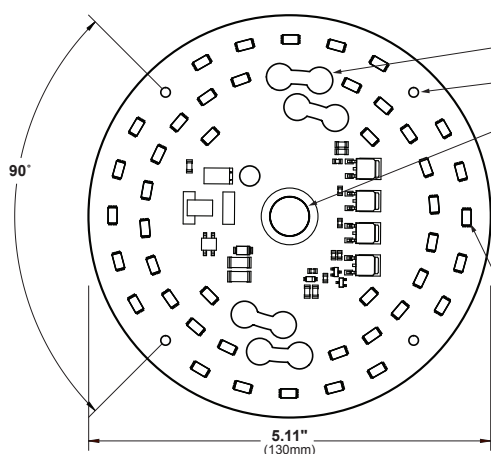

### Mounting Options

- Key Hole Slots on 2.75" & 3.56" Bolt Circle
- 1/8" Mounting Holes on 4.46" Bolt Circle
- .49" Center Mount for use with 1/8" IP nipple mount (hand tighten to avoid cracking)



**OPTIONAL HARDWARE PART # 10-266**  
Includes 4ea. 8-32 X 3/8" Self Tapping Screws  
HARDWARE SOLD SEPERATELY - SEE PAGE 109

1598C Retrofit Kits, Heat Sinks, &  
Supplemental Surge Protection Available.

TC POINT: INSIDE LENS COVER BELOW 80°C

### IMPORTANT

**\*PRODUCT MUST BE  
INSTALLED WITH PROPER  
HEAT DISSIPATION.  
LED-MOV1 REQUIRED FOR  
OUTDOOR APPLICATIONS.**

**SEE UL TERMS OF  
ACCEPTABILITY ON  
PAGE 113 PRIOR TO  
INSTALLATION.**

**HEAT SINK NOT INCLUDED**

### PART NUMBER GUIDE

**L18 - AC120R - W**

L18 22W

AC120R 120V INPUT VOLTAGE  
80CRI

W 3000K  
C 4000K