

LED WALL PACKS (MWK04)

WATTAGES: 30W/25W/18W



The MWK04 is designed as a decorative architectural wall fixture offering refined one-way light distribution. Its sculpted form and precision-engineered structure deliver impressive optical performance, while flexible accessories ensure a user-friendly lighting experience. The integrated die-cast aluminum housing features a UV-resistant powder coat finish for long-lasting corrosion protection. A built-in dusk-to-dawn photocell automatically turns the fixture on at night and off at sunrise for effortless operation. Ideal for both residential and public low-rise environments, it provides functional illumination with a modern aesthetic.



FEATURES

- High luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V/AC 120-347V.
- Die-cast aluminum cooling design, high quality and better cooling for LED Tj < 85°C.
- Excellent optics design, greatly improve the light utilization and evenness .
- Motion sensor control available (Optional)


SPECIFICATION	
MODEL	SS-MWK04-30W-X-TCP-Y
WATTAGE	30W/25W/18W
EFFICACY	Up to 120LPW
CCT	3000K/4000K/5000K
CRI	Ra 70
INPUT VOLTAGE	AC120-277V / AC120-347V
DISTRIBUTION	Semi- Cutoff
POWER FACTOR	0.95
DRIVER EFFICACY	90%
DIMMING	0-10Vdc
LIFE SPAN	over 50,000 hrs
WORKING TEMPERATURE	-40°F ~113°F
STORAGE TEMPERATURE	-40°F ~176°F
OUTDOOR RATING	Wet location/IP65
CABLE	5 core,18AWG 0.16m
WARRANTY	5 year limited

LED WALL PACKS (MWK04)

WATTAGES: 30W/25W/18W

DIMENSION (ORDERING GUIDE):

30W/25W/18W

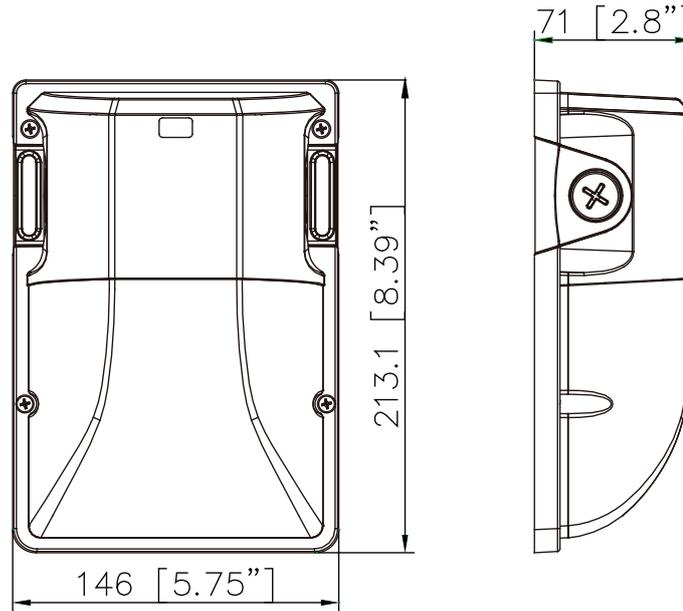

Model Number	inner box (L*W*H)	Outer box (L*W*H)	Net Weight	Gross Weight	Qty/Ctn (pcs)
30W/24W/18W	8.78*5.98*3.15 iNch 223*152*80mm	16.92*12.91*18.5 inch 430*328*470mm	35.27 Lbs(16 Kg)	37.14 Lbs(16.85 Kg)	20pcs/ctn

ORDERING GUIDE:

EXAMPLE:

SS-MWK04-30W-H-X-TCP-Y

SS	MWK	30W	H	X	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	VOLTAGE	Power & CCT selectable	CONTROL
Wall pack Light	30W=30W/25W/18W			Blank=120-277V MV=120-347V HV=277-480V		F: Photocell Blank: no provide sensor

WATTAGE	CURRENT(VOLTAGE)(AMP)				
	120V	208V	240V	277V	347V
SS-MWK04-30W-X-TCP-Y-zz	0.28Amp	0.16Amp	0.14Amp	0.12Amp	0.10Amp





LED WALL PACKS (MWK04)

WATTAGES: 30W/25W/18W

DISTRIBUTION

MWK04-30W-50K

For complete IES files, please visit our website.

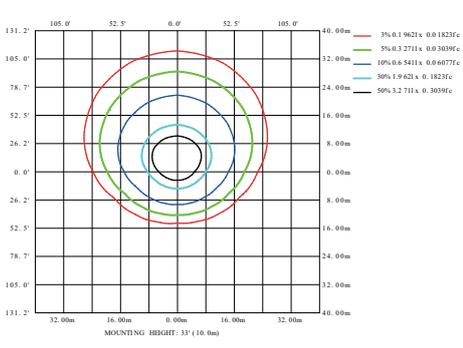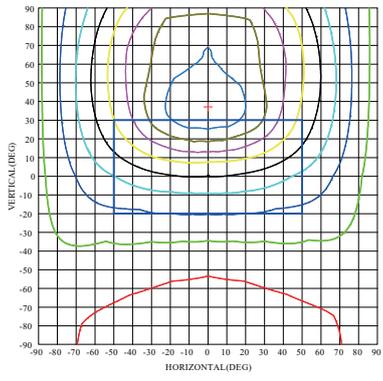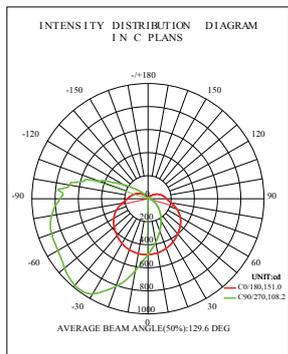

Applications

