

# naturalLED®

Turning Light into Savings ▶▶▶

## SWP Slim Wall Pack

### 15W, 29W, 50W

naturalLED® SWP is our slim, low-profile wall pack with smooth contemporary design. Well engineered high quality die-cast aluminum which delivers bright, crisp light.

Excellent thermal design ensures our SWP's performance over the life.

Installation made simple and easy with a hinged junction box. Our Slim-Wallpacks are available in 15 watt, 29 watt, and 50 watt with color options of White, Black and Bronze. Optional ½" knuckle mount or adjustable swivel bracket provide you the flexibility for your application.

SWP is ideal for landscape, wall/surface, low level pathway, apartment buildings, schools, multi-use facilities.

#### Key Features & Benefits

- ▶ DesignLights Consortium Certified
- ▶ Uniform and consistent color
- ▶ Aluminum die cast housing
- ▶ Excellent thermal design
- ▶ CRI:70
- ▶ Universal Voltage 120-277V
- ▶ Operating Temp: -22°F~122°F
- ▶ 50,000 Hours rated average life
- ▶ Photocell sensor compatible

#### Applications





- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting

#### 3 Color Choices




#### Qualifications



Item Code	Description	Color Temp	Wattage	Lumen Output	Depth	Equivalent Wattage	CRI	Finish	Rated Life				
7462	LED-FXSWP15/40K/BK	4000K	15	1,740	4-in	75W	70	Black	50,000	●	●	●	●
7463	LED-FXSWP15/50K/BK	5000K	15	1,797	4-in	75W	70	Black	50,000	●	●	●	●
7452	LED-FXSWP29/40K/BK	4000K	29	3,268	4-in	175W	70	Black	50,000	●	●	●	●
7453	LED-FXSWP29/50K/BK	5000K	29	3,329	4-in	175W	70	Black	50,000	●	●	●	●
7548	LED-FXSWP50/40K/BK	4000K	50	5,508	4-in	250W	70	Black	50,000		●	●	●
7549	LED-FXSWP50/50K/BK	5000K	50	5,856	4-in	250W	70	Black	50,000		●	●	●
7464	LED-FXSWP15/40K/WH	4000K	15	1,740	4-in	75W	70	White	50,000	●	●	●	●
7465	LED-FXSWP15/50K/WH	5000K	15	1,797	4-in	75W	70	White	50,000	●	●	●	●
7460	LED-FXSWP29/40K/WH	4000K	29	3,268	4-in	175W	70	White	50,000	●	●	●	●
7461	LED-FXSWP29/50K/WH	5000K	29	3,329	4-in	175W	70	White	50,000	●	●	●	●
7550	LED-FXSWP50/40K/WH	4000K	50	5,508	4-in	250W	70	White	50,000		●	●	●
7551	LED-FXSWP50/50K/WH	5000K	50	5,856	4-in	250W	70	White	50,000		●	●	●
7572	LED-FXSWP15/40K/DB	4000K	15	1,740	4-in	75W	70	Bronze	50,000	●	●	●	●
7573	LED-FXSWP15/50K/DB	5000K	15	1,797	4-in	75W	70	Bronze	50,000	●	●	●	●
7574	LED-FXSWP29/40K/DB	4000K	29	3,268	4-in	175W	70	Bronze	50,000	●	●	●	●
7575	LED-FXSWP29/50K/DB	5000K	29	3,329	4-in	175W	70	Bronze	50,000	●	●	●	●
7576	LED-FXSWP50/40K/DB	4000K	50	5,508	4-in	250W	70	Bronze	50,000		●	●	●
7577	LED-FXSWP50/50K/DB	5000K	50	5,856	4-in	250W	70	Bronze	50,000		●	●	●

Accessories

P10005	MT-SB-SWP/BK	Swivel Bracket Mount (Black)
P10006	MT-KNC-SWP/BK	Knuckle Mount (Black)
P10007	MT-SF-SWP/BK	Slip Fitter Mount (Black)
P10019	MT-SB-SWP/WH	Swivel Bracket Mount (White)
P10020	MT-KNC-SWP/WH	Knuckle Mount (White)
P10021	MT-SF-SWP/WH	Slip Fitter Mount (White)
P10074	MT-SB-SWP/DB	Swivel Bracket Mount (Bronze)
P10075	MT-KNC-SWP/DB	Knuckle Mount (Bronze)
P10076	MT-SF-SWP/DB	Slip Fitter Mount (Bronze)
P10036	SEN-PHO-BT-MT/MV	Button Photocell (120-277V)

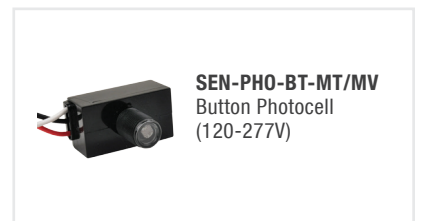

► Dimensions







15W 29W 50W		A	B	C	D	E
		5.25-in	6.30-in	7.87-in	4.00-in*	4.75-in

\* Applies to ADA (Americans with Disabilities Act) Standard

► Mounting Dimensions

		a	b	c
<p>Knuckle mount</p>		4.21-in	4.65-in	4.21-in
<p>Slip Fitter</p>		7.04-in	2.95-in	3.25-in
<p>Swivel Bracket</p>		4.68-in	5.47-in	1.37-in

► Illuminance Distribution

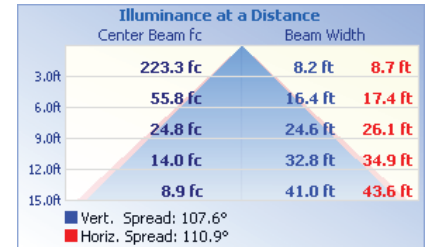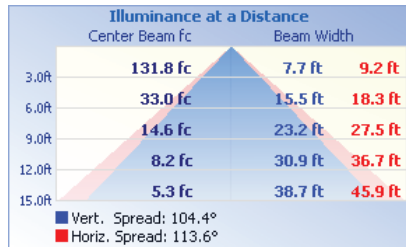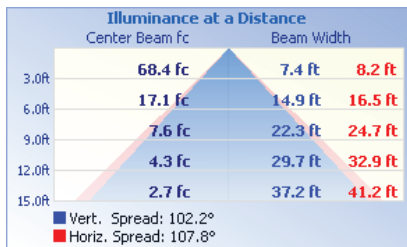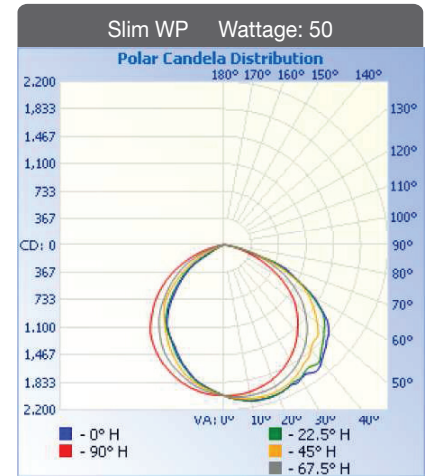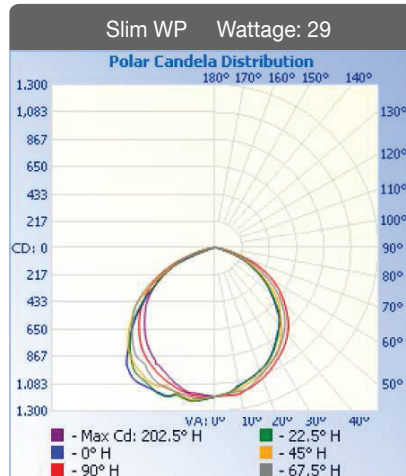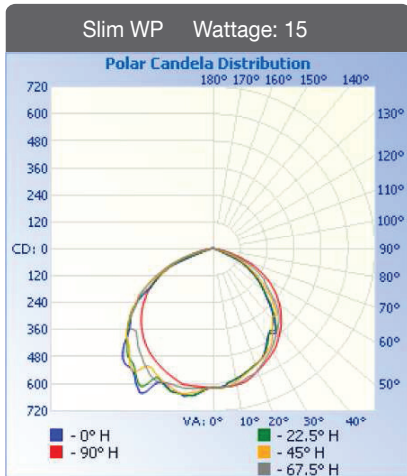

► Master Carton Package

