

Version	2.0	Date	9/28/2021
Prepared By	C.L.		

PRODUCT SPECIFICATION

Category	Flush Mount - Modern
Item Number	9357
Stock Code	LED14FMM-180L9CCT5-NI
Mounting	Surface
Housing Color	White + Sand Nickel

PICTURE



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	24	Replacement Wattage (W)	150
Tested Wattage (W)	24		
Input Voltage (V)	120	Surge Protect Level	DM=1KV , CM=2KV
Voltage Frequency (Hz)	60		
Input Current (A)	0.24	Dimmable	Incandescent Dimming
Power Factor	>0.9	AUX (12V) Line	No
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	1800	CCT (K)	2700 / 3000 / 3500 / 4000 / 5000
Efficacy (lm/w)	75	Beam Angle (°)	110
CRI	90		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	5 ~ 104
Storage Temperature (°F)	-4 ~ 113
IP Rating	Damp location
Rated Life	50000 hrs.
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description

PRODUCT DIMENSIONS

Width- in (mm)	14.17" (360mm)
Height- in (mm)	3.46" (88mm)
Depth- in (mm)	14.17" (360mm)
EPA (ft²)	N/A
Weight (lbs)	2.29
Mounting Height (ft)	>7.8
Cable Length (ft)	-

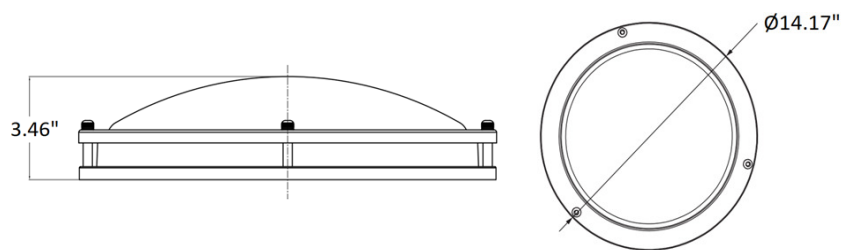

CERTIFICATIONS

UL/ETL	cETLus	CEC	✓
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	✓

COMMENTS
