

Version	V1.0	Date	1/16/2024
Prepared By	J.C		

PRODUCT SPECIFICATION

Category	Cut Off Wall Pack
Item Number	9553
Stock Code	FXCWP60SW/CCT3/BZ-PHO
Mounting	Wall Mount
Housing Color	Bronze



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	28/40/60W	Replacement Wattage (W)	100/175/250
Tested Wattage (W)	63.69		
Input Voltage (V)	120-277	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.537	AUX (12V) Line	No
Power Factor	>0.9	Photocell	Yes
THD	≤20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	8176.5	CCT (K)	3000K/4000K/5000K
Efficacy (lm/w)	128.43	Beam Angle (°)	Forward Throw
CRI	>70		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	- 40°F ~ 122°F
Storage Temperature (°F)	- 40°F ~ 176°F
IP Rating	IP65
Rated Life	50,000
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description
P10540	SEN-ANT-11-WH	Sensor-12V Microwave 0-10V, need P10380
P10316	SEN-BRI-RC100	Remote programmer for P10540
P10380	BA-BQE03-0250-12	120-347V to 12V Power supply (no relay)
7336	BAEM4-60BC/MV-A	4W Emergency Battery Backup Driver
7334	BAEM15-48BC/MV-A	15W Emergency Battery Backup Driver

PRODUCT DIMENSIONS

Width- in (mm)	14.20"	360mm
Height- in (mm)	9.25"	235mm
Length- in (mm)	6.50"	166mm
EPA (ft ²)	-	
Weight (lbs)	7.05	
Mounting Height (ft)	10~20	
Cable Length (ft)	1.98	

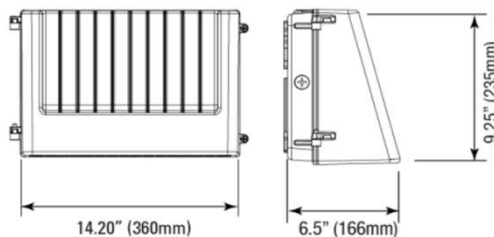

CERTIFICATIONS

UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	
DLC	5.1 Premium	RoHs	

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS

--