

Version	2.0	Date	1/19/2022
Prepared By	J.C		

PRODUCT SPECIFICATION

Category	Flood Light
Item Number	9584
Stock Code	FXFDL50/76/50K/BZ-KNC
Mounting	1/2" Knuckle Mount
Housing Color	Bronze (RAL#8019)



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	50	Replacement Wattage (W)	150-200
Tested Wattage (W)	50.79		
Input Voltage (V)	120 ~277	Surge Protect Level	1.5KV
Voltage Frequency (Hz)	50/60	Dimmable	1-10V
Input Current (A)	0.43	AUX (12V) Line	-
Power Factor	≥ 0.9		
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	6626	CCT (K)	5000
Efficacy (lm/w)	130	Beam Angle (°)	NEMA 7Hx6V
CRI	80		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-40 ~ 122
Storage Temperature (°F)	-40 ~ 158
IP Rating	IP65
Rated Life	50000 hrs.
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description

PRODUCT DIMENSIONS

Width- in (mm)	8.5"	215.7
Height- in (mm)	9.93"	252.2
Depth- in (mm)	1.94"	49.1
EPA (ft²)	-	-
Weight (lbs)	3.52	-
Mounting Height (ft)	-	-
Cable Length (ft)	-	-

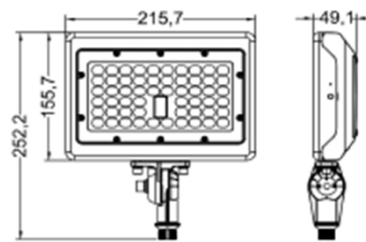

CERTIFICATIONS

UL/ETL	cULus	CEC	
NSF/ETL Sanitation		JAB	
Energy Star		FCC	✓
DLC	V5.1 Premium	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS

--