

## SAL Slim Area Light (40K,50K, CCT3)

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® Slim Area Light is constructed with a durable, die-cast aluminum housing and excellent thermal design and is the perfect lighting solution for your parking lot, street, walkway, building flood up/down light and/or as a sign lighter. It provides uniform, consistent color with a wide range of wattage selections to replace from 100W to 1500W HID fixtures. Our fixtures are DLC Premium certified and IP66 rated with four types of mounting options available: Pole Mount, Slip Fitter, Wall Mount, and Yoke Mount. Compatible integrated autonomous and photocell motion sensors are available as options to address your energy savings. Energy savings can be as much as 85% while eliminating maintenance costs in labor and lamp and ballast replacement.



**Rated Life 50,000 Hours**  
**Warranty 7 Years\***

### APPLICATIONS

Area/ Parking, Security, Pathway, Perimeter, Wall Lighting

### FEATURES

- DLC Premium
- IP66 Rated
- ETL Listed/ cETL Listed
- IK08
- Selectable Wattages
- Color Temp: 3CCT (30K/40K/50K), 4000K, 5000K
- Voltage: 120-277V, 277-480V
- Power Factor: >0.9
- Surge Protection: 10KV
- Dimmable: 0-10V
- CRI: 80
- Operating temperature: - 40°F~122°F (- 40°C~50°C)
- Low Voltage Output for Sensors
- Contractor Friendly Mounting Options
- Material: Aluminum Die-Cast
- Finish: Epoxy Powder Coat
- Colors: Bronze, White, Black
- 7 Year Warranty
- Optional for Purchase: Lens, Photocell, Mountings, Sensors

### ACCESSORIES

	Pole Mount Arm		Shorting Cap
	Slip Fitter		Photocell
	Yoke Mount		Lens- Type 3 or 4
	Receptacle		Pole Brackets
	Sensors		Wall Mount
	Surge Protection		Glass Shield

## SAMPLE NUMBER FXSAL75SW/8CCT3/BZ/T3

FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	LENS
FX Fixture	SAL Slim Area Light	75SW, 100W 75 Selectable Wattage 100 Watt	8CCT3, 850 CRI 80 Selectable Color Temp (3000, 4000, 5000K) CRI 80 / 5000K	BZ, BK, WH (BZ) Bronze (BK) Black (WH) White	T3 Type III



# SLIM AREA LIGHT

## WALL & AREA LUMINAIRES

\*P= Premium DLC / \*S = Standard DLC

### ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP66 Rated	DLC (S/P)
25	<b>9605</b>	FXSAL75SW/8CCT3/BZ/T3*	3CCT (3K/4K/5K)	3,500	100-400	Bronze	•	P
50				7,000				
75				10,555				
90	<b>7647</b>	FXSAL150SW/830/BZ/T3*	3000K	12,649	400-575	Bronze	•	P
120				16,800				
150				21,163				
90	<b>9639</b>	FXSAL150SW/840/BZ/T3*	4000K	12,649	400-575	Bronze	•	P
120				16,800				
150				21,163				
90	<b>9640</b>	FXSAL150SW/850/BZ/T3*	5000K	12,649	400-575	Bronze	•	P
120				16,800				
150				21,118				
160	<b>7648</b>	FXSAL240SW/830/BZ/T3*	3000K	22,400	400-1000	Bronze	•	P
190				26,600				
240				34,829				
160	<b>9610</b>	FXSAL240SW/840/BZ/T3	4000K	22,400	400-1000	Bronze	•	P
190				26,600				
240				34,829				
160	<b>9611</b>	FXSAL240SW/850/BZ/T3	5000K	22,500	400-1000	Bronze	•	P
190				30,000				
240				34,680				
25	<b>9647</b>	FXSAL75SW/8CCT3/BZ/T3/480*	3CCT (3K/4K/5K)	3,500	400	Bronze	•	P
50				7,000				
75				10,555				
90	<b>7649</b>	FXSAL150SW/830/BZ/T3/480*	3000K	12,888	400-575	Bronze	•	P
120				16,800				
150				21,535				
90	<b>7650</b>	FXSAL150SW/840/BZ/T3/480*	4000K	12,888	400-575	Bronze	•	P
120				16,800				
150				21,417				
90	<b>9641</b>	FXSAL150SW/850/BZ/T3/480*	5000K	12,914	400-575	Bronze	•	P
120				16,800				
150				21,535				
160	<b>7651</b>	FXSAL240SW/830/BZ/T3/480*	3000K	22,400	400-1000	Bronze	•	P
190				26,600				
240				34,829				
160	<b>9618</b>	FXSAL240SW/840/BZ/T3/480*	4000K	22,400	400-1000	Bronze	•	P
190				26,600				
240				34,829				
160	<b>9619</b>	FXSAL240SW/850/BZ/T3/480*	5000K	22,500	400-1000	Bronze	•	P
190				30,000				
240				34,680				

277-480V  
Bronze

\*Made to order

# SLIM AREA LIGHT

## WALL & AREA LUMINAIRES

\*P= Premium DLC / \*S = Standard DLC

### ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP66 Rated	DLC (S/P)
25 50 75	<b>9622</b>	FXSAL75SW/8CCT3/WH/T3	3CCT (3K/4K/5K)	3,500 7,000 10,555	100-400	White	•	P
90 120 150	<b>7652</b>	FXSAL150SW/830/WH/T3*	3000K	12,649 16,800 21,163	400-575	White	•	P
90 120 150	<b>7653</b>	FXSAL150SW/840/WH/T3*	4000K	12,649 16,800 21,163	400-575	White	•	P
90 120 150	<b>7654</b>	FXSAL150SW/850/WH/T3*	5000K	12,649 16,800 21,118	400-575	White	•	P
160 190 240	<b>7655</b>	FXSAL240SW/830/WH/T3*	3000K	22,400 26,600 34,829	400-1000	White	•	P
160 190 240	<b>9627</b>	FXSAL240SW/840/WH/T3	4000K	22,400 26,600 34,829	400-1000	White	•	P
160 190 240	<b>9628</b>	FXSAL240SW/850/WH/T3	5000K	22,500 30,000 34,680	400-1000	White	•	P
25 50 75	<b>7656</b>	FXSAL75SW/8CCT3/WH/T3/480*	3CCT (3K/4K/5K)	3,500 7,000 10,555	400	White	•	P
90 120 150	<b>7657</b>	FXSAL150SW/830/WH/T3/480*	3000K	12,888 16,800 21,535	400-575	White	•	P
90 120 150	<b>7658</b>	FXSAL150SW/840/WH/T3/480*	4000K	12,888 16,800 21,417	400-575	White	•	P
90 120 150	<b>7659</b>	FXSAL150SW/850/WH/T3/480*	5000K	12,914 16,800 21,535	400-575	White	•	P
160 190 240	<b>7660</b>	FXSAL240SW/830/WH/T3/480*	3000K	22,400 26,600 34,829	400-1000	White	•	P
160 190 240	<b>9627</b>	FXSAL240SW/840/WH/T3/480*	4000K	22,400 26,600 34,829	400-1000	White	•	P
160 190 240	<b>9628</b>	FXSAL240SW/850/WH/T3/480*	5000K	22,500 30,000 34,680	400-1000	White	•	P

277-480V  
White

\*Made to order

# SLIM AREA LIGHT

## WALL & AREA LUMINAIRES

\*P= Premium DLC / \*S = Standard DLC

### ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP66 Rated	DLC (S/P)
25	<b>9649</b>	FXSAL75SW/8CCT3/BK/T3	3CCT (3K/4K/5K)	3,500	100-400	Black	•	P
50				7,000				
75				11,224				
90	<b>7661</b>	FXSAL150SW/830/BK/T3*	3000K	12,649	400-575	Black	•	P
120				16,800				
150				21,163				
90	<b>7662</b>	FXSAL150SW/840/BK/T3*	4000K	12,649	400-575	Black	•	P
120				16,800				
150				21,163				
90	<b>7663</b>	FXSAL150SW/850/BK/T3*	5000K	12,649	400-575	Black	•	P
120				16,800				
150				21,118				
160	<b>7664</b>	FXSAL240SW/830/BK/T3*	3000K	22,400	400-1000	Black	•	P
190				26,600				
240				34,829				
160	<b>7665</b>	FXSAL240SW/840/BK/T3	4000K	22,400	400-1000	Black	•	P
190				26,600				
240				34,829				
160	<b>7666</b>	FXSAL240SW/850/BK/T3	5000K	22,500	400-1000	Black	•	P
190				30,000				
240				34,680				
25	<b>9657</b>	FXSAL25/8CCT3/BZ/T3*	3CCT (3K/4K/5K)	3,500	75	Bronze	•	P
42	<b>9658</b>	FXSAL42/8CCT3/BZ/T3*	3CCT (3K/4K/5K)	6,090	150	Bronze	•	P
50	<b>9659</b>	FXSAL50/8CCT3/BZ/T3*	3CCT (3K/4K/5K)	7,000	250	Bronze	•	P
100	<b>9660</b>	FXSAL100/830/BZ/T3*	3000K	14,633	400	Bronze	•	P
100	<b>9606</b>	FXSAL100/840/BZ/T3	4000K	14,633	400	Bronze	•	P
100	<b>9607</b>	FXSAL100/850/BZ/T3	5000K	14,638	400	Bronze	•	P
150	<b>9648</b>	FXSAL150/830/BZ/T3*	3000K	21,118	400-575	Bronze	•	P
150	<b>9608</b>	FXSAL150/840/BZ/T3	4000K	21,163	400-575	Bronze	•	P
150	<b>9609</b>	FXSAL150/850/BZ/T3	5000K	21,118	400-575	Bronze	•	P
320	<b>9661</b>	FXSAL320/830/BZ/T3*	3000K	46,227	1000-1500	Bronze	•	P
320	<b>9612</b>	FXSAL320/840/BZ/T3	4000K	46,227	1000-1500	Bronze	•	P
320	<b>9613</b>	FXSAL320/850/BZ/T3	5000K	46,454	1000-1500	Bronze	•	P
25	<b>9662</b>	FXSAL25/8CCT3/BZ/T3/480*	3CCT (3K/4K/5K)	3,500	75	Bronze	•	P
42	<b>9663</b>	FXSAL42/8CCT3/BZ/T3/480*	3CCT (3K/4K/5K)	6,090	150	Bronze	•	P
50	<b>9664</b>	FXSAL50/8CCT3/BZ/T3/480*	3CCT (3K/4K/5K)	7,000	250	Bronze	•	P
103	<b>9614</b>	FXSAL100/840/BZ/T3/480*	4000K	14,710	400	Bronze	•	P
102	<b>9615</b>	FXSAL100/850/BZ/T3/480*	5000K	14,679	400	Bronze	•	P
150	<b>9616</b>	FXSAL150/840/BZ/T3/480*	4000K	21,417	400-575	Bronze	•	P
150	<b>9617</b>	FXSAL150/850/BZ/T3/480*	5000K	21,535	400-575	Bronze	•	P
325	<b>9620</b>	FXSAL320/840/BZ/T3/480*	4000K	45,830	1000-1500	Bronze	•	P
325	<b>9621</b>	FXSAL320/840/BZ/T3/480*	5000K	45,963	1000-1500	Bronze	•	P

Bronze

\*Made to order

# SLIM AREA LIGHT

## WALL & AREA LUMINAIRES

### ORDERING


\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP66 Rated	DLC (S/P)
100	<b>9623</b>	FXSAL100/840/WH/T3	4000K	14,638	400	White	•	P
100	<b>9624</b>	FXSAL100/850/WH/T3	5000K	14,638	400	White	•	P
150	<b>9625</b>	FXSAL150/840/WH/T3	4000K	21,163	400-575	White	•	P
150	<b>9626</b>	FXSAL150/850/WH/T3	5000K	21,118	400-575	White	•	P
320	<b>9629</b>	FXSAL320/840/WH/T3	4000K	46,454	1000-1500	White	•	P
320	<b>9630</b>	FXSAL320/850/WH/T3	5000K	46,454	1000-1500	White	•	P
100	<b>9650</b>	FXSAL100/850/BK/T3	5000K	14,638	400	Black	•	P
150	<b>9651</b>	FXSAL150/850/BK/T3	5000K	21,118	400-575	Black	•	P


\*Made to order

**DIMENSIONS**

**75/100/150W**  
8.00-lbs

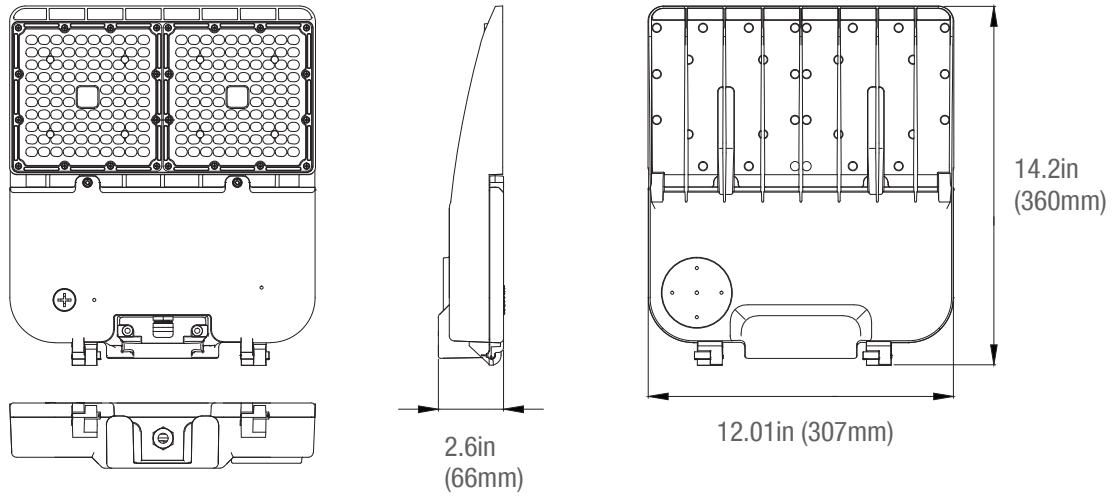



**240/320W**  
15.50-lbs

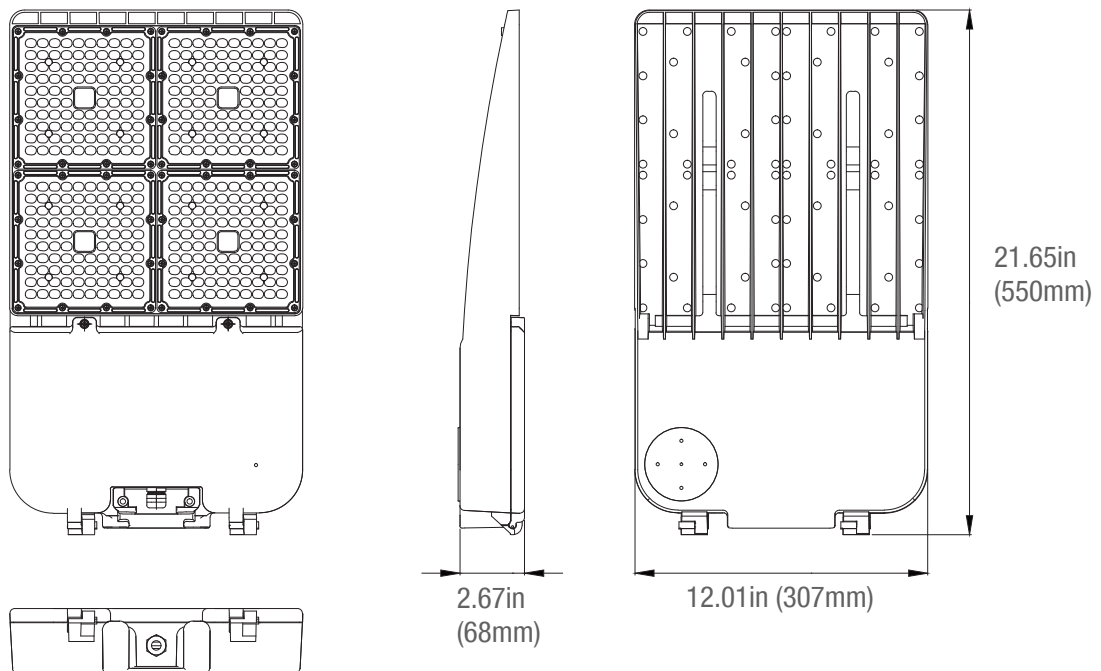

**MOUNTINGS (Ordered Separately)**



**Pole Mount 6"**

- P10453 MT-AL/PM6/BZ
- P10458 MT-AL/PM6/WH
- P10468 MT-AL/PM6/BK

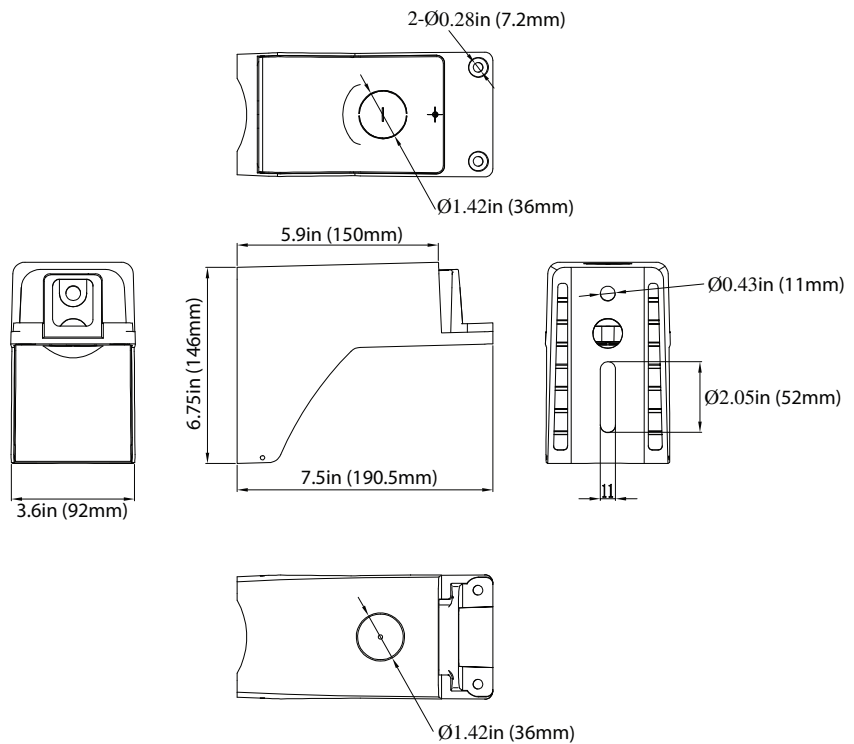

**Slip Fitter**

- P10455 MT-AL/SF/BZ
- P10460 MT-AL/SF/WH
- P10470 MT-AL/SF/BK

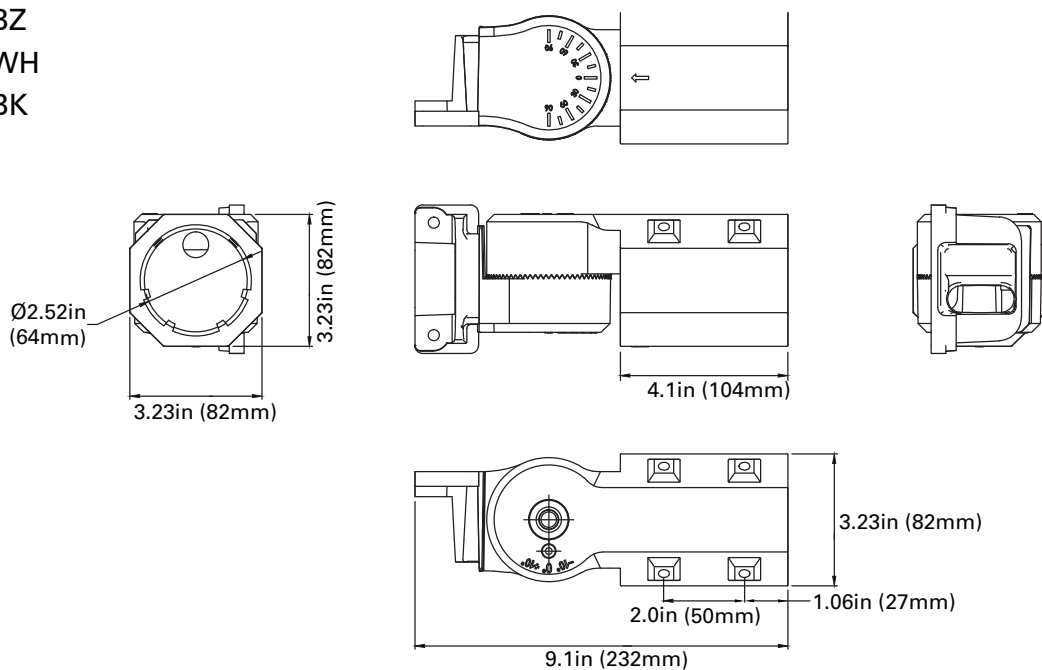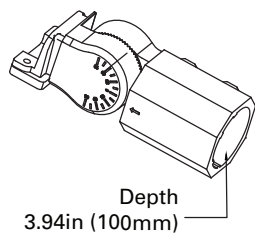



**MOUNTINGS (Ordered Separately)**

**Yoke Mount 12"**

P10456 MT-SAL/YK12/BZ

P10461 MT-SAL/YK12/WH

P10471 MT-SAL/YK12/BK

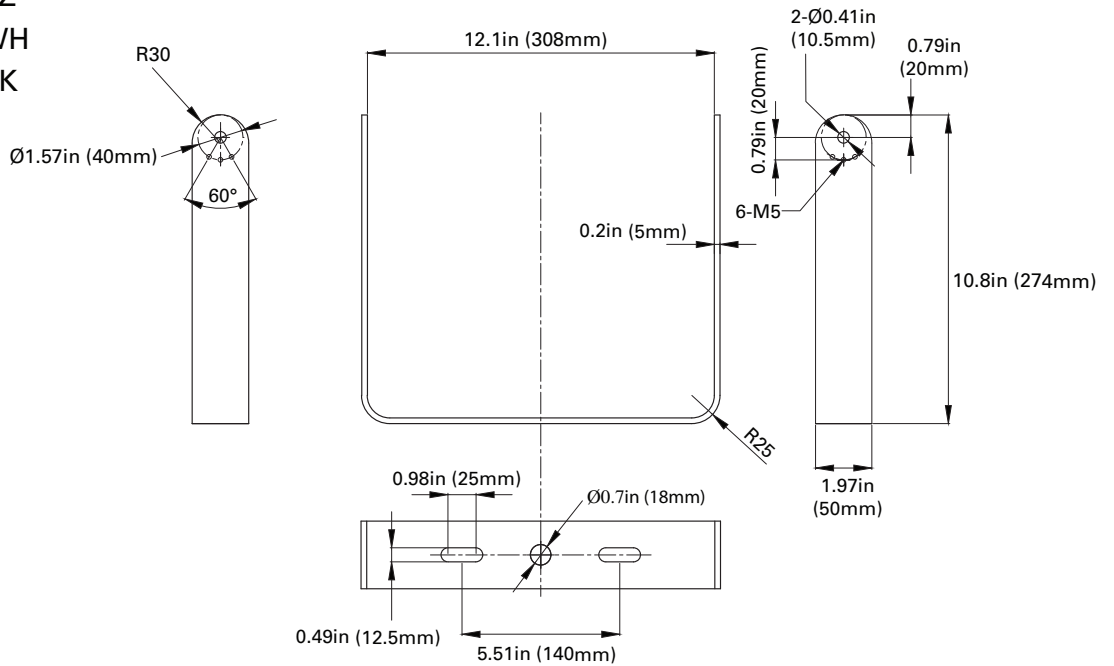



**Wall Mount**

P10473 MT-AL/WM/BZ

P10474 MT-AL/WM/WH

P10475 MT-AL/WM/BK

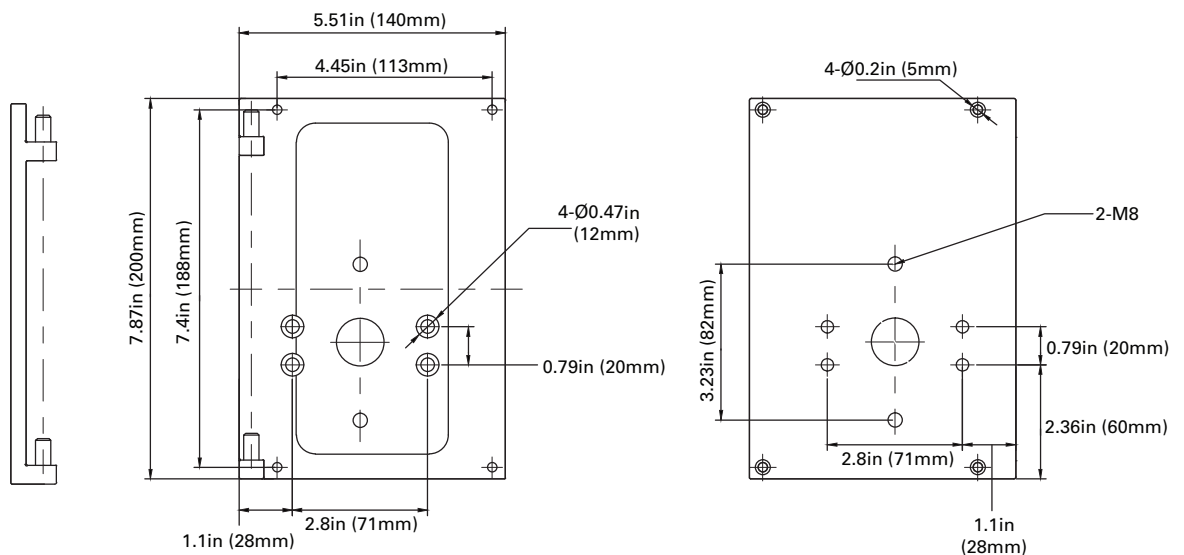



### ACCESSORIES (Ordered Separately)

#### 6" Pole Mount Arm



P10453 MT-AL/PM6/BZ  
(6" Pole Mount Arm Bronze)



P10458 MT-AL/PM6/WH  
(6" Pole Mount Arm White)



P10468 MT-AL/PM6/BK  
(6" Pole Mount Arm Black)

#### Slip Fitter



P10455 MT-AL/SF/BZ  
(Slip Fitter Mount Bronze)



P10460 MT-AL/SF/WH  
(Slip Fitter Mount White)



P10470 MT-AL/SF/BK  
(Slip Fitter Mount Black)

#### Wall Mount



P10473 MT-AL/WM/BZ  
(Wall Mount Bronze)



P10474 MT-AL/WM/WH  
(Wall Mount White)



P10475 MT-AL/WM/BK  
(Wall Mount Black)

#### Yoke Mount



P10456 MT-SAL/YK12/BZ  
(12" Yoke Mount Bronze)



P10461 MT-SAL/YK12/WH  
(12" Yoke Mount White)



P10471 MT-SAL/YK12/BK  
(12" Yoke Mount Black)

#### Twist Lock Receptacle



P10141 REC3PLK  
(Twist Lock Photocell & Receptacle  
Mount 120-480V 3 Prong)



P10142 REC7PLK  
(Twist Lock Photocell & Receptacle  
Mount 120-480V 7 Prong)

#### Type III & IV Lens



P10466 LENS-SAL-T3-G1  
(Type III Lens)

P10467 LENS-SAL-T4-G1  
(Type IV Lens)

P10499 LENS-SAL-T5-G1  
(Type V Lens)

P10500 LENS-SAL-T3-BLC-G1  
(Type 3 Back Light Cut Lens)

#### Individual Sensors



P10371 SEN-BRI619  
(PIR Motion/Photocell 0-10V Bi-Level  
Control IP66 12-24V IR Sensor)



P10316 SEN-BRI-RC100  
(Remote Programmer for P10371)

#### Glare Shield



P10481 GSFB-SAL/BZ  
(Glare Shield- Bronze)

P10482 GSFB-SAL/WH  
(Glare Shield- White)

P10483 GSFB-SAL/BK  
(Glare Shield- Black)

#### Surge Protection



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)



P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)

#### Shorting Cap



P10053 SEN-PHO-LK-MT-SRT  
(Twist Lock Photocell Shorting Cap  
120-480V 3 Prong)

#### Dusk to Dawn Photocell



K141030 REC3PLK/PHO  
(Twist Lock Photocell & Receptacle  
120-277V 3 Prong)

**POLE BRACKETS (Ordered Separately)**




**Round Pole Mount Tenon**  
P10348 MT-3RTV2.5-1/BZ  
(3" Round Pole with 2-3/8" Tenon)

P10349 MT-4RTV2.5-1/BZ  
(4" Round Pole with 2-3/8" Tenon)

P10350 MT-5RTV2.5-1/BZ  
(5" Round Pole with 2-3/8" Tenon)



**Spoke Mount Bracket - 90°**  
P10359 MT-2.5RTBH2.5-290/BZ  
(Spoke Mount Bracket with Double 2-3/8" -90°)




**Square Pole Mount with Double - 180°**  
P10360 MT-4STV2.5-2180/BZ  
(4" Square Pole Mount with Double 2-3/8" Tenon)




**Square Pole Mount Tenon**  
P10351 MT-3STV2.5-1/BZ  
(3" Square Pole with 2-3/8" Tenon)

P10352 MT-4STV2.5-1/BZ  
(4" Square Pole with 2-3/8" Tenon)


P10353 MT-5STV2.5-1/BZ  
(5" Square Pole with 2-3/8" Tenon)



**Square Pole Mount with Triple - 180°**  
P10361 MT-4STV2.5-3180/BZ  
(4" Square Pole Mount with Triple 2-3/8" Tenon)




**Square Pole Mount with Quad - 90°**  
P10362 MT-4STV2.5-490/BZ  
(4" Square Pole Mount with Quad 2-3/8" Tenon)




**Bullhorns with Double -180°**  
P10356 MT-2.5RTBV2.5-2180/BZ  
(Bullhorn with Double 2-3/8" Tenon-180°)



**Wall Mount Bracket**  
P10363 MT-4WM2.5-1/BZ  
(Wall Mount Bracket with 2-3/8" Tenon)




**Bullhorns with Triple -180°**  
P10357 MT-2.5RTBV2.5-3180/BZ  
(Bullhorn with Triple 2-3/8" Tenon-180°)



**Angled Mount Bracket - 90°**  
P10364 MT-4WM2.5-190/BZ  
(90° Angled Wall Mount with 2-3/8" Tenon)




**Light Pole Cap**  
P10354 MT-4STC/BK  
(4" Square Pole Cap)



**Bullhorns with Triple -120°**  
P10358 MT-2.5RTBV2.5-3120/BZ  
(Bullhorn with triple 2-3/8" Tenon-120°)

PHOTOMETRICS CHART


75 Watt - Type 3  
DLC Premium

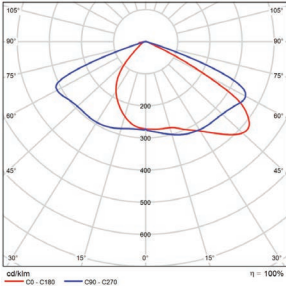

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	453 fc	4.7 ft	8.8 ft
5.0R	113 fc	9.3 ft	17.6 ft
7.5R	50.4 fc	14.0 ft	26.4 ft
10.0R	28.3 fc	18.7 ft	35.2 ft
12.5R	18.1 fc	23.3 ft	44.0 ft
15.0R	12.6 fc	28.0 ft	52.8 ft

■ Vert. Spread: 86.0°  
■ Horiz. Spread: 120.8°


75 Watt - Type 4  
DLC Premium

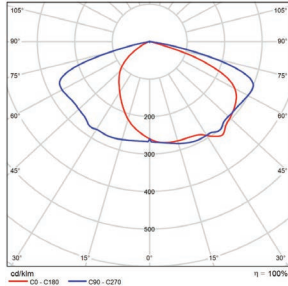

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	437 fc	6.7 ft	8.3 ft
5.0R	109 fc	13.3 ft	16.5 ft
7.5R	48.6 fc	20.0 ft	24.8 ft
10.0R	27.3 fc	26.7 ft	33.0 ft
12.5R	17.5 fc	33.4 ft	41.3 ft
15.0R	12.1 fc	40.0 ft	49.5 ft

■ Vert. Spread: 106.3°  
■ Horiz. Spread: 117.6°


75 Watt - Type 5  
DLC Premium

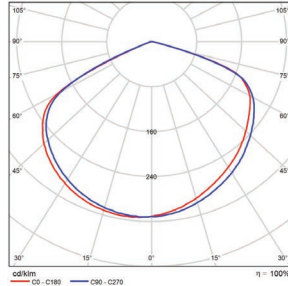

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	523 fc	11.3 ft	11.1 ft
5.0R	131 fc	22.6 ft	22.1 ft
7.5R	58.1 fc	33.9 ft	33.2 ft
10.0R	32.7 fc	45.2 ft	44.2 ft
12.5R	20.9 fc	56.5 ft	55.3 ft
15.0R	14.5 fc	67.9 ft	66.3 ft

■ Vert. Spread: 132.3°  
■ Horiz. Spread: 131.3°


100 Watt - Type 3  
DLC Premium

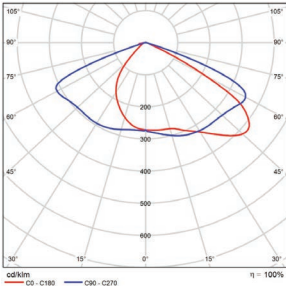

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	607 fc	4.7 ft	8.8 ft
5.0R	152 fc	9.3 ft	17.6 ft
7.5R	67.4 fc	14.0 ft	26.4 ft
10.0R	37.9 fc	18.7 ft	35.2 ft
12.5R	24.3 fc	23.3 ft	44.0 ft
15.0R	16.9 fc	28.0 ft	52.8 ft

■ Vert. Spread: 86.0°  
■ Horiz. Spread: 120.8°


100 Watt - Type 4  
DLC Premium

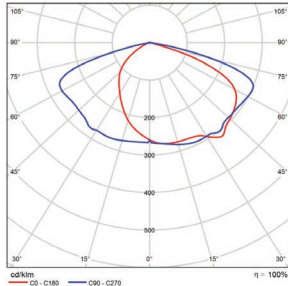

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	585 fc	6.7 ft	8.3 ft
5.0R	146 fc	13.3 ft	16.5 ft
7.5R	65.0 fc	20.0 ft	24.8 ft
10.0R	36.6 fc	26.7 ft	33.0 ft
12.5R	23.4 fc	33.4 ft	41.3 ft
15.0R	16.3 fc	40.0 ft	49.5 ft

■ Vert. Spread: 106.3°  
■ Horiz. Spread: 117.6°


100 Watt - Type 5  
DLC Premium

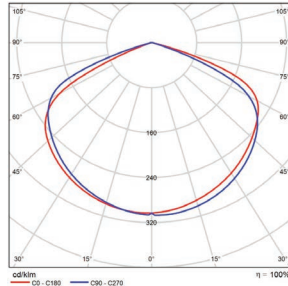

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	690 fc	11.2 ft	11.3 ft
5.0R	172 fc	22.4 ft	22.7 ft
7.5R	76.6 fc	33.6 ft	34.0 ft
10.0R	43.1 fc	44.8 ft	45.3 ft
12.5R	27.6 fc	56.0 ft	56.6 ft
15.0R	19.2 fc	67.1 ft	68.0 ft

■ Vert. Spread: 131.9°  
■ Horiz. Spread: 132.4°


150 Watt - Type 3  
DLC Premium

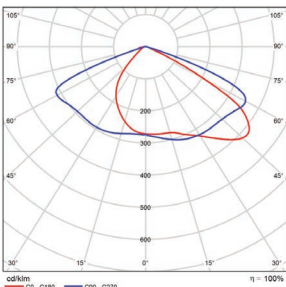

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	919 fc	4.7 ft	8.8 ft
5.0R	230 fc	9.3 ft	17.6 ft
7.5R	102 fc	14.0 ft	26.4 ft
10.0R	57.4 fc	18.7 ft	35.2 ft
12.5R	36.8 fc	23.3 ft	44.0 ft
15.0R	25.5 fc	28.0 ft	52.8 ft

■ Vert. Spread: 86.0°  
■ Horiz. Spread: 120.8°


150 Watt - Type 4  
DLC Premium

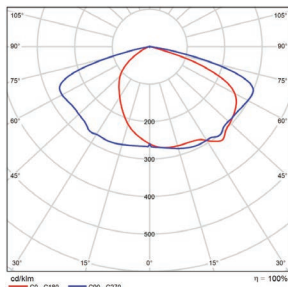

Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	886 fc	6.7 ft	8.3 ft
5.0R	222 fc	13.3 ft	16.5 ft
7.5R	98.4 fc	20.0 ft	24.8 ft
10.0R	55.4 fc	26.7 ft	33.0 ft
12.5R	35.4 fc	33.4 ft	41.3 ft
15.0R	24.6 fc	40.0 ft	49.5 ft

■ Vert. Spread: 106.3°  
■ Horiz. Spread: 117.6°

150 Watt - Type 5  
DLC Premium

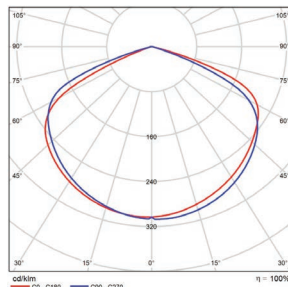


Illuminance at a Distance			
Center Beam fc	Beam Width		
2.5R	1,000 fc	11.2 ft	11.3 ft
5.0R	250 fc	22.4 ft	22.7 ft
7.5R	111 fc	33.6 ft	34.0 ft
10.0R	62.5 fc	44.8 ft	45.3 ft
12.5R	40.0 fc	56.0 ft	56.6 ft
15.0R	27.8 fc	67.1 ft	68.0 ft

■ Vert. Spread: 131.9°  
■ Horiz. Spread: 132.4°

PHOTOMETRICS CHART


**240 Watt - Type 3**  
DLC Premium

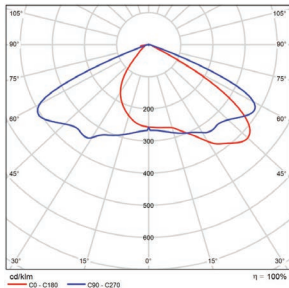

	Center Beam fc	Beam Width	
2.5R	1,407 fc	4.2 ft	8.3 ft
5.0R	352 fc	8.3 ft	16.7 ft
7.5R	156 fc	12.5 ft	25.0 ft
10.0R	87.9 fc	16.6 ft	33.3 ft
12.5R	56.3 fc	20.8 ft	41.7 ft
15.0R	39.1 fc	24.9 ft	50.0 ft

Vert. Spread: 79.4°  
Horiz. Spread: 118.1°


**240 Watt - Type 4**  
DLC Premium

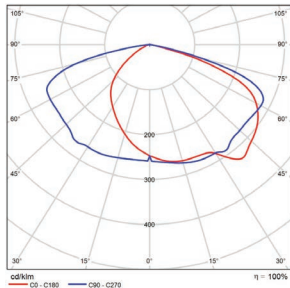

	Center Beam fc	Beam Width	
2.5R	1,340 fc	6.2 ft	8.9 ft
5.0R	335 fc	12.3 ft	17.9 ft
7.5R	149 fc	18.5 ft	26.8 ft
10.0R	83.7 fc	24.7 ft	35.7 ft
12.5R	53.6 fc	30.9 ft	44.6 ft
15.0R	37.2 fc	37.0 ft	53.6 ft

Vert. Spread: 102.0°  
Horiz. Spread: 121.5°


**240 Watt - Type 5**  
DLC Premium

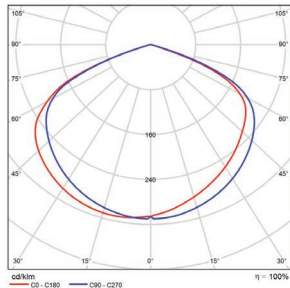

	Center Beam fc	Beam Width	
2.5R	1,688 fc	10.9 ft	10.9 ft
5.0R	422 fc	21.9 ft	21.8 ft
7.5R	188 fc	32.8 ft	32.7 ft
10.0R	106 fc	43.8 ft	43.5 ft
12.5R	67.5 fc	54.7 ft	54.4 ft
15.0R	46.9 fc	65.7 ft	65.3 ft

Vert. Spread: 130.9°  
Horiz. Spread: 130.7°


**320 Watt - Type 3**  
DLC Premium

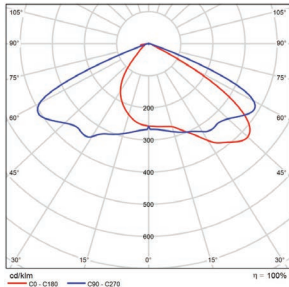

	Center Beam fc	Beam Width	
2.5R	1,864 fc	4.2 ft	8.3 ft
5.0R	466 fc	8.3 ft	16.7 ft
7.5R	207 fc	12.5 ft	25.0 ft
10.0R	116 fc	16.6 ft	33.3 ft
12.5R	74.5 fc	20.8 ft	41.7 ft
15.0R	51.8 fc	24.9 ft	50.0 ft

Vert. Spread: 79.4°  
Horiz. Spread: 118.1°


**320 Watt - Type 4**  
DLC Premium

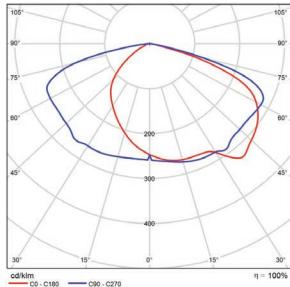

	Center Beam fc	Beam Width	
2.5R	1,775 fc	6.2 ft	8.9 ft
5.0R	444 fc	12.3 ft	17.9 ft
7.5R	197 fc	18.5 ft	26.8 ft
10.0R	111 fc	24.7 ft	35.7 ft
12.5R	71.0 fc	30.9 ft	44.6 ft
15.0R	49.3 fc	37.0 ft	53.6 ft

Vert. Spread: 102.0°  
Horiz. Spread: 121.5°

**320 Watt - Type 5**  
DLC Premium

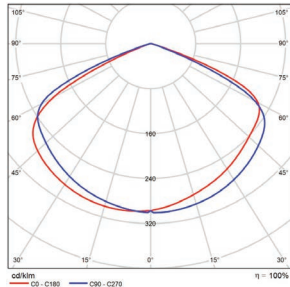

	Center Beam fc	Beam Width	
2.5R	2,092 fc	10.7 ft	10.8 ft
5.0R	523 fc	21.4 ft	21.6 ft
7.5R	232 fc	32.1 ft	32.5 ft
10.0R	131 fc	42.7 ft	43.3 ft
12.5R	83.7 fc	53.4 ft	54.1 ft
15.0R	58.1 fc	64.1 ft	64.9 ft

Vert. Spread: 129.9°  
Horiz. Spread: 130.4°

PACKAGE

Case Qty 1 pc

