

Version	1.0	Date	10/1/2022
Prepared By	J.C		

**PRODUCT SPECIFICATION**

Category	Flood Light
Item Number	9654
Stock Code	FXFDL60SW/77/CCT3/BZ-YK
Mounting	Yoke
Housing Color	Bronze



**ELECTRICAL CHARACTERISTICS**

Rated Wattage (W)	60/50/40	Replacement Wattage (W)	150-250
Tested Wattage (W)	59.9/48.1/39.5		
Input Voltage (V)	120 ~277	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.55	AUX (12V) Line	-
Power Factor	≥ 0.9		
THD	≤ 20%		

**PHOTOMETRIC CHARACTERISTICS**

Lumen (lm)	8100/6750/5400	CCT (K)	3000/4000/5000K
Efficacy (lm/w)	135	Beam Angle (°)	NEMA 7Hx7V
CRI	70		

**GENERAL CHARACTERISTICS**


Operating Temperature (°F)	-40 ~ 113
Storage Temperature (°F)	-40 ~ 158
IP Rating	IP65
Rated Life	50000 hrs.
Warranty	5 years

**ACCESSORIES**

Item #	Stock Code	Description
P10012	MT-FDL/KNC/BZ	Mount-FDL Knuckle Bronze

**PRODUCT DIMENSIONS**

Width- in (mm)	7.87	200
Height- in (mm)	6.81	173
Depth- in (mm)	1.65	42
EPA (ft²)	-	
Weight (lbs)	2.43	
Mounting Height (ft)	-	
Cable Length (ft)	-	

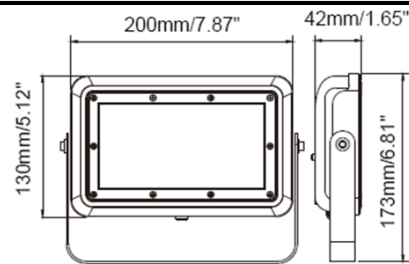

**CERTIFICATIONS**

UL/ETL	cULus	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	V5.1 Premium	RoHs	✓

**DOCUMENTS**

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

--