SATCO | NUVO

LED ADJUSTABLE WALL PACKS

FIELD SELECTABLE





TWO FIELD SELECTABLE MODELS: WATTAGE AND CCT

90° ADJUSTABLE HEAD

RANGE VOLTAGE 120V-277V

INTEGRATED BYPASSABLE PHOTOCELL

SUGGESTED APPLICATIONS

Walkways
Warehouses
Office Buildings
Schools
Hospitalitys

Engineered for directional performance and on-site flexibility, these LED Adjustable Wall Packs deliver targeted outdoor illumination with precision control. Offered in small and large configurations, each fixture features its own dedicated wattage package and is field selectable—allowing you to choose from three wattages and three color temperatures at installation to match your exact project requirements.The adjustable head rotates up to 90°, directing light exactly where it's needed for enhanced coverage and improved visibility. A built-in, bypassable photocell enables convenient dusk-to-dawn operation, while select dimmer compatibility supports additional energy management and customization. Constructed from durable die-cast aluminum with a corrosion-resistant bronze finish and an impact-resistant polycarbonate lens, these fixtures are built for long-term reliability in demanding environments.

120-277V | 0-10V DIMMING | WET LOCATION | IP 65 | IK 08 | 50,000 HOURS | 5 YEAR WARRANTY | TRUSTED NB WARRANTY

LED ADJUSTABLE WALL PACKS
FIELD SELECTABLE

GENERAL SPECIFICATIONS

Input Voltage: 120V-277V
Frequency: 50/60Hz
Power Factor: >0.9
Beam Spread: 65°x95°
Dimmable: 0-10V Dimmable Down to 20%
Surge Protection Rating: 4kV
Integrated Photocell: Bypassable
Efficacy: up to 162 LPW
CRI: 80+
CCT Selectable: 3000K/4000K/5000K

Location Rating: Wet
IP Rating: IP65
IK Rating: IK08
Ambient Operating Temperature: -40°C (-40°F) to +40°C (+104°F)
Mounting Options: Wall
Construction: Die-Cast Aluminum
Finish: Bronze
Lens: Impact Resistant Polycarbonate
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Max Lumens	Wattage Selectable	HID Replacement Wattage	Input Current @120V/277V	THD%	DLC ID
65-943	3669	25W/20W/15W	70W-100W	0.13-0.05/0.17-0.07/0.21-0.09A	9.70%	S-3RBQDR
65-944	11264	80W/60W/45W	100W-250W	0.38-0.16/0.50-0.22/0.67-0.29A	9.81%	S-BZVW67

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Extends (C)	Weight
65-943	6.50"	3.84"	8.08"	3.31 Lbs.
65-944	8.50"	4.41"	11.04"	4.96 Lbs.

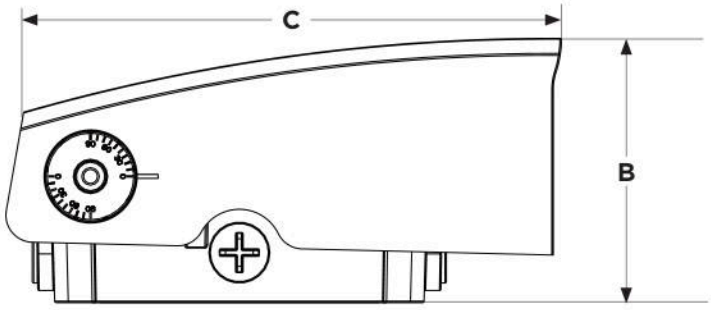

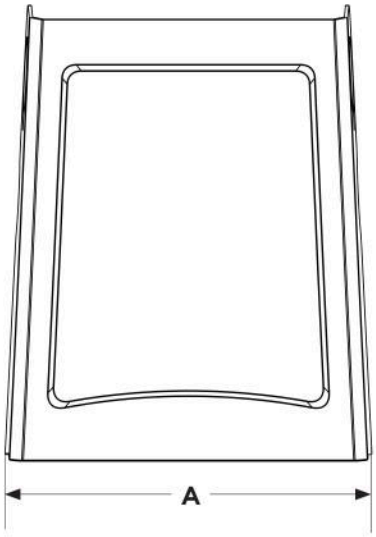

FEATURES

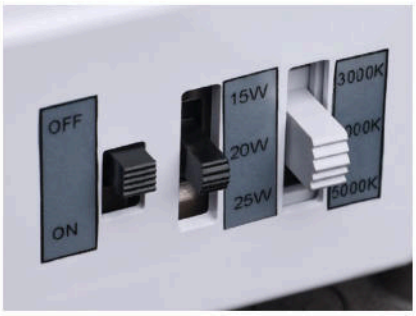

CCT Selectable Switch
Wattage Selectable Switch
Photocell On/Off Switch



Integrated Bypassable Photocell



90° Adjustable Head

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 Class A Commercial applications.

See satco.com for a list of compatible dimmers.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. 04/26 SN1957