SATCO|NUVO

# LED EXIT AND EMERGENCY LIGHT COMBO

## CHICAGO APPROVED









- **RED LETTERS ON WHITE BACKGROUND**
- **CEILING, WALL OR SIDE MOUNTING**
- **STEEL HOUSING CONSTRUCTION**
- **90-MINUTE BATTERY BACKUP RUNTIME**
- **TEST SWITCH AND AC SUPPLY INDICATOR**

**SUGGESTED APPLICATIONS**
Commercial & Industrial, Garages, Retail, Schools, Hospitals

SATCO|NUVO's Chicago Approved LED Exit & Emergency Light Combo Fixtures provide dependable emergency egress illumination in one space-saving solution. A premium frosted glass face with bold red 6-inch EXIT lettering is paired with durable steel construction and two adjustable LED emergency light heads to help direct light where it is needed most. Universal wall, ceiling, and end mounting options simplify installation, while the integrated emergency battery backup, push-to-test button, and AC power indicator provide reliable operation during power outages. These fixtures are UL 924 certified, damp location rated, and designed to meet Chicago code requirements. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of installation requirements.

RED LETTERING | 120-277V | DAMP LOCATION | 90 MIN RUNTIME | 2 YEAR WARRANTY

# LED EXIT AND EMERGENCY LIGHT COMBO
CHICAGO APPROVED

## GENERAL SPECIFICATIONS

**Input Voltage:** 120-277V
**Frequency:** 50/60Hz
**Power Factor:** >0.4
**THD:** <130%
**Emergency Backup:** Yes
**Emergency Duration / Run Time:** 90 Minutes
**Recharge Time:** 24 Hours
**Battery Push to Test Button:** Yes
**Battery Type:** LiFePO4
**Letter Height:** 6"


**Letter Color:** Red
**Face Type:** Single
**Directional Arrow:** Directional Panel Kits sold separately
**Housing Construction / Finish:** Steel / Gloss White
**Lens Material / Finish:** Glass / Frosted
**Mounting Options:** Universal
**Location Rating:** Damp
**Ambient Operating Temperature:** +41°F to +113°F (+5°C to +45°C)
**Warranty:** 2 Year

## ITEM SPECIFICATIONS / ORDER INFO

| Item | Product Code | Wattage | CCT | Input Current @120/277V | Lumens | Number of Lamp Heads | Remote Capable |
|---|---|---|---|---|---|---|---|
| 67-310 | EXC/WH/U/BB/CH | 6.5W | 5700K | 0.05-0.02A | 810L | 2 | No |
| 67-311 | EXC/WH/U/BB/RC/CH | 6.5W | 5700K | 0.05-0.02A | 810L | 2 | Yes |

## DIMENSIONS / WEIGHTS

| Item | Width (A) | Height (B) | Depth (C) | Weight |
|---|---|---|---|---|
| 67-310 | 12.09" | 13.29" | 2.86" | 7.28 Lbs. |
| 67-311 | 12.09" | 13.29" | 2.86" | 7.28 Lbs. |

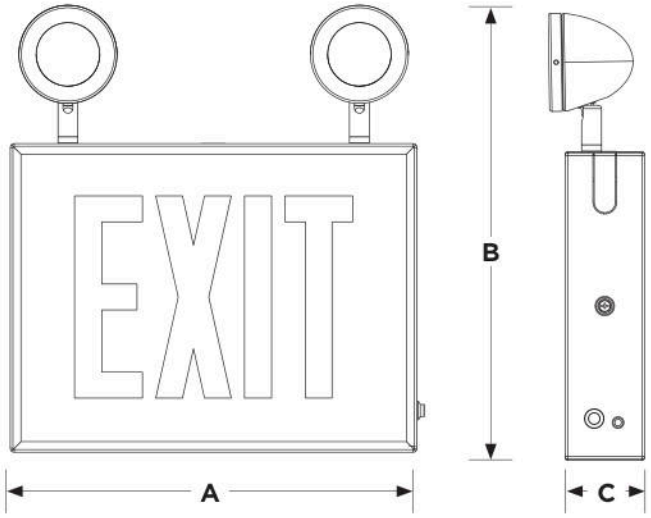


## NOMENCLATURE

EX/WH/U/XX/XX/CH
1 2 3 4 5 6

1-Product Family (EXC=Exit Sign/Emergency Light Combo)
2-Housing Color (WH = White)
3-Input Voltage (U=120-277V)
4-Battery Backup
5-Remote Capable (Blank=No support, RC=Remote Capable)
6-City of Code (CH=Chicago)

## FEATURES



Red Lettering
Single Face



Test Switch & Power
Supply Indicator



Ceiling Wall or Side
Mount Capable


Two Adjustable LED
Light Heads


© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104

## OPTIONAL ACCESSORIES

| Item | Faceplate Accessories (Compatible with 67-310 & 67-311) | |
|---|---|---|
| 67-320 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; No Arrows |  |
| 67-321 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Right Direction Arrow |  |
| 67-322 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Left Direction Arrow |  |
| 67-323 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Double Direction Arrow |  |
| 67-324 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; No Arrows |  |
| 67-325 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Right Direction Arrow |  |
| 67-326 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Left Direction Arrow |  |
| 67-327 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Double Direction Arrow |  |
| 67-330 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; No Arrows |  |
| 67-331 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; One Panel Has Right Direction Arrow; The Other Panel Has A Left Direction Arrow |  |
| 67-332 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; Double Direction Arrows |  |
| 67-333 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; No Arrows |  |
| 67-334 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; One Panel Has Right Direction Arrow; The Other Panel Has a Left Direction Arrow |  |
| 67-335 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; Double Direction Arrows |  |
| **Item** | **Remote Light Head Accessories** (Compatible with 67-311) | |
| 67-395 | Remote Emergency Light; Chicago Approved; White Housing; Single Head; 6 Vdc 1.5 W |  |
| 67-396 | Remote Emergency Light; Chicago Approved; White Housing; Dual Head; 6 Vdc 3.0 W |  |


© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104

## MOUNTING ACCESSORIES

| Item | Pendant Mounting Accessories (Compatible with 67-310 & 67-311) | Size | Length | Finish | |
|---|---|---|---|---|---|
| 67-900 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | White |  |
| 67-901 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | Black | |
| 67-902 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | Silver | |
| 67-910 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | White |  |
| 67-911 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | Black | |
| 67-912 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | Silver | |
| 67-915 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | White |  |
| 67-916 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | Black | |
| 67-917 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | Silver | |

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 Class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.



© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104