SATCO | NUVO

LED 8′ T8 LAMP

FIELD SELECTABLE | BALLAST BYPASS

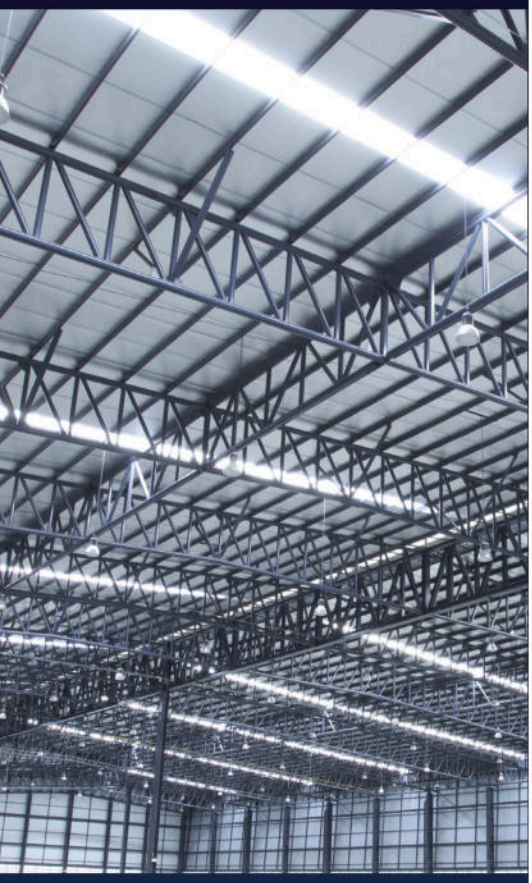





- **FIELD SELECTABLE: 3 WATTAGE AND 5 CCT**
- **DLC LISTED WHEN USED IN FA8 APPLICATIONS**
- **OPTIONAL R17D BASE CAPS INCLUDED**
- **INCLUDES C-CLIP FOR EXTRA LAMP SUPPORT**
- **PET COATED GLASS TUBE**
- **COMPATIBLE WITH OPTIONAL 10W EMERGENCY DRIVER**

SUGGESTED APPLICATIONS
Warehouses, Box Stores
Grocery Stores, Gymnasiums

SATCO|NUVO's T8 8' ballast bypass lamp is field selectable, offering three wattage options and five CCT options in one convenient unit. Built for use in Fa8 lamp holders, it also comes with R17d adapter caps, making it versatile for use in a variety of shunted and non-shunted lamp holders. Suitable for virtually any open or enclosed fixture, these lamps are PET coated, NSF rated and rated for use in damp locations.

DLC LISTED · DAMP LOCATION · NSF · 50,000 HOURS · 5 YEAR WARRANTY · TRUSTED WARRANTY

SATCO | NUVO

LED 8′ T8 LAMP
FIELD SELECTABLE | BALLAST BYPASS

GENERAL SPECIFICATIONS

Range Voltage, Frequency: 120V-277V, 50/60Hz
Power Factor, THD%: 0.9, <25%
CRI: 80+
Efficacy: Up to 145 LPW
Beam Angle: 210°

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Location Rating: Damp
Enclosed Fixture Rating: Suitable for open and enclosed fixtures
Minimum Compartment Size: 97" x 11" x 3"
Construction: PET Coated Glass
Wiring: Double-Ended
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Wattage	Fluorescent Replacement Wattage	CCT	Lumens	DLC ID	Pack QTY
S11758	24W/32W/40W	59W/86W/96W	3000K/3500K/4000K/5000K/6500K	3500/4400/5500	S-3Y6HM9	1/10

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Weight
S11758	93.88"	1.00"	0.88 Lbs.

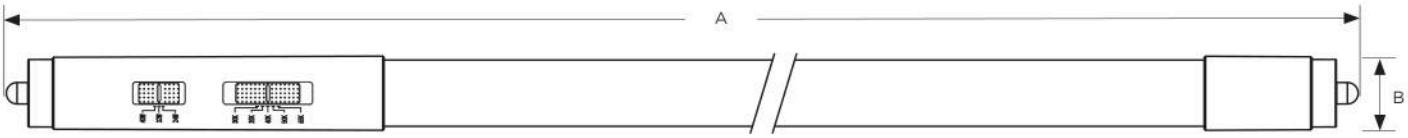

ACCESSORIES (SOLD SEPARATELY)

Item	Description	
S8002	10W Emergency Driver	

FEATURES



Field Selectable:
3 Wattages and 5 CCT



Easily swap Fa8 caps for R17d for applications that require double contact bases



C-Clip attaches to fixture with self-tapping screw for additional lamp support

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

DLC Primary Use: Internal Driver/Line Voltage (UL Type B) Lamps.
DLC Listed only when used in Fa8 applications.
Replacement wattage shown depends on application and fixture.
Specifications are subject to change without prior notice.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. Rev 08/25 SN1894