SATCO® | NUVO®

LED T8 LAMPS
FA8 AND R17D BASE
CCT SELECTABLE



3-CCT SELECTABLE 4′, 6′ AND 8′ T8 BALLAST BYPASS LAMPS



Features:
- Direct replacement for fluorescent T8 or 12 lamps
- Ballast bypass - UL Type B installation
- NSF Certified - P.E.T. coated, shatter resistant glass tube
- Compatible with S8002 Emergency Driver
- 5 year warranty

Applications include:
- Commercial
- Hospitality
- Offices
- Retail
- Warehouses

Satco|Nuvo's LED T8 Lamps with Fa8 or R17d bases are one of our most versatile lamps. Featuring ColorQuick Selectable Color Technology, these lamps allow for easy selection of 4000K/5000K/6500K color temperatures at installation The P.E.T. coated lamp provides shatterproof protection to ensure safe illumination anywhere, including food service applications.

DAMP LOCATION · CLASSIFIED c UL us · RECOGNIZED COMPONENT ETL Intertek 4005203 CONFORMS TO NSF STD.2 · c RU us · DLC LISTED

© Satco Product, Inc.
All rights reserved 5/23 SA2954

LED T8 LAMPS
FA8 AND R17D BASE
CCT SELECTABLE

GENERAL SPECIFICATIONS:

Input Voltage, Frequency:	120-277V, 50/60Hz
Power Factor, THD %:	0.9, < 25%
Efficacy:	Up to 145 LPW
CRI:	83
Functional Life (L70):	50,000 hours
Ballast Bypass/Compatible:	UL Type B
Location Rating:	Damp
Ambient Operating Temperature:	-20°C (-4°F) to +45°C (+113°F)
Enclosed Fixture Rating:	Rated for enclosed fixtures
Construction:	P.E.T. coated frosted glass

WIRING DIAGRAM

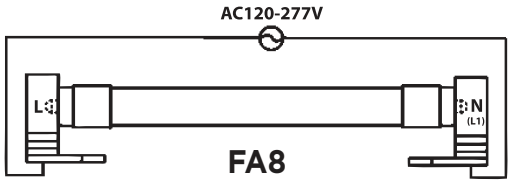

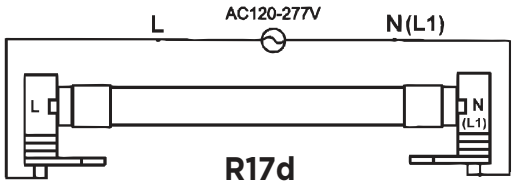

ITEM SPECIFICATIONS / ORDERING INFO:

Item	Description	UPC	Lumens	Watt-age	Input Current @120V/277V	CCT	Nominal Length	Beam Angle	DLC ID	Pack Quantity
FA8 Base										
S11750	14T8/LED/48-CCT/BP/FA8	045923117503	1950/2000/1900	14W	0.117-0.051A	4000/5000/6500K	4'	180°	--	10
S11751	24T8/LED/72-CCT/BP/FA8	045923117510	3300/3400/3200	24W	0.200-0.087A	4000/5000/6500K	6'	180°	--	10
S11752	38T8/LED/96-CCT/BP/FA8	045923117527	5400/5500/5300	38W	0.317-0.137A	4000/5000/6500K	8'	180°	S-QP7NDI	10
R17 Base										
S11753	18T8/LED/48-CCT/BP/R17D	045923117534	2500/2600/2400	18W	0.150-0.065A	4000/5000/6500K	4'	180°	--	10
S11754	30T8/LED/72-CCT/BP/R17D	045923117541	4200/4300/4100	30W	0.250-0.108A	4000/5000/6500K	6'	180°	--	10
S11755	38T8/LED/96-CCT/BP/R17D	04592397558	5400/5500/5300	38W	0.317-0.137A	4000/5000/6500K	8'	180°	--	10

DLC Primary Use: Internal Driver/Line Voltage (UL Type B) Lamps

© Satco Product, Inc.
All rights reserved 5/23 SA2954