SATCO | NUVO



LED PIN BASED LAMPS

120V HALOGEN REPLACEMENTS



G8 Clear



GY6.35 Clear



G9 Frost



Selected item available carded or retail box

HALOGEN REPLACEMENT LAMPS

FROSTED AND CLEAR OPTIONS

300° OMNI-DIRECTIONAL LIGHT

2700K, 3000K, 4000K, OR 5000K

DURABLE COMMERCIAL DESIGN

SUGGESTED APPLICATIONS

Indoor Residential
Commercial Lighting
Accent Lighting
Decorative Wall Lighting
Workspaces
Pendant Lighting

Transform your surroundings with SATCO|NUVO's selection of GY6.35, G8, and G9 Halogen replacement lamps, engineered for optimal energy efficiency and affordability. Offering a range of shapes, bases, CCT's, and finishes, these lamps utilize cutting-edge LED technology for substantial long-term savings. Emitting a 300-degree omni-directional light, these lamps are ideal for accentuating various settings including chandeliers, display lighting, landscapes, and displays. Explore our diverse selection to find the perfect lighting solution to deliver brilliantly focused light, tailored to meet your requirements.

DAMP LOCATION | 120 VOLT | ENCLOSED FIXTURE | 25,000 HOURS | 3 YEAR WARRANTY | TRUSTED NLB WARRANTY

SATCO | NUVO

LED PIN BASED LAMPS
120V HALOGEN REPLACEMENTS

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 60Hz
Power Factor, THD%: 0.9, 70%
Beam Angle: 300°
CRI: 80

Functional Life: 25,000 Hours
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Enclosed Fixture Rating: Yes

ITEM SPECIFICATIONS / ORDER INFO

Item	Wattage	Lamp Base	CCT	Lamp Finish	Halogen Replacement Wattage	Lumens	Dimmable	Input Current	Efficacy	Lamp Material	Package Type
T4 - G9 Base											
S12328	2W	G9	3000K	Clear	15W	200	Yes	0.02A	100 LPW	Ceramic / Glass	Box
S12329	2W	G9	5000K	Clear	15W	200	Yes	0.02A	100 LPW	Ceramic / Glass	Box
S12330	2W	G9	3000K	Frost	15W	180	Yes	0.02A	90 LPW	Ceramic / Glass	Box
S12128	3.5W	G9	3000K	Clear	25W	330	Yes	0.04A	94 LPW	Ceramic / Glass	Carded
S12129	3.5W	G9	5000K	Clear	25W	330	Yes	0.04A	94 LPW	Ceramic / Glass	Carded
S11230	3.5W	G9	3000K	Clear	35W	330	No	0.03A	94 LPW	Ceramic / Polycarbonate	Box
S11231	3.5W	G9	4000K	Clear	35W	330	No	0.03A	94 LPW	Ceramic / Polycarbonate	Box
S11232	3.5W	G9	3000K	Frost	35W	300	No	0.03A	85 LPW	Ceramic / Polycarbonate	Box
S11233	3.5W	G9	4000K	Frost	35W	300	No	0.03A	85 LPW	Ceramic / Polycarbonate	Box
S12130	5W	G9	3000K	Clear	40W	550	Yes	0.04A	110 LPW	Ceramic / Polycarbonate	Carded
S12131	5W	G9	5000K	Clear	40W	550	Yes	0.04A	110 LPW	Ceramic / Polycarbonate	Carded
S11234	5W	G9	3000K	Clear	40W	550	Yes	0.04A	110 LPW	Ceramic / Polycarbonate	Box
S11235	5W	G9	4000K	Clear	40W	550	Yes	0.04A	110 LPW	Ceramic / Polycarbonate	Box
S11236	5W	G9	3000K	Frost	40W	500	Yes	0.04A	100 LPW	Ceramic / Polycarbonate	Box
S11237	5W	G9	4000K	Frost	40W	500	Yes	0.04A	100 LPW	Ceramic / Polycarbonate	Box
S11238	5W	G9	2700K	Clear	40W	500	Yes	0.04A	100 LPW	Ceramic / Polycarbonate	Box
S11239	5W	G9	5000K	Clear	40W	550	Yes	0.04A	110 LPW	Ceramic / Polycarbonate	Box
T6 - G9 Base											
S12331	6.5W	G9	3000K	Clear	50W	650	Yes	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12332	6.5W	G9	5000K	Clear	50W	650	Yes	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12333	6.5W	G9	3000K	Frost	50W	600	Yes	0.06A	92 LPW	Ceramic / Polycarbonate	Box
T6 - GY6.35 Base											
S12322*	4.5W	GY6.35	3000K	Clear	35W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Box
S12323*	4.5W	GY6.35	5000K	Clear	35W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Box
T6 - G8 Base											
S12324	4.5W	G8	3000K	Clear	35W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Box
S12325	4.5W	G8	5000K	Clear	35W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Box
S12126	4.5W	G8	3000K	Clear	40W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Carded
S12127	4.5W	G8	5000K	Clear	40W	430	Yes	0.04A	95 LPW	Ceramic / Polycarbonate	Carded
S12326	6.5W	G8	3000K	Clear	50W	650	Yes	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12327	6.5W	G8	5000K	Clear	50W	650	Yes	0.06A	100 LPW	Ceramic / Polycarbonate	Box

***S12322 and S12323 are cETLus Listed, FCC, RoHS**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lamps may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

© Satco Products, Inc. All rights reserved. 05/24 SA3061

DIMENSIONS/WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S12328	1.77"	0.51"	0.02 Lbs.
S12329	1.77"	0.51"	0.02 Lbs.
S12330	1.77"	0.51"	0.02 Lbs.
S12128	2.17"	0.71"	0.06 Lbs.
S12129	2.17"	0.71"	0.06 Lbs.
S11230	1.97"	0.63"	0.03 Lbs.
S11231	1.97"	0.63"	0.03 Lbs.
S11232	1.97"	0.63"	0.03 Lbs.
S11233	1.97"	0.63"	0.03 Lbs.
S12130	2.13"	0.75"	0.06 Lbs.
S12131	2.13"	0.75"	0.06 Lbs.
S11234	2.13"	0.75"	0.06 Lbs.
S11235	2.13"	0.75"	0.06 Lbs.
S11236	2.13"	0.75"	0.06 Lbs.
S11237	2.13"	0.75"	0.06 Lbs.
S11238	2.13"	0.75"	0.06 Lbs.
S11239	2.13"	0.75"	0.06 Lbs.
S12322	1.77"	0.65"	0.02 Lbs.
S12323	1.77"	0.65"	0.02 Lbs.
S12324	1.75"	0.65"	0.02 Lbs.
S12325	1.75"	0.65"	0.02 Lbs.
S12126	1.75"	0.65"	0.02 Lbs.
S12127	1.75"	0.65"	0.02 Lbs.
S12326	2.52"	0.75"	0.06 Lbs.
S12327	2.52"	0.75"	0.06 Lbs.
S12331	2.76"	0.75"	0.06 Lbs.
S12332	2.76"	0.75"	0.06 Lbs.
S12333	2.76"	0.75"	0.06 Lbs.

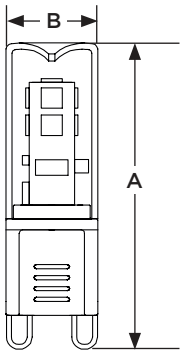

S12328-S12330

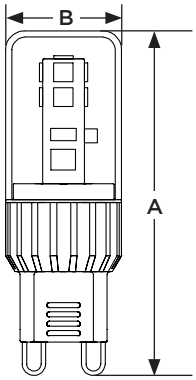

S12128-S12129



S11230-S11233

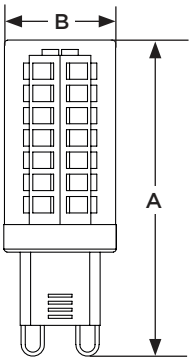

S12130-S12131
S11234-S11239

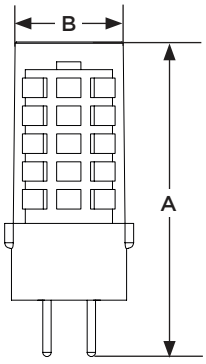

S12322-S12323

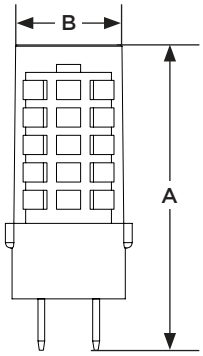

S12126-S12127
S12324-S12325

SCAN BELOW FOR OTHER PIN BASED AND MINIATURE REPLACEMENT CATEGORIES:

12V G4 and GY6.35
SA3059

E11 Mini can and E12
SN1637

Single & Double contact
SN1645

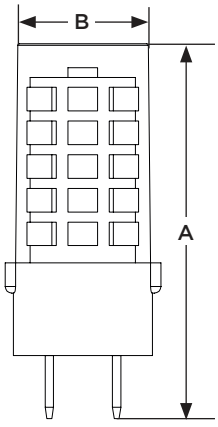

S12326-S12327

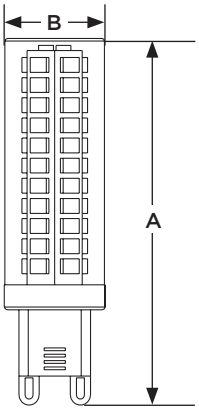

S12331-S12333

© Satco Products, Inc. All rights reserved. 05/24 SA3061