SATCO | NUVO

LED T8 LAMPS

TYPE A | DIRECT REPLACEMENT





TYPE A - DIRECT REPLACEMENT

INTEGRATED THERMAL PROTECTION

SUGGESTED APPLICATIONS

Offices
Medical Facilities
Retail
Warehouses

SATCO|NUVO's Type A LED T8 Lamps are a direct replacement for traditional fluorescent tubes for use in a variety of applications. Dimming capable with compatible ballasts, these lamps allow for a customized lighting experience. High-performing, these lamps are damp location rated for reliable use in humid areas.

DAMP LOCATION | DIMMABLE | ENCLOSED FIXTURE | TYPE A | NSF | 50,000 HOURS | 5 YEAR WARRANTY | TRUSTED NB WARRANTY

SATCO | NUVO

LED T8 LAMPS
TYPE A | DIRECT REPLACEMENT

GENERAL SPECIFICATIONS

Range Voltage, Frequency: Ballast Dependent
Power Factor: 0.9
THD%: 20%
Dimming: Dimmable with when used with select emergency and dimming ballasts
Ballast Compatible: Type A
CRI: 82
Beam Angle: 210°
Location Rating: Damp

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Enclosed Fixture Rating: Yes
Wiring: Double Ended
Base: G13; Medium Bi Pin
Construction: Glass
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Size	Lumens	Wattage	Fluorescent Replacement Wattage	Efficacy	CCT
S11740R1	4′	1740	9.5W	32W/30W/28W/25W	183 LPW	3000K
S11741R1	4′	1740	9.5W	32W/30W/28W/25W	183 LPW	3500K
S11742R1	4′	1740	9.5W	32W/30W/28W/25W	183 LPW	4000K
S11743R1	4′	1740	9.5W	32W/30W/28W/25W	183 LPW	5000K
S49934R1	4′	1800	11W	32W/30W/28W/25W	163 LPW	3000K
S49935R1	4′	1800	11W	32W/30W/28W/25W	163 LPW	3500K
S49936R1	4′	1800	11W	32W/30W/28W/25W	163 LPW	4000K
S49937R1	4′	1800	11W	32W/30W/28W/25W	163 LPW	5000K
S49975R1	4′	2200	14W	32W/30W/28W/25W	157 LPW	3000K
S49976R1	4′	2200	14W	32W/30W/28W/25W	157 LPW	3500K
S49977R1	4′	2200	14W	32W/30W/28W/25W	157 LPW	4000K
S49978R1	4′	2200	14W	32W/30W/28W/25W	157 LPW	5000K

DIMENSIONS/WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S11740R1	47.78″	1.10″	0.39 Lbs.
S11741R1	47.78″	1.10″	0.39 Lbs.
S11742R1	47.78″	1.10″	0.39 Lbs.
S11743R1	47.78″	1.10″	0.39 Lbs.
S49934R1	47.78″	1.10″	0.39 Lbs.
S49935R1	47.78″	1.10″	0.39 Lbs.
S49936R1	47.78″	1.10″	0.39 Lbs.
S49937R1	47.78″	1.10″	0.39 Lbs.
S49975R1	47.78″	1.10″	0.39 Lbs.
S49976R1	47.78″	1.10″	0.39 Lbs.
S49977R1	47.78″	1.10″	0.39 Lbs.
S49978R1	47.78″	1.10″	0.39 Lbs.

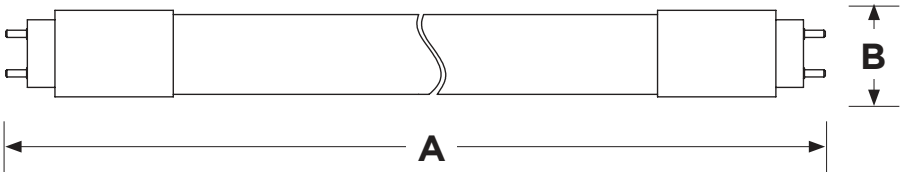

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
May not be compatible with all dimming ballasts. Visit satco.com for details.
Not for use in vapor tight fixtures.
Specifications are subject to change without prior notice.
Replacement wattage shown depends on application and fixture.
Visit satco.com/service/warranty for complete warranty details.

© Satco Products, Inc. All rights reserved. 9/24 SN1711