



PROJECT:
CONTACT:
LOCATION:
TYPE:




PRODUCT DESCRIPTION

Sleek, modern outdoor cylinder mini pendant with a professional look. Encased in top-quality rounded cylindrical frame composed of high-quality aluminum, a corrosion-resistant material. Feel at ease with aluminum's high resilience, lasting quality, and inability to rust like steel. Power-coated hard surface provides phenomenal long-lasting color and exceptional corrosion/scratch resistance. Conveniently suitable for damp locations. Feel confident in your choice of elegant simplicity. Delight in clean, minimal, and solid color design that blends in seamlessly with surroundings and existing décor. Offers remarkable versatility for exterior and interior design. Open/uncovered bottom helps prevent accumulation of dust or pests. Go green and save big. Energy-efficient LED is environmentally friendly and requires substantially less electricity to maintain, passing down cost-cutting savings to you. Integrated LED comes with a 5-year limited warranty.

AVAILABLE FINISHES

BLACK	V9206-5
WHITE	V9206-6
SILVER GRAY	V9206-20
ANTIQUÉ BRONZE	V9206-79

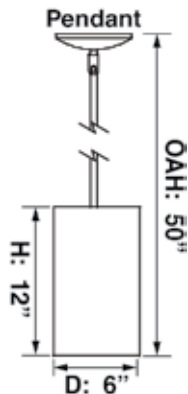

V9206

1-LIGHT INTEGRATED LED INDOOR OR OUTDOOR ALUMINUM MINI CYLINDER DOWNROD PENDANT

SPECIFICATIONS

Type of Lighting	Indoor / Outdoor Hanging Lighting
Product Type	Pendant
Product Subtype	Mini
Overall Height (in)	50
Height (in.)	12
Width (in.)	6
Length or Extension/Projection (in.)	6
Finish	Powder Coated
Main Material	Formed & Welded All Aluminum
Light Direction	Down
Installation/Mounting Position	Downward
Downrod Stems Included?	Yes
Downrod Model #	0090
Downrod Quantity	3
Downrod Size (in.)	12
Sloped Ceiling Swivel Included?	Yes (Up to 90 Degrees)
Electrical Wire Length (ft.)	8
Installation Location	Damp
Light #	1
Watts per Light (W)	15
Total Wattage (W)	15
Light Source Included?	Yes (Integrated LED)
Light Bulb(s) Included?	N/A (Integrated LED Light Source Included)
CRI	80
Color Temperature	3000K
Lumens per Light	1000
Total Lumens	1000
Output Power Supply	Class II
Power Factor (Pf)	>.9
THD	<20%
Life (Rated) (Hours)	50,000 (Based on LED Testing per LM80-08 and Projected Values from IESNA TM21-11)
Dimmable?	Yes (Flicker-Free TRIAC/ELV 5% (120V AC Only))
Base	N/A (Integrated LED)
Input Voltage (Volts)	120V at 50/60 Hz
Safety Ratings	cULus Listed
Compliances	RoHS Compliant FCC Compliant
Assembly	Assembly Required
Accessory 1 (Sold Separately)	0089 6" Downrod Stem
Accessory 2 (Sold Separately)	0090 12" Downrod Stem
Integrated LED Warranty	5-Year Limited Warranty