

LED MINI WALL PACK

WP10



FEATURES AND SPECIFICATIONS

Construction

- Housing: ADC12 Aluminum Die Casting
- Lens: Polycarbonate
- Easy to install and operate

Electrical

- High efficacy up to 130lm/W
- AC120-277V, 0-10V dimming
- CCT & Wattage Selectable
- Surge Protection: L/N 2KV
- Waterproof: IP65 rated

Applications

- Security lighting, Entryways, Stairwells, Hallways, Outdoor commercial, Outdoor residential

Installation

- Photocell dusk to dawn function available

Warranty

- 5 years warranty


Specs at a Glance	* Nominal Wattage (Switchable)
Configuration	WP10-30W-PCP-3CCT
CCT (K)	3000K/4000K/5000K Tunable
Wattage (W)	30W/20W/15W wattage adjustable
Lumens (lm)	max.3900lm
Efficacy (LPW)	Up to 130lm/w
Size	4FT
CRI	>80
Input Voltage	AC120-277V
Operating Temp	-20°C-45°C
Certifications	ETL&DLC 5.1 Premium
Warranty	5-year limited warranty

LED MINI WALL PACK


Ordering information

Model	Wattage xxxW	PCP	3CCT
WP10 Series	15W 20W 30W	PC= Power & CCT Selectable P=Photocell	3000K/4000K/5000K

Detail

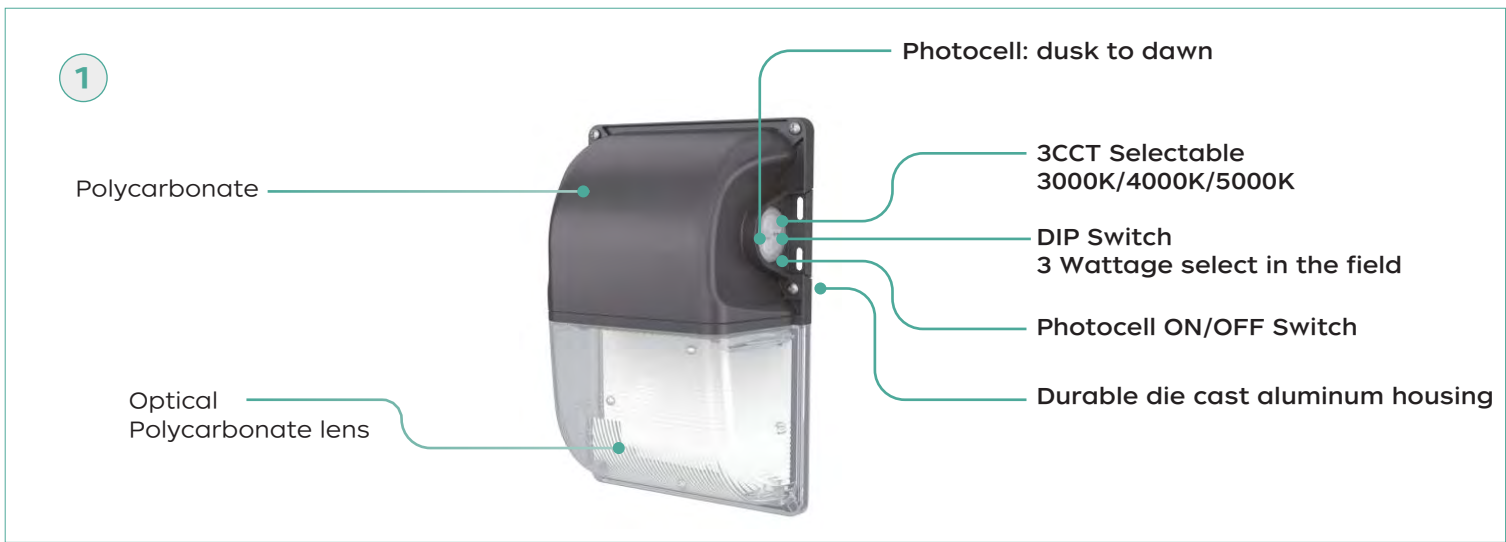


Multiple Emergency Solutions

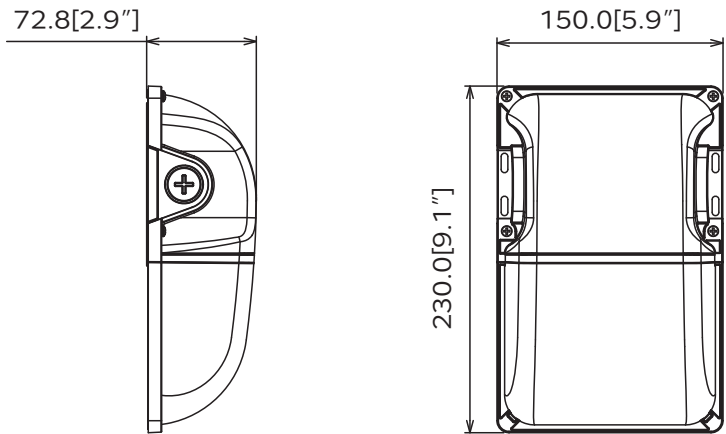

LED MINI WALL PACK



PHOTOMETRICS

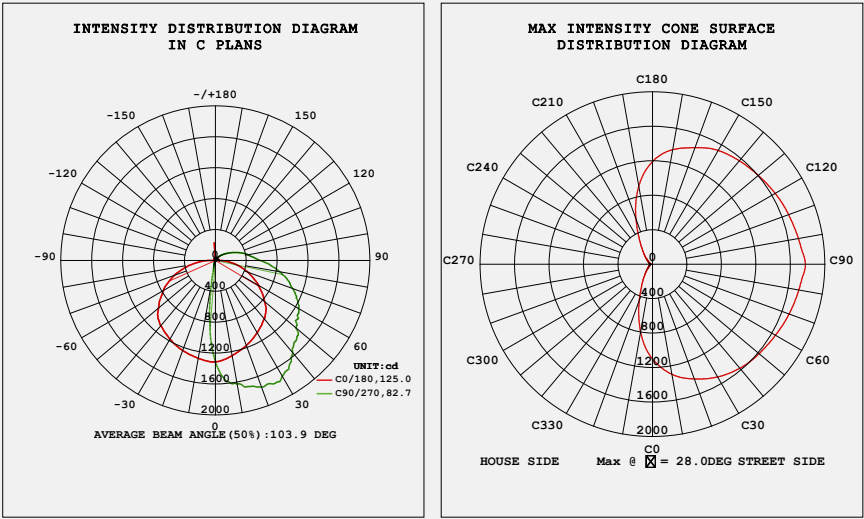

Packing/Weight

Part NO.	Outer Carton Size	Qty/Carton(pcs)	Net weight(lbs)	Gross weight(lbs)
15W/20W/30W	20.1 x 13.8 x11.8inches	12	17.9 lbs	144pcs