



25W

LED Bollard Light



PRODUCT FEATURES:

- Optical design, greatly improved the light utilization and evenness.
- High efficiency LED Driver, voltage AC120-277V.
- Cast Aluminum design, better cooling, light quality, LED Tj < 85 °C .
- Excellent efficacy = 130lm/w.

Additional Information:

- o Power: 25W
- o Input: AC 120-277V
- o CCT : 4000K/5000K
- o Light Source: SM □2835 LEDs
- o Driver: WELED POWER





MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	



PRODUCT APPLICATIONS:

The LED Bollard Lighting Series can be widely used for Outdoor (Wet Location) Excellent for Lawns.Courtyards, Roadways and many other applications.

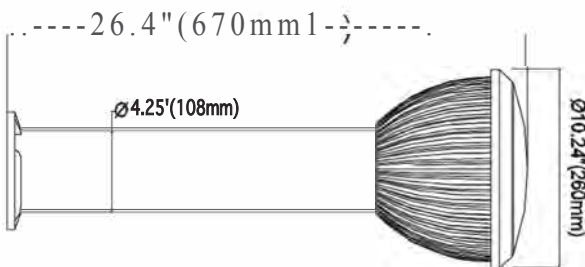

Structure Features:


- o Shell Materials: Aluminum & PC
- o Finish: Dark Bronze/White/black(Optional)
- o Net Weight: 2.76KG (6.DBLBSJ)
- o Product Size: 670mmX260mmX108mm
26.4"X10.24"X4.25"
- o Carton Size: 690mmX270mmX270mm
21.2"x10.6"x10.6"

LED Bollard Light

TECHNICAL PARAMETERS:

Type	WSD-BL25W27-XXK-Z[D, W, B, S1]		
Power	25W	Lighting Angle	141 °
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	0.90	Working Life	>75000 hrs
Driver Efficiency	87%	Working Temperature	-30 - +45 °C
Luminous Flux	3360 lm	Storage Temperature	-40 - +80 °C
Color Temperature	4000K/5000K	Protection Level	Wet Location
CRI	Ra>70	Cable	3core, 1BAWG 0.3ml

PHOTOMETRY:

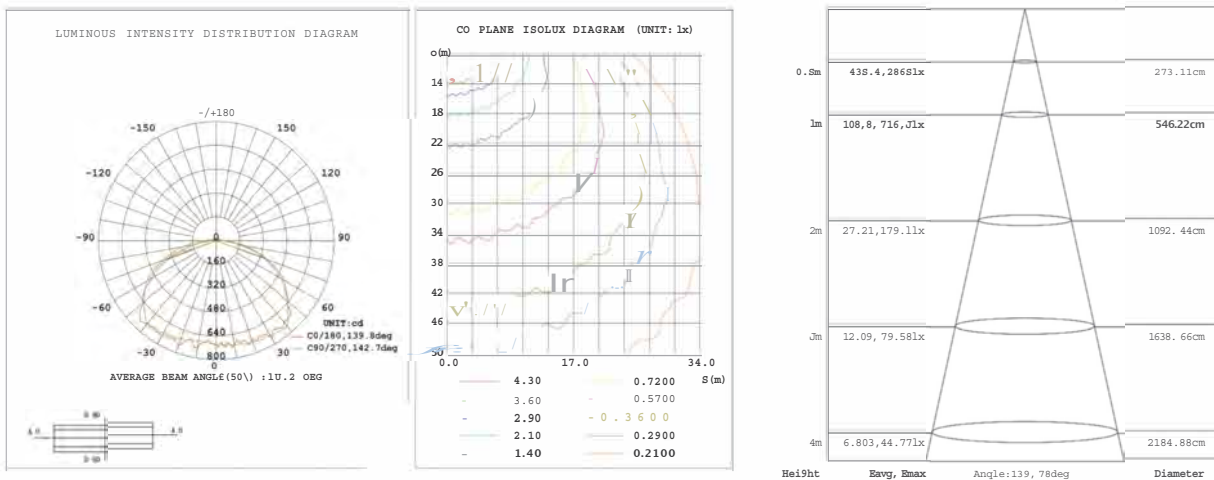

ORDERING EXAMPLE: WSD-BL25W27-HHK-Z [D, W, B, S1]

WSD	BL	25W	27	XXK	Z
Family	Product	Power	Voltage	Color Temp	FINISH
WSD	BL LED Bollard Light	25W	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)