Selectable LED Vapor Tight High Bay Light

WSD LED INC
Green Lighting Resources

Wattages: 155W / 185W / 200W



Selectable LED Vapor Tight High Bay Light provides gasketed enclosure which provides dust-free and moisture-free fixture. LED Vapor Tight High Bay Light Series can be widely used for food processing plants, meat lockers, beverage coolers, car washes, and parking structures.

Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.

UL CERTIFIED · DLC LISTED PREMIUM · IP66 · FIVE YEAR LIMITED WARRANTY

FEATURES

- Made of high quality ABS material, high ignition point, more safe.
- With PC lens and comes with 304 stainless steel fasteners.
- Lampshade-inner surface stripe design make the light diffusion angle greater and the light more uniform.
- 0-10V dimming.
- 12Vdc auxiliary.
- Motion sensor control available (optional)Installation height: Max 12 ft.

WATT/CCT
FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation



SPECIFICATION	
TYPE	WSD-VHB155185200W27-3545K-G2
WATTAGE	155W/185W/200W
LUMEN	24800 lm / 29600 lm / 32000 lm
EFFICACY	≥ 160 lm/W
CCT	3500K/4000K/5000K
CRI	80
INPUT VOLTAGE	AC120-277V
LIGHT ANGLE	115°
POWER FACTOR	0.90
DRIVER EFFICACY	88%
FACTORY SETTINGS	200W & 4000K
WORKING TEMPERATURE	-40°F ~ 104°F
LIFESPAN (L70)	100000 hours
PROTECTION LEVEL	Wet locations / IP66
IK LEVEL	IK10
CABLE	None
WARRANTY	5 year limited

Selectable LED Vapor Tight High Bay Light

WSD LED INC
Green Lighting Resources

Wattages: 155W / 185W / 200W

DIMENSION

Unit: inch(mm)

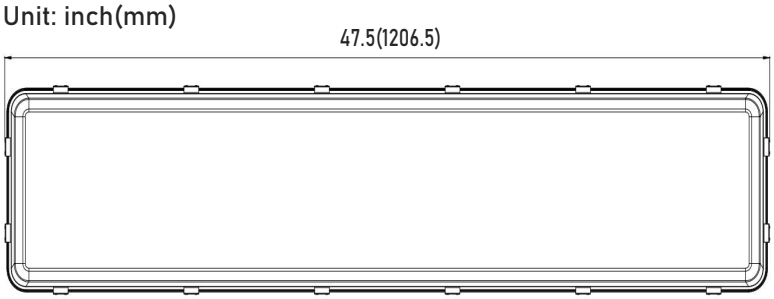



WATTAGE	155W/185W/200W
NET WEIGHT	7.5KG(16.5lbs)
BOX DIM.	

CONTROL (SOLD SEPARATELY)



NLC-MW-SQ-006
Microwave Motion Sensor



RC-100
Microwave Sensor
Remote Controller

INSTALLING ACCESSORIES (STANDARD)



V-HOOK / BRACKET / SCREW /
PLASTIC TUBE / WATERPROOF PLUG

INSTALLING ACCESSORIES (SOLD SEPARATELY)

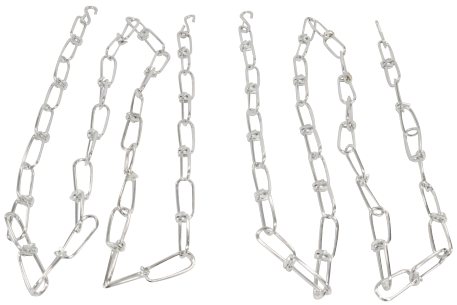

WSD-LHB-CHAIN
LENGTH:(41.34 inch)

ORDERING INFORMATION

EXAMPLE:

WSD-VHB155185200W27-3545K-E[Blank,M]-G2

WSD	VHB	155185200W	27	3545K	E	G2
PRODUCT	PRODUCT	WATTAGE	VOLTAGE	CCT	CONTROL	UPDATE
WSD (WSD LED INC)	**VHB** (Vapor Tight High Bay Light)	**155/185/200W -** (155W/185W/200W)	**27 -** (120-277V)	**3545K -** (3500K/4000K/5000K)	**M -** (Motion Sensor)	Second generation product

Selectable LED Vapor Tight High Bay Light

WSD LED INC
Green Lighting Resources

Wattages: 155W / 185W / 200W

PHOTOMETRICS

For complete IES files, please visit our website.

WSD-VHB155185200W27-3545K-G2 (155W&4000K)

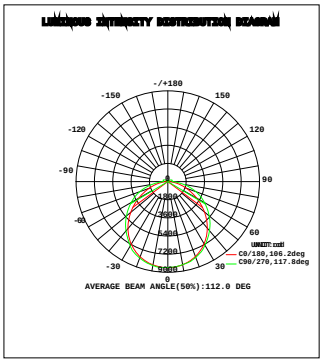

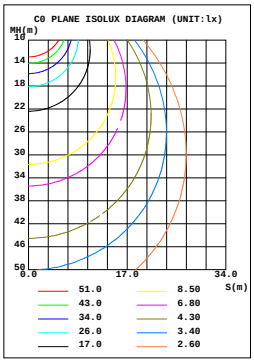

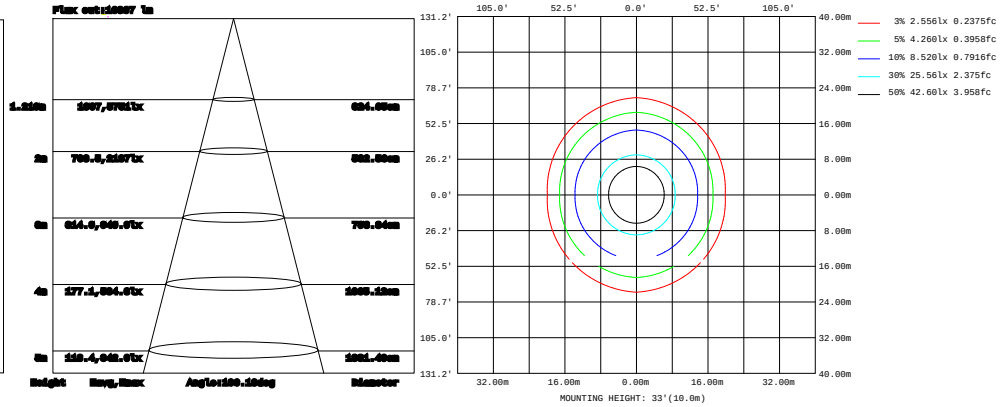

WSD-VHB155185200W27-3545K-G2 (185W&4000K)

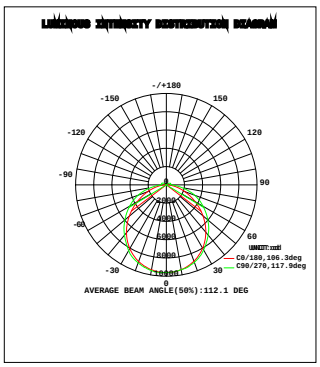

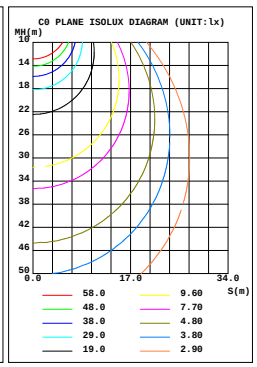

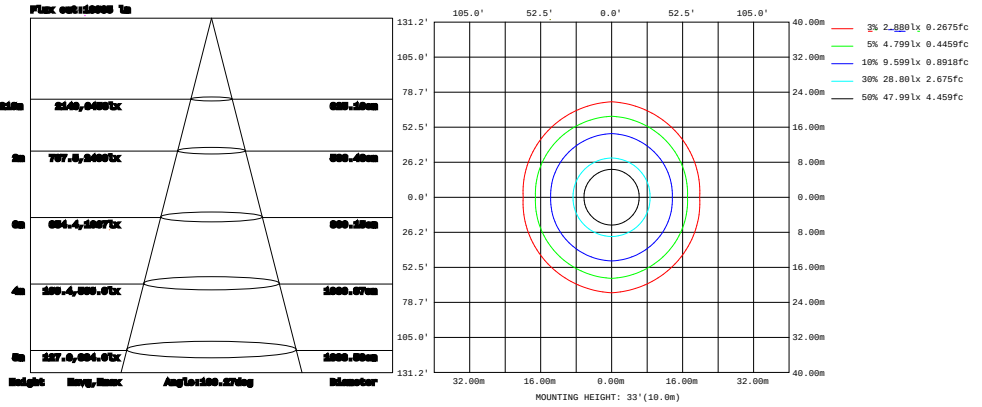

WSD-VHB155185200W27-3545K-G2 (200W&4000K)

