
# LED Selectable Strip Linear Light

WSD LED INC
Green Lighting Resources

**Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W**

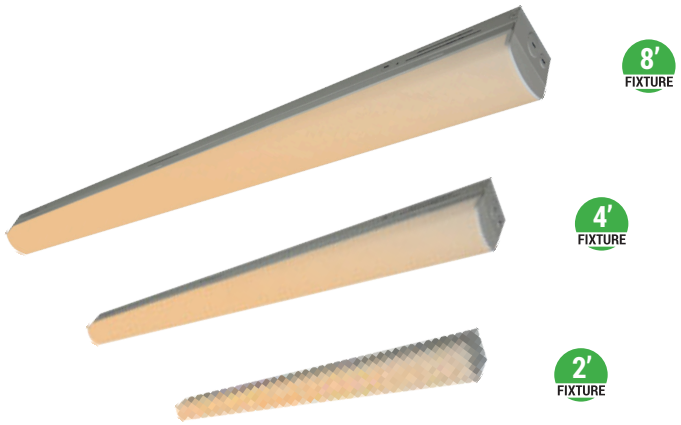


The Selectable Strip Linear Light can be widely used for indoor (damp locations) Excellent for hospitals,schools,shops,restaurants,storage rooms, supermarkets, etc.

UL CERTIFIED E354939 · DLC PREMIUM · 5 YEAR LIMITED WARRANTY · CCT Selectable · POWER Selectable

## FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- Lens made of acrylic material (PMMA).
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

**WATT/CCT**
**FIELD-ADJUSTABLE**

Simply select desired CCT and Wattage before installation






Buckle design,Convenient disassembly and assembly

| SPECIFICATION | | | | |
|---|---|---|---|---|
| TYPE | WSD-ST2FT152025W27-3545K | WSD-ST4FT253040W27-3545K | WSD-ST8FT556065W27-3545K | WSD-ST8FT657591W27-3545K |
| WATTAGE | (2FT) 15W/20W/25W | (4FT) 25W/30W/40W | (8FT) 55W/60W/65W | (8FT) 65W/75W/91W |
| LUMEN | 2285 lm/3077lm/3719lm | 3806 lm/4653lm/6100lm | 8595 lm/9190 lm/9677 lm | 10380 lm/11978 lm/13409 lm |
| EFFICACY | ≥130 lm/W | | | |
| CCT | 3500K/4000K/5000K | | | |
| DEFAULT SETTING | 25W&4000K | 40W&4000K | 65W&4000K | 91W&4000K |
| CRI | 80 | | | |
| INPUT VOLTAGE | AC120-277V | | | |
| LIGHT ANGLE | 112° | | | |
| POWER FACTOR | 0.90 | | | |
| DRIVER EFFICACY | 86% | | | |
| DIMMING | 0-10V Dimming | | | |
| WORKING TEMPERATURE | -4°F ~ 122°F | | | |
| LIFESPAN (L70) | 100,000 hours | | | |
| PROTECTION LEVEL | Damp locations | | | |
| CABLE | NO CABLE | | | |
| WARRANTY | 5 year limited | | | |


# LED Selectable Strip Linear Light

WSD LED INC
Green Lighting Resources

**Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W**

## DIMENSION

Unit:mm/inch

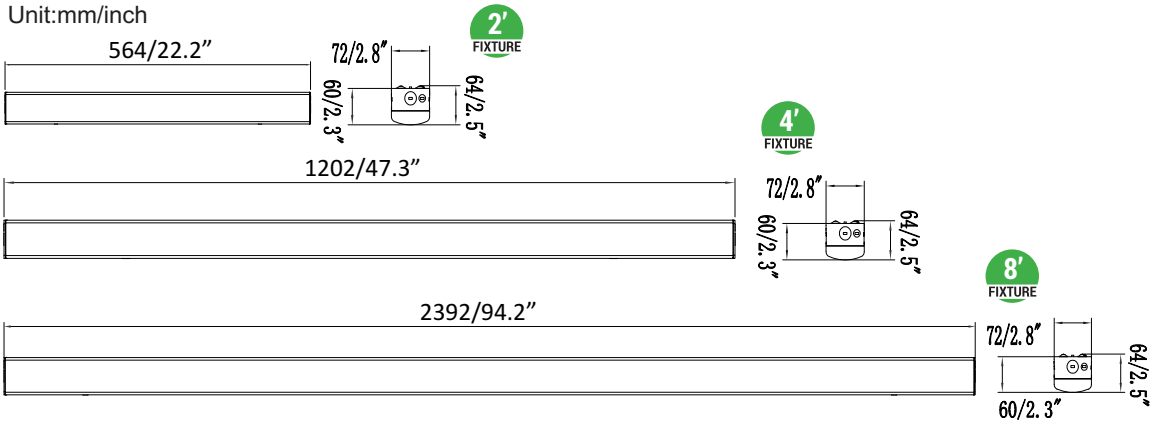


| | |
|---|---|
| **WATTAGE** | 15W/20W/25W |
| **GR. WEIGHT** | 2.65 lbs (6 pcs/carton) |
| **BOX DIM.** | 25.63" x 9.84" x 5.98" |

| | |
|---|---|
| **WATTAGE** | 25W/30W/40W |
| **GR. WEIGHT** | 4.41 lbs (6 pcs/carton) |
| **BOX DIM.** | 50.59" x 9.84" x 5.98" |

| | |
|---|---|
| **WATTAGE** | 55W/60W/65W/75W/91W |
| **GR. WEIGHT** | 8.49 lbs (4 pcs/carton) |
| **BOX DIM.** | 98.03" x 6.89" x 5.91" |

## EMERGENCY BACK-UP (SOLD SEPARATELY)



**WSD-EMS8W27-XX**
8W Emergency Backup Battery
LED Driver

**WSD-EMS15W27-XX**
15W Emergency Backup Battery
LED Driver

**WSD-EMS20W27-XX**
20W Emergency Backup Battery
LED Driver

## CONTROL (SOLD SEPARATELY)



**NLC-MW-SQ-005**
Microwave Motion Sensor



Bluetooth
**NLC-MW-SQ-BLD-GE**
Bluetooth Microwave Sensor
For GEBC Systems



**RC-100**
Microwave Sensor
Remote Controller

## STANDARD ACCESSORIES(Standard)



**1.2M CABLE**
(2FT,4FT,8FT)



**J-BOX COVER**
(2FT,4FT,8FT)




**V-HOOK**
(2FT,4FT,8FT)

## STANDARD ACCESSORIES(Sold Separately)



**WSD-ST-SMA**
Surface Mount Accessories
for Strip lights
(2FT,4FT,8FT)



**WSD-ST-CROSS PIECE**
Strip Light Connection
Piece
(2FT,4FT,8FT)



**WSD-ST-WG-2FT**
**WSD-ST-WG-4FT**
WIRE GUARD
8FT Strip Light :
WSD-ST-WG-4FT(2PCS)

## ORDERING INFORMATION

**EXAMPLE:**

**WSD-ST2FT152025W27-3545K-E[Blank,M] / WSD-ST4FT253040W27-3545K-E[Blank,M] / WSD-ST8FT556065W27-3545K-E[Blank,M]**

| WSD | ST | 2FT | 152025 | 27 | 3545K | E |
|---|---|---|---|---|---|---|
| PRODUCT | PRODUCT | SIZE | WATTAGE | VOLTAGE | CCT | CONTROL |
| **WSD** (WSD LED INC) | **ST** (Strip Linear Light) | **2FT** (2-foot)<br>**4FT** (4-foot)<br>**8FT** (8-foot) | **152025W -** (15W/20W/25W)<br>**253040W -** (25W/30W/40W)<br>**556065W -** (55W/60W/65W)<br>**657591W -** (65W/75W/91W) | **27 -** (120-277V) | **3545K -** (3500K/4000K/5000K) | **M**(Motion Sensor) |

# LED Selectable Strip Linear Light


WSD LED INC
Green Lighting Resources


**Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W**


## PHOTOMETRICS


*For complete IES files, please visit our website.*

### WSD-ST4FT253040W27-3545K (40W&3500K)

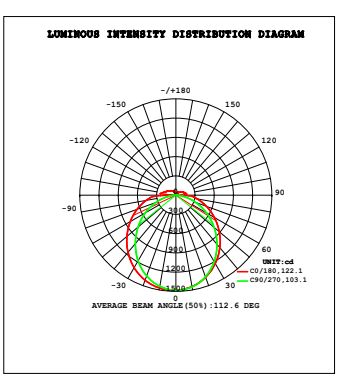


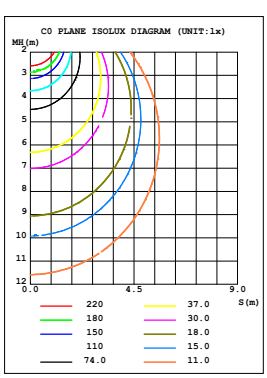


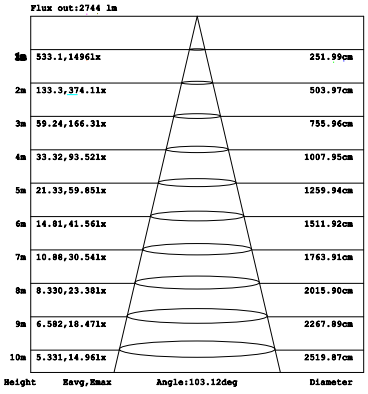
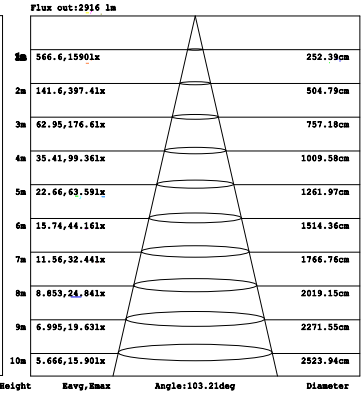


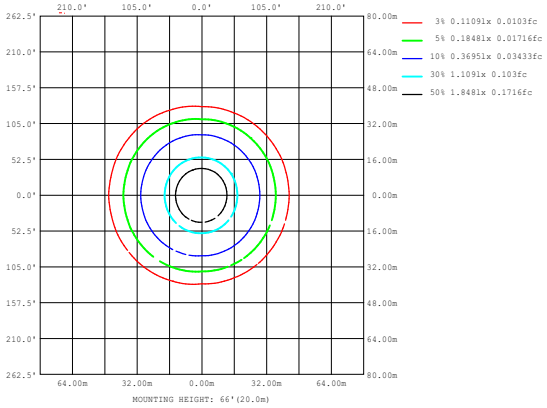
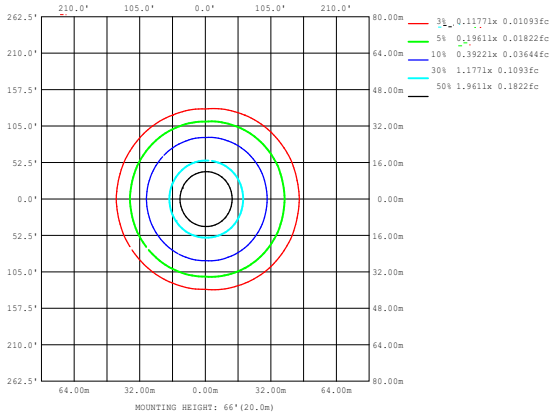


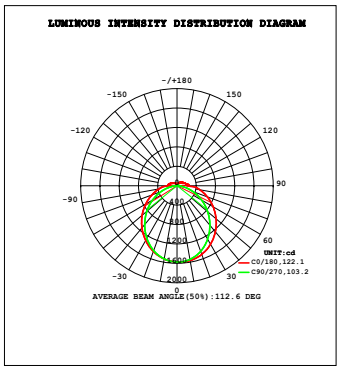

### WSD-ST4FT253040W27-3545K (40W&4000K)

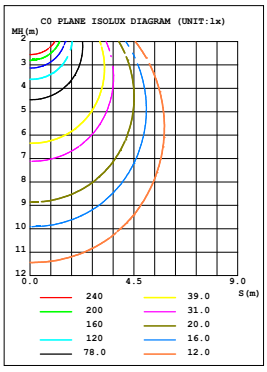






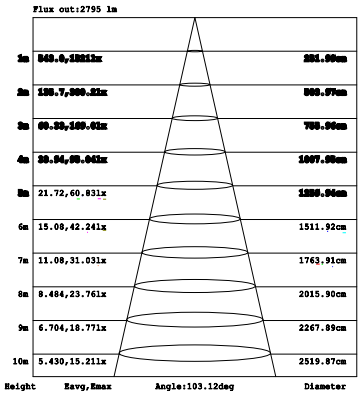



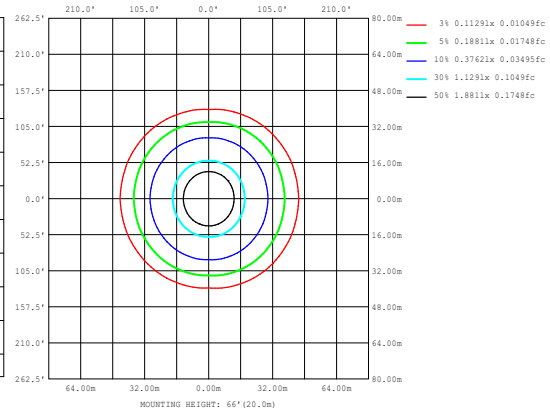


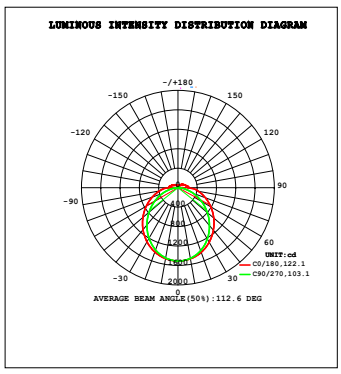

### WSD-ST4FT253040W27-3545K (40W&5000K)

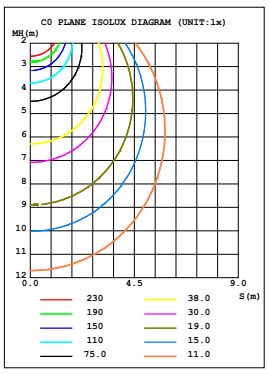

# LED Selectable Strip Linear Light


WSD LED INC
Green Lighting Resources


## Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


### PHOTOMETRICS


*For complete IES files, please visit our website.*

**WSD-ST8FT556065W27-3545K (65W&3500K)**

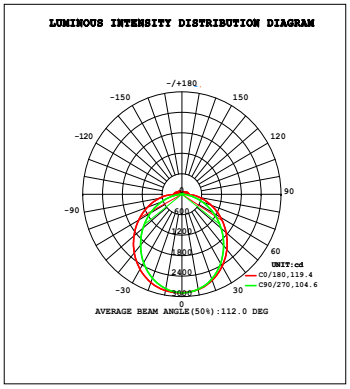


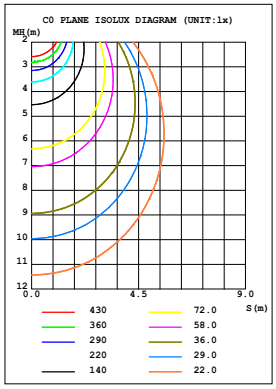


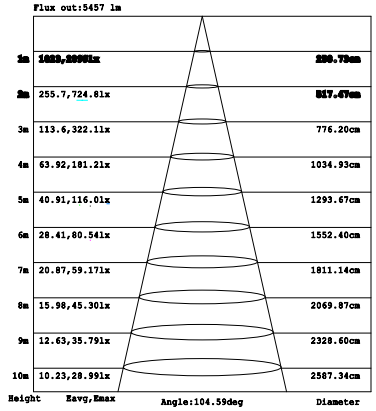
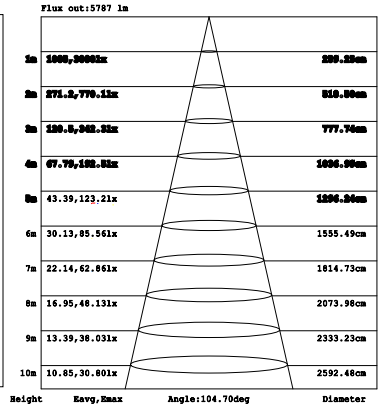


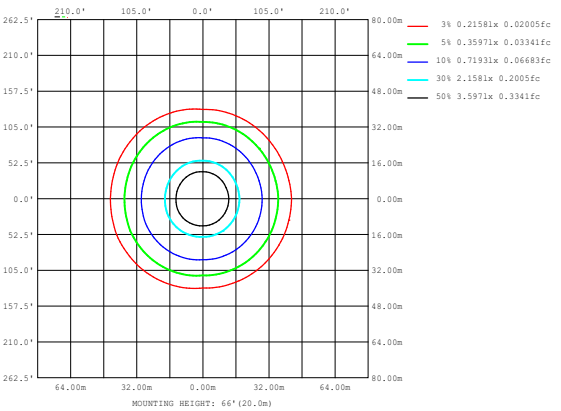
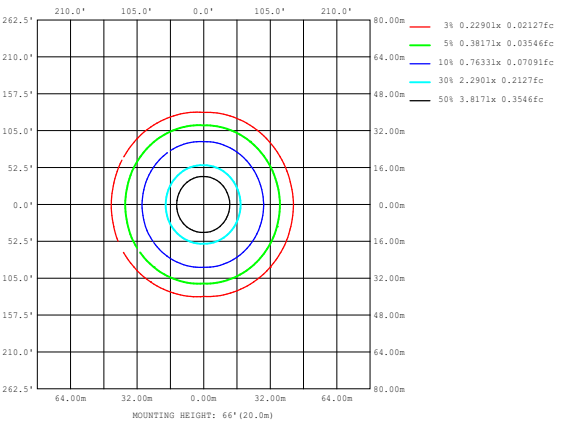


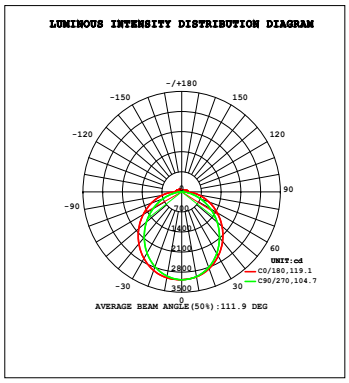

**WSD-ST8FT556065W27-3545K (65W&4000K)**

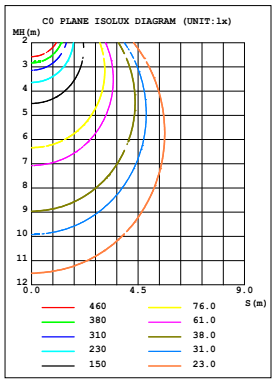


**WSD-ST8FT556065W27-3545K (65W&5000K)**

