

SPECIFICATION SHEET: FEP-120-600-L

This Is An Original Product From Fulham Co., Inc

Description: Sun Horse electronic ballast developed for use with


UV & tanning lamp applications, Sign Application.


This Ballast Will Operate Following Lamps.

F24T12HO, F30T12HO, F36T12HO, F48T12HO, F59T12HO, F60T12HO, F64T12HO, F72T12HO, F72T12HO(160W), F79T12HO(180 OR 200W)

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F24T12HO	F30T12HO	F36T12HO	F48T12HO	F60T12HO	F64T12HO	F72T12HO		
LAMPS OPERATED	4								
INPUT WATTS	120.3W	15 <mark>0.2W</mark>	168.9W	217.3W 272.8W		277.2W	322.0W		
LINE CURRENT:	1.096A	1.367A	1.538A 1.964A		2.459A	2.496A	2.898A		
POWER FACTOR	0.92 0.92		0.92	0.92	0.93	0.93	0.93		
BALLAST FACTOR	0.89	1.02	0.94	0.96	0.98	0.94	1.02		
EFFICACY FACTOR	0.74 0.68		0.56	0.44	0.36	0.34	0.32		
EMI/RFI COMPLIANCE		FCC PART 18-A							
SOUND RATING				" A "					
BALLAST TYPE		INSTANT START							
VOLTAGE TRANSIENTS		ANSI C82.11 - 1993 / C62.41							
THERMAL PROTECTION	AUTOMATIC RESETTING THERMAL SWITCH								
MIN. OPERATING TEMP	-18 °C (0 ° F)								
MAX. CASE TEMP	70 °C (158 °F)								
ENERGY STAR 4.0				-					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

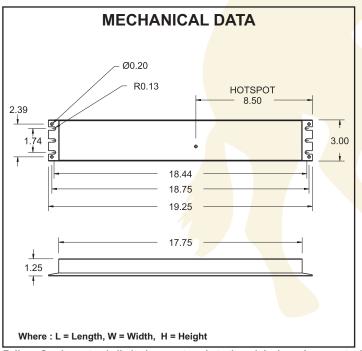

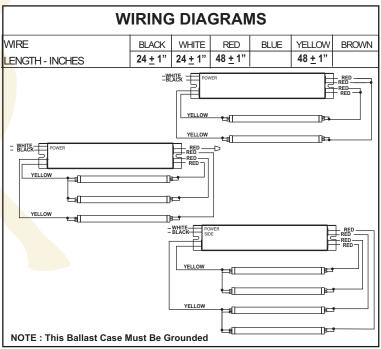

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>3 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



SPECIFICATION SHEET: FEP-120-600-L

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications, Sign Application.


This Ballast Will Operate Following Lamps.


_	 _
_	-
ч	=
\vdash	-
	_

F24T12HO, F30T12HO, F36T12HO, F48T12HO, F59T12HO, F60T12HO, F64T12HO, F72T12HO, F72T12HO(160W), F79T12HO(180 OR 200W)

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F24T12HO	F30T12HO	F36T12HO	F48T12HO	F60T12HO	F64T12HO	F72T12HO	F84T12HO	
LAMPS OPERATED					3				
INPUT WATTS	102.7W	126.2W	131.5W	177.5W	216.9W	231.6W	267.5W	310.0W	
LINE CURRENT:	0.932W	1.143A	1.195A	1.564A	1.924A	2.083A	2.408A	2.792A	
POWER FACTOR	0.93	0.92	0.93	0.94	0.94	0.93	0.93	0.93	
BALLAST FACTOR	0.99	1.18	0.91	1.02	1.00	1.00	1.13	1.08	
EFFICACY FACTOR	0.96	0.94	0.69	0.58	0.46	0.43	0.42	0.35	
EMI/RFI COMPLIANCE	FCC PART 18-A								
SOUND RATING			7		"A"				
BALLAST TYPE			INSTANT START						
VOLTAGE TRANSIENTS		ANSI C82.11 - 1993 / C62.41							
THERMAL PROTECTION		AUTOMATIC RESETTING THERMAL SWITCH							
MIN. OPERATING TEMP		-18 0C (0 0 F)							
MAX. CASE TEMP			70 °C (158 °F)						
ENERGY STAR 4.0					-				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

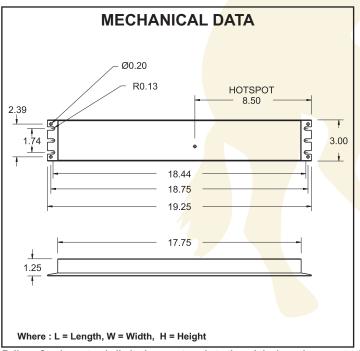

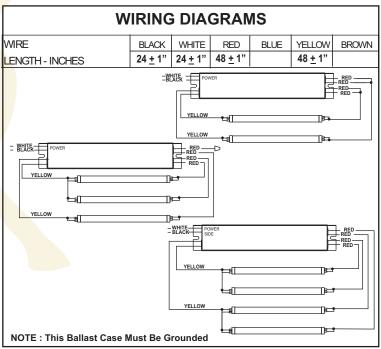

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>3 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



SPECIFICATION SHEET: FEP-120-600-L

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications, Sign Application.


This Ballast Will Operate Following Lamps.




F24T12HO, F30T12HO, F36T12HO, F48T12HO, F59T12HO, F60T12HO, F64T12HO, F72T12HO, F72T12HO(160W), F79T12HO(180 OR 200W)

Tanning Lamp

INPUT VOLT: 120V ± 10%, 50/60Hz								
LAMP WATTS/TYPE	F59T12HO	F72T12HO	F59T12HO	F72T12HO	F84T12HO	F72T12HO	F79T12HO	F79T12HO
	85W	100W	85W	100W	120W	160W	200W	200W
LAMPS OPERATED	4			3		2	1	
INPUT WATTS	272.8W	317.7	220.5W	266.1W	283.1W	244.4W	297.6W	217.2W
LINE CURRENT:	2.438A	2.828	1.979A	2.380A	2.546A	2.193A	2.660A	1.935A
POWER FACTOR	0.93	0.93	0.92	0.93	0.93	0.92	0.93	0.94
BALLAST FACTOR	0.80	0.82	0.86	0.89	0.81	0.78	0.77	1.09
EFFICACY FACTOR	0.29	0.26	0.39	0.34	0.29	0.32	0.26	0.50
EMI/RFI COMPLIANCE		4		FCC PA	RT 18-A			
SOUND RATING				" /	A "			
BALLAST TYPE				INSTAN'	T START			
VOLTAGE TRANSIENTS			Α	NSI C82.11 -	1993 / C62.4	41		
THERMAL PROTECTION		AUTOMATIC RESETTING THERMAL SWITCH						
MIN. OPERATING TEMP		-18 °C (0 ° F)						
MAX. CASE TEMP				70 °C (158 ⁰ F)			
ENERGY STAR 4.0					-			
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

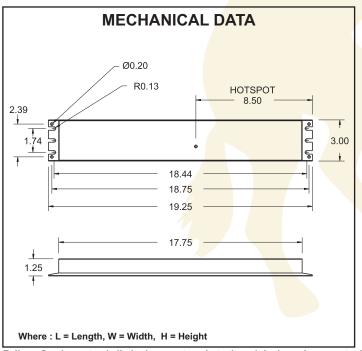

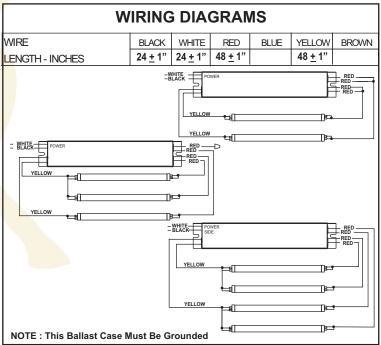

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>3 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.