

# PL-T Triple 4-Pin Base

## PL-T 26W/827/A/4P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

## Product data

Lamp Current (Nom) 0.335 A

Design Temperature 28 °C

Temperature

(Nom)

General Information			
Cap-Base	GX24Q-3 [ GX24q-3]	<ul> <li>Controls and Dimming</li> </ul>	
		Dimmable	Yes
<ul> <li>Light Technical</li> </ul>			
Color Code	827 [ CCT of 2700K]	<ul> <li>Mechanical and Housing</li> </ul>	S
Initial lumen (Nom) Luminous Flux (Rated) (Nom)	1750 lm 1750 lm	Cap-Base Information	4P
Color Designation	Incandescent White	<ul> <li>Approval and Applicatic</li> </ul>	on
Chromaticity Coor- dinate X (Nom)	418 Label (EEL)	Energy Efficiency Label (FEL)	В
Chromaticity Coor- dinate Y (Nom)		Mercury (Hg)	1.4 mg
Correlated Color Temperature (Nom)	2700 K	Content (Nom)	
Luminous Efficacy	64.8 lm/W	<ul> <li>Product Data</li> </ul>	
(rated) (Nom) Color Rendering Index (Nom)	82	Order product name EAN/UPC - Product Order code Numerator - Quan-	PL-T 26W/827/A/4P/ALTO 046677384401 458240 1
<ul> <li>Operating and Electrica</li> </ul>	I	tity Per Pack	
Power (Rated) (Nom)	27.0 W	Numerator - Packs per outer box	10
Lamp Current (Nom)	0 335 A	Material Nr. (12NC)	927910982750


PHILIPS

64.000 g FSM-26/27/1B-E-GX24q=3

Net Weight (Piece) ILCOS Code

# PL-T Triple 4-Pin Base


#### Dimensional drawing





	5	5

### Photometric data

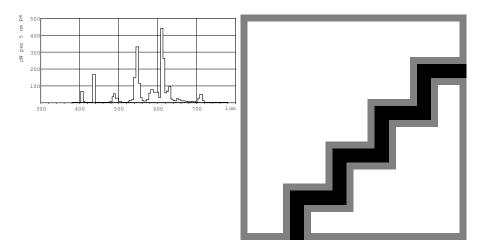



© 2015 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

#### PL-T ALTO 26W/827/4P A

Product	D	А	В	С
PL-T 26W/827/A/4P/ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm

2015, November 29 data subject to change