


LED



816-LED SERIES

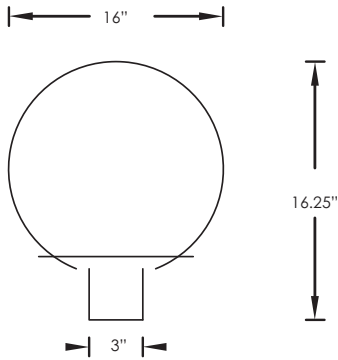

81615-12LEDGU

**STANDARD SPECIFICATIONS**

<b>Housing</b>	Polycarbonate (Specify Finish)
<b>Lens</b>	Acrylic (Specify Type)
<b>Lamp</b>	Included
<b>Certification</b>	Wet Location Listed

**REPLACEMENT PARTS**

**LENS-8161** | 16" White Acrylic Globe

PIER MOUNTS

PHOTOCELL / ADAPTER



PMB

PMW

PCA1

PCA5

PRODUCT FAMILY	LENS TYPE	FINISH	WATTAGE	OPTIONS
816 - 16" Globe	1 - White Globe 3 - Bronze Globe † 8 - Smoke Globe † 9 - Clear Globe †	1 - White 5 - Black	10LEDGU  12LEDGU  17LEDGU  20LED  27LED	120V, 60Hz Electronic Dimmable 9 Watts, 800 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW  120V, 60Hz Electronic Dimmable 11 Watts, 1100 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW  120V, 60Hz Electronic Dimmable 15 Watts, 1600 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW  120-277V, 50/60Hz Electronic 20 Watts, 2100 Lumens, E26 Base Options: 40K, 50K, PCA1, PCA5, PMB, PMW Not for use with dimmers, electronic switches or remote controls  120-277V, 50/60Hz Electronic 27 Watts, 3780 Lumens, E26 Base Options: 40K, 50K, PCA1, PCA5, PMB, PMW Not for use with dimmers, electronic switches or remote controls

**OPTION LEGEND**

<b>27K</b>	2700 Kelvin Warm White Light Temperature
<b>30K</b>	3000 Kelvin Warm White Light Temperature
<b>40K</b>	4000 Kelvin Cool White Light Temperature
<b>50K</b>	5000 Kelvin Full Spectrum White Temperature
<b>PCA1</b>	Photocell w/ Adapter White
<b>PCA5</b>	Photocell w/ Adapter Black
<b>PMB</b>	Pier Mount Black
<b>PMW</b>	Pier Mount White

† Additional lead time may apply.