


LED



818-LED SERIES

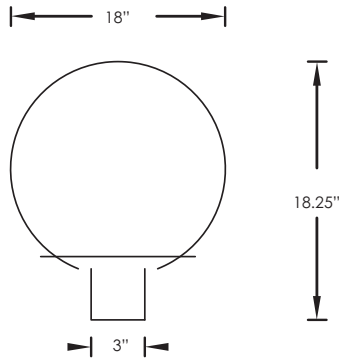

81815-12LEDGU

STANDARD SPECIFICATIONS

Housing	Polycarbonate (Specify Finish)
Lens	Acrylic (Specify Type)
Lamp	Included
Certification	Wet Location Listed

REPLACEMENT PARTS

LENS-8181 | 18" White Acrylic Globe

PIER MOUNTS

PHOTOCELL / ADAPTER



PMB

PMW

PCA1

PCA5

PRODUCT FAMILY	LENS TYPE	FINISH	WATTAGE	OPTIONS
818 - 18" Globe	1 - White Globe 3 - Bronze Globe † 8 - Smoke Globe † 9 - Clear Globe †	1 - White 5 - Black	10LEDGU 12LEDGU 17LEDGU 20LED 27LED	120V, 60Hz Electronic Dimmable 9 Watts, 800 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW 120V, 60Hz Electronic Dimmable 11 Watts, 1100 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW 120V, 60Hz Electronic Dimmable 15 Watts, 1600 Lumens, GU24 Base Options: 27K, 30K, 40K, PCA1, PCA5, PMB, PMW 120-277V, 50/60Hz Electronic 20 Watts, 2100 Lumens, E26 Base Options: 40K, 50K, PCA1, PCA5, PMB, PMW Not for use with dimmers, electronic switches or remote controls 120-277V, 50/60Hz Electronic 27 Watts, 3780 Lumens, E26 Base Options: 40K, 50K, PCA1, PCA5, PMB, PMW Not for use with dimmers, electronic switches or remote controls

OPTION LEGEND

27K	2700 Kelvin Warm White Light Temperature
30K	3000 Kelvin Warm White Light Temperature
40K	4000 Kelvin Cool White Light Temperature
50K	5000 Kelvin Full Spectrum White Temperature
PCA1	Photocell w/ Adapter White
PCA5	Photocell w/ Adapter Black
PMB	Pier Mount Black
PMW	Pier Mount White

† Additional lead time may apply.