



GE
Lighting

72266 - GE LFL UltraMax™ Professional Series Electronic High Efficiency Multivolt Instant Start Ballast

GE232MAX-N/ULTRA

- ☞ Energy saving high efficiency instant start electronic ballast (> 90%)
- ☞ Multi-Voltage Technology handles voltage from 120 to 277V
- ☞ UL Type CC Rating provides protection against arcing in electrical devices.
- ☞ Anti-Striation Control for better light quality, with no striations.
- ☞ Cold temperature -20F Minimum Starting Temperature

Product Photo



GENERAL CHARACTERISTICS

Ambient Temp [Max]	131 °F
Ambient Temp [Min]	-22 °F
Ballast Factor	Normal
Ballast Type	High Efficiency Multivolt Instant Start
Case Temperature (Max)	70 °C
Line Voltage Regulation (+/-)	10%
Classification (Regulations)	cUL Listed FCC - CLASS A Non-Consumer NRCan UL Class P UL Listed UL Type 1 Outdoor UL Type CC UL Type HL NEMA Premium® Product is compliant with material restriction requirements of RoHS
Sound Rating	A (20-24 decibels)
Starting Method	Instant start
Product Technology	Linear Fluorescent
Lamp Wiring	Parallel
Power Factor Correction	Active

PRODUCT INFORMATION

Product Code	72266
Description	GE232MAX-N/ULTRA
Alternative Unit Of Measure	EACH
Standard Package Quantity	10
Ean UPC	043168722667
Standard Package GTIN	00043168722667
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
Sales Unit	Each
UCC	043168722667
Alternative Unit Of Measure	CASE

DIMENSIONS

Weight	1.0 lb
Exit Type	
Remote Mount Distance	18.0 ft

Case Dimensions

Length	9.5in
Width	1.3in
Height	1.0in

Mounting Dimensions

Mount Length	8.89in
Mount Width	0.88in
Mount Slot	0.312in






Lead Color	Qty	Exit	Length (1 in.)
Black	1	Left	25in
Blue	2	Right	31in
Red	1	Left	37in
White	1	Left	25in

ELECTRICAL CHARACTERISTICS

Supply Current Frequency<Min>	50
-------------------------------	----

SAFETY & PERFORMANCE

- ☞ cUL_Listed
- ☞ FCC_CS_NCons
- ☞ NR_Can
- ☞ UL_Cls_P

-  UL_Listed
-  UL_Type1_Out
-  UL_Type_CC
-  UL_Type_HL
-  NEMA_Pre

CAUTIONS & WARNINGS

Warning

Risk of Electric Shock



Properly ground ballast and fixture.

Turn power off before servicing--see instructions.

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor (<=)	THD% (<=)	Min. Starting Temp (F/ C)
F17T8	1	120	19	0.16	0.92	5	0.99	1.5	9	-22
F17T8	1	277	19	0.08	0.92	5	0.87	1.5	16	-22
F17T8	2	120	32	0.27	0.92	3	0.99	1.5	7	-22
F17T8	2	277	32	0.12	0.92	3	0.96	1.5	13	-22
F25T12	1	277	27	0.1	0.93	3	0.95	1.5	13	0
F25T12	1	120	26	0.22	0.93	4	0.99	1.5	7	0
F25T12	2	120	48	0.4	0.93	2	0.99	1.5	5	0
F25T12	2	277	47	0.17	0.93	2	0.98	1.5	9	0
F25T8	1	120	25	0.21	0.93	4	0.99	1.5	8	-22
F25T8	1	277	26	0.98	0.93	4	0.94	1.5	13	-22
F25T8	2	120	45	0.38	0.93	2	0.99	1.5	6	-22
F25T8	2	277	45	0.16	0.93	2	0.98	1.5	10	-22
F28T8	2	120	48	0.4	0.85	2	0.99	1.5	4	60
F28T8	1	277	27	0.11	1.05	3	0.95	1.5	13	60
F28T8	1	120	27	0.23	1.05	3	0.99	1.5	7	60
F28T8	2	277	47	0.17	0.85	2	0.98	1.5	8	60
F32T8/WM	1	120	29	0.24	0.88	3	0.99	1.5	7	60
F32T8/WM	1	277	30	0.11	0.88	3	0.96	1.5	12	60
F32T8/WM	2	120	53	0.45	0.88	2	0.99	1.5	5	60
F32T8/WM	2	277	52	0.19	0.88	2	0.99	1.5	8	60
F32T8	2	120	54	0.47	0.88	2	0.99	1.5	5	-22
F32T8	1	120	31	0.26	0.87	3	0.99	1.5	7	-22
F32T8	2	277	53	0.2	0.88	2	0.99	1.5	8	-22
F32T8	1	277	31	0.12	0.87	3	0.96	1.5	12	-22
FE15T8	1	120	15	0.13	0.91	6	0.99	1.5	11	-22
FE15T8	1	277	16	0.08	0.91	6	0.78	1.5	40	-22
FE15T8	2	120	25	0.21	0.91	4	0.99	1.5	8	-22
FE15T8	2	277	25	0.97	0.91	4	0.95	1.5	16	-22
F32T8/25W	1	277	25	0.0	0.87	3	0.97	1.5	10	60
F25T8/WM	1	120	21	0.18	0.84	4	1.0	1.5	8	-22
F25T8/WM	1	277	21	0.09	0.84	4	0.93	1.5	13	-22
F32T8/25W	2	277	43	0.0	0.87	2	0.98	1.5	10	60
F17T8/WM	1	120	16	0.14	0.84	5	0.99	1.5	9	-22
F17T8/WM	2	120	26	0.22	0.85	3	1.0	1.5	7	-22
F17T8/WM	1	277	17	0.08	0.84	5	0.8	1.5	16	-22
F17T8/WM	2	277	26	0.1	0.85	3	0.95	1.5	13	-22
F25T8/WM	2	120	36	0.3	0.85	2	1.0	1.5	6	-22
F25T8/WM	2	277	36	0.14	0.85	2	0.97	1.5	10	-22
F29T8	2	120	48	0.41	0.81		1.0			
F29T8	1	120	30	0.25	0.81		1.0			
F29T8	2	277	47	0.18	0.81		0.98			
F29T8	1	277	30	0.11	0.81		0.96			
F31T8	2	120	51	0.43	0.8		1.0			
F31T8	1	120	29	0.24	0.8		1.0			
F31T8	2	277	50	0.18	0.8		0.98			
F31T8	1	277	29	0.11	0.79		0.95			

F26T8	2	120	44	0.37	0.8		1.0			
F26T8	1	120	26	0.22	0.8		1.0			
F26T8	2	277	43	0.16	0.8		0.98			
F26T8	1	277	26	0.1	0.8		0.95			

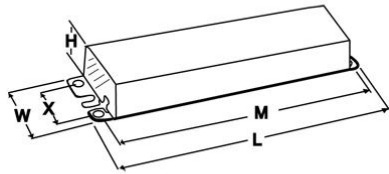

Nov 3, 2016 12:16:35 AM For additional information, visit www.gelighting.com