

LED



846-LED SERIES




84691 | WHITE



84695 | BLACK

PIER MOUNTS



PMB


PMW

STANDARD SPECIFICATIONS


Housing	Impact Resistant Polycarbonate (Specify Finish)
Lens	UV Stabilized Acrylic
Certification	Wet Location Listed
Mounting	3" OD Post Mount Only

REPLACEMENT PARTS

LENS-3801	White Acrylic Jar Lens
LENS-3809	Clear Ribbed Acrylic Jar Lens

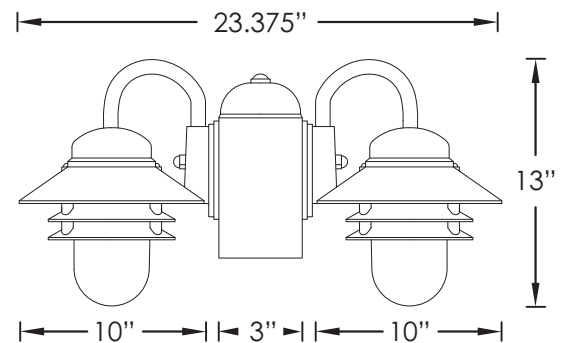

PRODUCT FAMILY	LENS TYPE	FINISH	MODEL	FEATURES & OPTIONS*
846				



- 1 - White
- 9 - Clear Ribbed

- 1 - White
- 5 - Black

OPTION LEGEND

27K	2700 Kelvin Warm White Light Temperature
30K	3000 Kelvin Warm White Light Temperature
40K	4000 Kelvin Medium White Light Temperature
PE	Photocell
PMB	Pier Mount Black
PMW	Pier Mount White

&L 9LED	120-277V, 60Hz Electronic Dimmable &&** Watts, % 00 Lumens Options: 30K, 40K, PMB, PMW
&L 10LEDGU	120V, 60Hz Electronic Dimmable 9 Watts, 1600 Lumens, GU24 Base Options: 27K, 30K, 40K, PE, PMB, PMW
&L 12LEDGU	120V, 60Hz Electronic Dimmable 22 Watts, 2200 Lumens, GU24 Base Options: 27K, 30K, 40K, PE, PMB, PMW
&L 13LED-120	120V, 50/60Hz Electronic, 120V Dimmable 28 Watts, 1800 Lumens, >80CRI Options: 30K, 40K, ES, PE, PMB, PMW

† Additional lead time may apply. * May not be available in all wattages or combinations, please call factory.