

LED LAMPS

ProLED® **Reflector Series**



Dimmable



25,000 Hour Life



Energy Saving

ProLED® Reflector lamps illuminate an atmosphere like Incandescent with long life and energy savings



Multipack Available

UL Listed for Damp Locations

Approved for use in ICAT Rated Luminaires

ENERGY STAR® Certified Options

Applications:

Downlighting
Education
Healthcare
Hospitality
Office
Retail

Markets:

Residential
Commercial

Halco
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

ProLED® Reflector Series


Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____


Specifications

- 8W BR30 is 87% more efficient than 65W Incandescent lamp¹
- 2700K, 3000K, 4000K & 5000K CCTs & pink provide consistent lamp-to-lamp color
- Dimmable to 5% for design flexibility
- Smooth-sided lightweight construction with full lens for even illumination from lamp
- Available in 6 count multipack
- 5 Year Limited Warranty for 25,000 hour lamps
- 3 Year Limited Warranty for 15,000 hour lamps

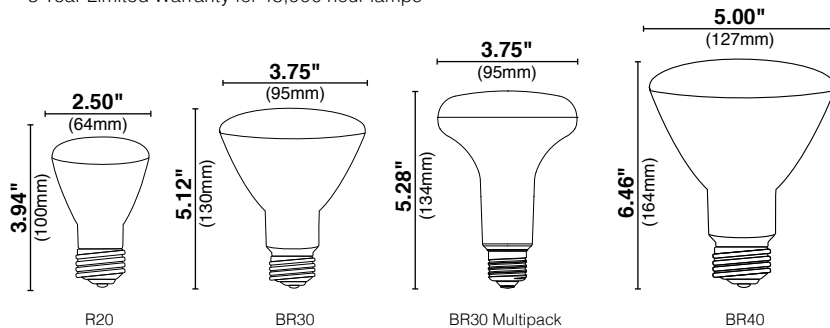

Savings Comparison

Total Lifetime Costs

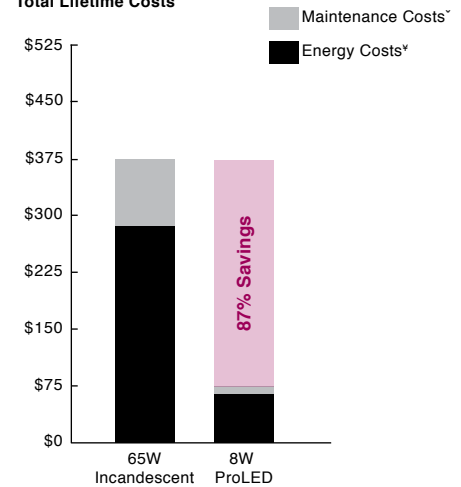

Ordering Information



| | Watt | Base | Product # | Product Code | Description | Volts | Color Temp. | CRI | Lumens | Useful Life* | Pkg. Qty. | MOL | Equivalent Wattage |
|------|------|--------|-----------|-------------------------|-------------|-------|-------------|-----|--------|--------------|-----------|-------|--------------------|
| BR30 | | | | | | | | | | | | | |
| | 8 | Medium | 80990 | BR30FL8/827/ECO/LED | Reflector • | 120 | 2700K | 82 | 650 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| | 8 | Medium | 80991 | BR30FL8/830/ECO/LED | Reflector • | 120 | 3000K | 82 | 670 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| | 8.5 | Medium | 80166 | BR30FL9/PNK/LED | Reflector • | 120 | Pink | 82 | - | 40,000 | 1/6 | 5.12" | 65 |
| | 9.5 | Medium | 80976 | BR30FL10/827/LED | Reflector • | 120 | 2700K | 82 | 750 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| | 9.5 | Medium | 80977 | BR30FL10/830/LED | Reflector • | 120 | 3000K | 82 | 770 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| | 9.5 | Medium | 80978 | BR30FL10/840/LED | Reflector • | 120 | 4000K | 82 | 800 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| | 9.5 | Medium | 80979 | BR30FL10/850/LED | Reflector • | 120 | 5000K | 82 | 830 | 25,000 ✓ | 1/6 | 5.12" | 65 |
| ✱ | 9.5 | Medium | 82068 | BR30FL9/830/ECO/LED/6PK | Reflector • | 120 | 3000K | 82 | 650 | 15,000 | 6/24 | 5.28" | 65 |
| BR40 | | | | | | | | | | | | | |
| | 11.5 | Medium | 80981 | BR40FL11/827/LED | Reflector • | 120 | 2700K | 82 | 940 | 25,000 ✓ | 1/6 | 6.46" | 75 |
| | 11.5 | Medium | 80980 | BR40FL11/830/LED | Reflector • | 120 | 3000K | 82 | 970 | 25,000 ✓ | 1/6 | 6.46" | 75 |
| | 16.5 | Medium | 80983 | BR40FL16/827/LED | Reflector • | 120 | 2700K | 82 | 1200 | 25,000 ✓ | 1/6 | 6.46" | 85 |
| | 16.5 | Medium | 80982 | BR40FL16/830/LED | Reflector • | 120 | 3000K | 82 | 1230 | 25,000 ✓ | 1/6 | 6.46" | 85 |
| | 16.5 | Medium | 80984 | BR40FL16/840/LED | Reflector • | 120 | 4000K | 82 | 1280 | 25,000 ✓ | 1/6 | 6.46" | 85 |
| | 16.5 | Medium | 80985 | BR40FL16/850/LED | Reflector • | 120 | 5000K | 82 | 1320 | 25,000 ✓ | 1/6 | 6.46" | 85 |
| R20 | | | | | | | | | | | | | |
| | 6.5 | Medium | 80989 | R20FL6/827/LED | Reflector • | 120 | 2700K | 82 | 525 | 25,000 ✓ | 1/6 | 3.94" | 50 |
| | 6.5 | Medium | 80986 | R20FL6/830/LED | Reflector • | 120 | 3000K | 82 | 540 | 25,000 ✓ | 1/6 | 3.94" | 50 |
| | 6.5 | Medium | 80987 | R20FL6/850/LED | Reflector • | 120 | 5000K | 82 | 580 | 25,000 ✓ | 1/6 | 3.94" | 50 |

○ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

Not for use in enclosed fixtures.

• May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.

Represents lamps that are ENERGY STAR® certified.

✓ ENERGY STAR® mandates that all directional lamps may only be listed at 25,000 hour life with 3,000 hour actual life test data, 6,000 hour LM80 data and in-situ temperature measurements. Upon completion of full lifetime testing, ProLED® ENERGY STAR® certified lamps will be listed at their full lifetime.

¹ Energy savings based on \$0.11 kWh over 40,000 hour life.

† While supplies last.