

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- Full Glass Design
- Super Wide View Angle, 240°
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS



RetroFlex™
LED T5HO LAMP • Simplicity.


Commercial Grade **LED T5 Lamp**

Specification Data


Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L48T5/835/24G-EB	48"	24W	27W	3500K	3200	83	240°	133	118	50000	Yes
L48T5/840/24G-EB	48"	24W	27W	4000K	3200	83	240°	133	118	50000	Yes
L48T5/850/24G-EB	48"	24W	27W	5000K	3200	83	240°	133	118	50000	Yes
L48T5/835/24G-EB	48"	8.5W	10W	3500K	1250	83	240°	140	125	50000	No
L48T5/840/24G-EB	48"	8.5W	10W	4000K	1250	83	240°	140	125	50000	No
L48T5/850/24G-EB	48"	8.5W	10W	5000K	1250	83	240°	140	125	50000	No

Wiring Diagram

1-LAMP Programmed Start Electronic Ballast



2-LAMP Programmed Start Electronic Ballast

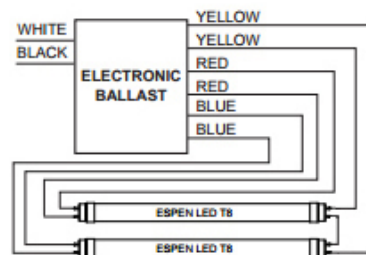

* Not compatible with products equipped with battery backup and/or emergency ballasts.

* Please refer to "Ballast Compatibility List" on Related Downloads.



Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.