

### Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long Life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes non-shunted(rapid start) sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- 5 Year Warranty
- Made of Glass



Commercial Grade **LED T8 Lamp**



# Flex™

Internal Driver **LED T8 Lamp**

### Specification Data

Model No.	Length	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Life	Operating Temp.
L48T8/835/14G-ID 48	14	14	120-277	3500	1800	83	325	120	50000	-20 ~ 40
L48T8/840/14G-ID 48	14	14	120-277	4000	1800	83	325	120	50000	-20 ~ 40
L48T8/850/14G-ID 48	14	14	120-277	5000	1800	83	325	120	50000	-20 ~ 40

### Ordering Information

EXAMPLE: **L48T8/840/14G-ID DE**

**L**

Manufacturer's Code

**48**

Normal Length  
48=48"

**T8**

Lamp Shape  
T8=T8

**8**

CRI  
8=>80

**40**

CCT  
50=5000K  
40=4000K  
35=3500K

**14 G**


Wattage  
14G-14W

-

**ID**

Internal Driver

### Wiring diagram

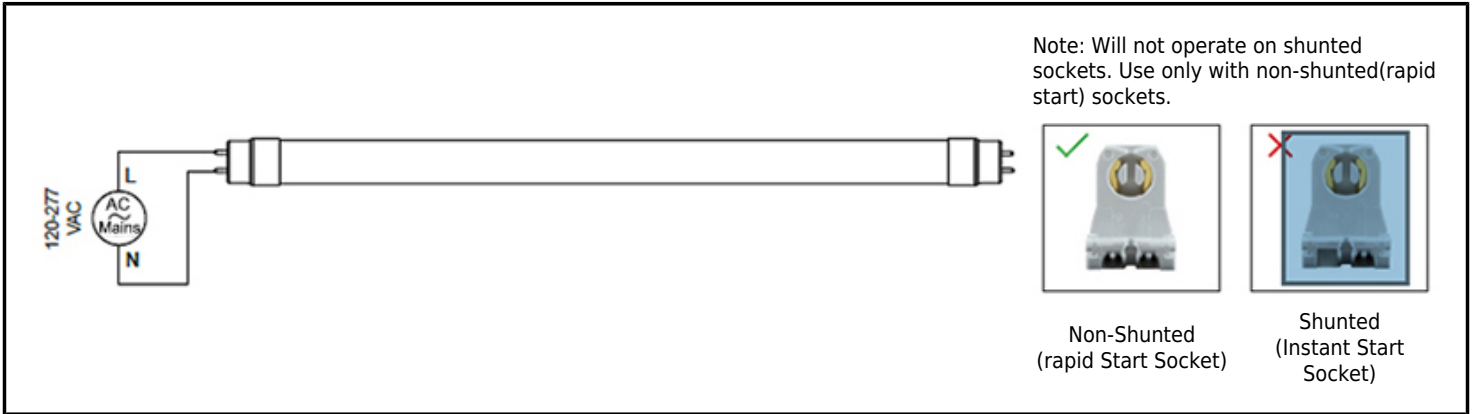

**Espen Technology, Inc.** | 12257 Florence Avenue | Santa Fe Springs, CA 90670 | Phone: (562) 529-2938 | Fax: (562) 529-2978  
Toll-free: (866) 933-7736 | Email: [info@espentech.com](mailto:info@espentech.com) | [www.espentech.com](http://www.espentech.com)