

### Features & Benefits

- No rewiring needed
- Works with fluorescent electronic ballast (Instant Start, Programmed Start, and Dimming)\*
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Compatible with controls and sensors
- Dimmable
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty



\* EMERGENCY BALLAST RESTRICTIONS



**RetroFlex™**  
LED T8 LAMP • Simplicity.  
Commercial Grade LED T8 Lamp

### Specification Data


Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L48T8/835/15G-EB	48	16	19	3500K	2200	83	325	135	125	50000	Yes
L48T8/840/15G-EB	48	16	19	4000K	2200	83	325	135	125	50000	Yes
L48T8/850/15G-EB	48	16	19	5000K	2200	83	325	135	125	50000	Yes

### System Performance


Lamp Model	Low Ballast Factor				High Ballast Factor			
	Lamp Power	System Power	Lumen Output	Lamp Efficacy	Lamp Power	System Power	Lumen Output	Lamp Efficacy
L48T8/835/15G-EB	13	15.5	1780	135	20	23	2700	135
L48T8/840/15G-EB	13	15.5	1780	135	20	23	2700	135
L48T8/850/15G-EB	13	15.5	1780	135	20	23	2700	135

### Wiring diagram


### 1-LAMP Instant Start Electronic Ballast

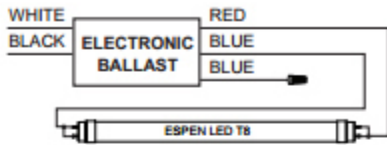


### 2-LAMP Instant Start Electronic Ballast

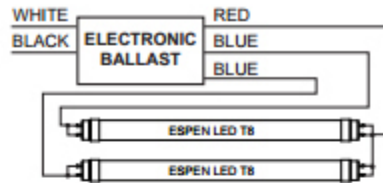


### 3-LAMP Instant Start Electronic Ballast

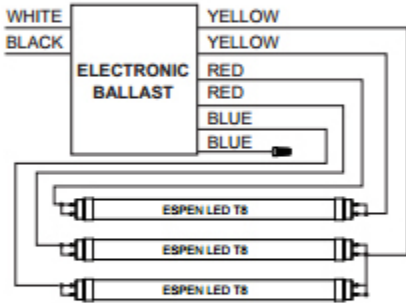


### 4-LAMP Instant Start Electronic Ballast

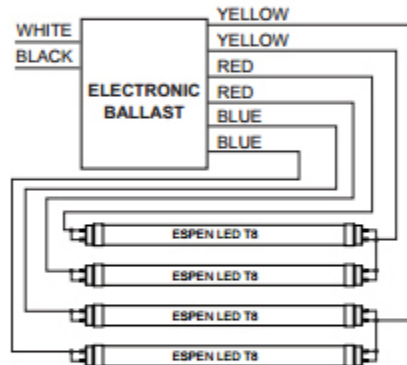

### 1-LAMP Programmed Start Electronic Ballast

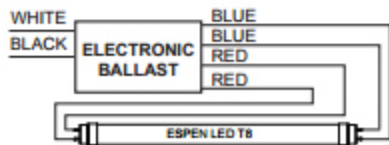

### 2-LAMP Programmed Start Electronic Ballast

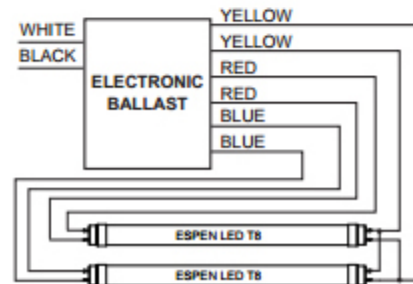

\* Not compatible with products equipped with battery backup and/or emergency ballasts.

\* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.