

130 SERIES



13011 13091 13015 13095

STANDARD SPECIFICATIONS

Housing	Impact Resistant Polycarbonate
Lens	Translucent UV Stabilized Acrylic
Lamp(s)	Lamp(s) Included
Certification	Wet Location Listed
Mounting	Ceiling Mount
Match	Impact Resistant 304 & 305



13211

130 Series



132 SERIES



13291 13215 13295

132 Series

130 Series

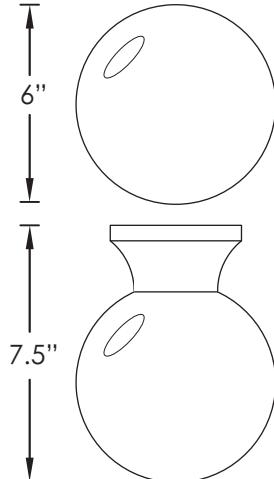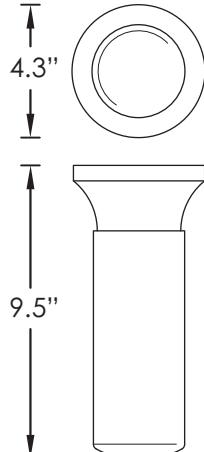

REPLACEMENT PARTS

LENS-1301	130 Series 8.5" Threaded White Jar
LENS-1309	130 Series 8.5" Threaded Clear Jar
LENS-1321	132 Series 6" Threaded White Globe
LENS-1329	132 Series 6" Threaded Clear Globe

PRODUCT FAMILY	LENS TYPE	FINISH	MODEL	FEATURES & OPTIONS*
130 - Jar	130 132	130 132	10LEDGU	120V, 60Hz Electronic, Triac Dimmable to 10% 9 Watts, 800 Lumens, >81 CRI, GU24 Base Options: 27K, 30K, 40K, PE
132 - Globe	1 - White 9 - Clear Prismatic	1 - White 5 - Black	12LEDGU	120V, 60Hz Electronic, Triac Dimmable to 10% 11 Watts, 1100 Lumens, >81 CRI, GU24 Base Options: 27K, 30K, 40K, PE

OPTION LEGEND

27K	2700 Kelvin Warm White Light Temperature
30K	3000 Kelvin Warm White Light Temperature
40K	4000 Kelvin Cool White Light Temperature
PE	Photocell (120V Only)

* May not be available in all wattages or combinations, please call factory. † Additional lead time may apply.