

- > Energy Saving 14 Watt Integrated LED
- > Uses 81% Less Energy than Equivalent 75 Watt Incandescent Bulb
- > Warm White 2700k CCT
- > Lasts 45 years or 50,000 Hours Continuous Use
- > Maintenance Free No Bulb Replacements
- > 5 Year Limited Warranty

12" Low Profile Flushmount

980 lms | 120-277VAC | Model 54436201 | Part FM-12-14-827-MV-N-B



SPECIFICATIONS

Model 54436201

Part FM-12-14-827-MV-N-B

Description 12" Round Low Profile - Non-Dimmable

Input Voltage (VAC) 120-277

Wattage 14

Average Rated Life¹ 50,000 hours

Typical Lumens² 980
CCT³ 2700k
Location Rating UL Damp

CRI⁴ 80

Beam Angle 120

Operating Temperature Min -4°F (-20° C),

Max 95°F (35° C)

Power Factor >0.9 **R9** 12

DUV -0.00089 CBCP 210

Operating Frequency (Hz) 50/60

- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra




ill: 1.855.ETi.SSLI 1.855.384.7754









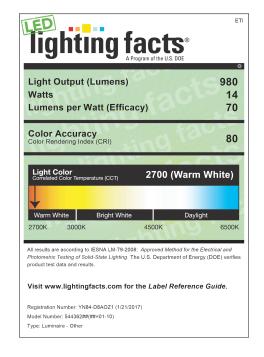



12" Low Profile Flushmount

980 lms | 120-277VAC | Model 54436201 | Part FM-12-14-827-MV-N-B

SHIPPING INFORMATION

Model 54436201

Part FM-12-14-827-MV-N-B

 UPC
 849489001234

 Product Dimensions (L x W x H in.)
 11.5 x 11.5 x 2.95

 Product Dimensions (L x W x H cm.)
 29.2 x 29.2 x 7.5

Product Weight (lbs.)

Inner Carton Quantity

N/A

Inner Carton Bar Code

N/A

Inner Carton Dimensions (L x W x H in.)

Inner Carton Dimensions (L x W x H cm.)

N/A

Inner Carton Weight (lbs)

N/A

Master Carton Quantity

1.08

N/A

N/A

Master Carton Bar Code50849489001239Master Carton Dimensions (L x W x H in.)20.47 x 12.95 x 13.15Master Carton Dimensions (L x W x H cm.)52.0 x 32.9 x 33.4

Master Carton Weight (lbs) 10.8
Pallet Quantity 108

AVAILABLE ACCESSORIES

Model Description 95443620101 Diffuser Lens

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etissl.com/fcc15b

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754

720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256

ETi Solid State Lighting, Inc.