



# LED Wet Location S14

Non-Dimmable

Perfect for applications with hard to reach areas, vibration, and frequent starts.

## Limitless options for the following applications:

- Chandeliers
- Ceiling Fans
- Decorative
- Indoor Fixtures
- Outdoor Fixtures
- Scoreboards
- Movie Signs

## Great features and benefits:

- Long Life: 25,000 hours—no more bulb replacements
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations
- Wet location to replace cold cathodes

Wet Location S14 lamps are non-dimmable



S14 Clear

S14 Frosted




<b>LED</b>	25,000 hours average rated life, 120 volts
------------	--

**Applications**

Ideal for decorative applications—suitable for outdoor fixtures  
Also perfect for applications with hard to reach areas, vibration, and frequent starts

**Accent and decorative lighting including:**

- + Chandeliers
- + Ceiling Fans
- + Decorative
- + Indoor Fixtures
- + Outdoor Fixtures
- + Scoreboards
- + Movie Signs




Light output equivalent to 40W  
Cold cathode replacement


**Features and Benefits**

- Long Life: 25,000 hours—no more bulb replacements
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations
- Wet location to replace cold cathodes

Wet Location S14 lamps are non-dimmable



**LED5E26S1427K**

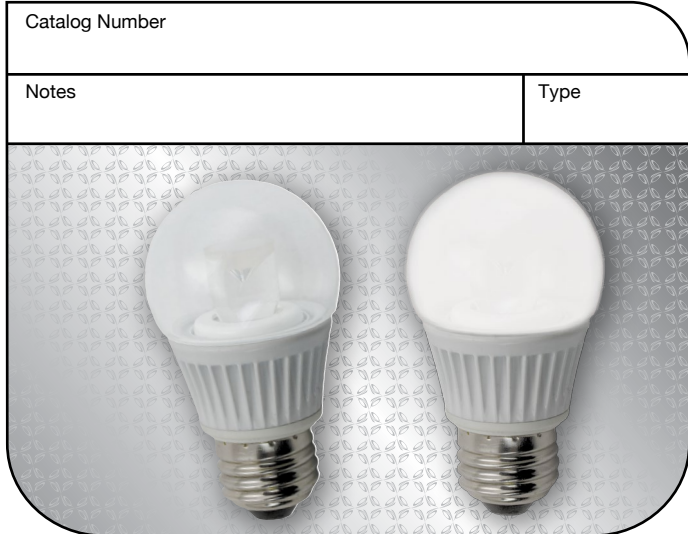

**Specifications ( at full brightness )**

Input Line Voltage:	120VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
UL/cUL Listed	Yes
Power Factor	92%
CRI	80

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Wattage Equivalent	M.O.L. (inches)	Diameter (inches)	Lumens	LPW	CCT	CRI
<b>5</b> YEAR WARRANTY  	LED5E26S1427K	LED 5W WET LOCATION S14 - 2700K	120	5.0	40W	3.8	1.4	300	60	2700K	80
	LED5E26S1430K	LED 5W WET LOCATION S14 - 3000K	120	5.0	40W	3.8	1.4	300	60	3000K	80
	LED5E26S1441K	LED 5W WET LOCATION S14 - 4100K	120	5.0	40W	3.8	1.4	300	60	4100K	80
	LED5E26S1427KF	LED 5W WET LOCATION S14 - 2700K Frosted	120	5.0	40W	3.8	1.4	300	60	2700K	80
	LED5E26S1430KF	LED 5W WET LOCATION S14 - 3000K Frosted	120	5.0	40W	3.8	1.4	300	60	3000K	80
	LED5E26S1441KF	LED 5W WET LOCATION S14 - 4100K Frosted	120	5.0	40W	3.8	1.4	300	60	4100K	80
	For the most up-to-date specs, please visit <a href="http://www.tcp.com">www.tcp.com</a>										