



KT-LED15T8-48GC-8XX-X


T8 LED LAMP | LightBulbSurplus.com

WIRING: Plug & Play


Simply replace the existing fluorescent lamp with Keystone Combo Drive LED lamp. No changes to the existing fluorescent ballast wiring needed. For ballast compatibility questions, please contact Keystone.

WIRING: Bypass Ballast

Typical Ballast Configurations:

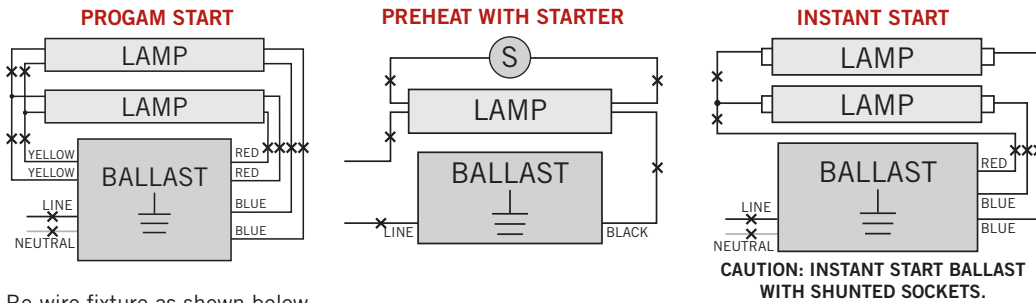

Re-wire fixture as shown below.

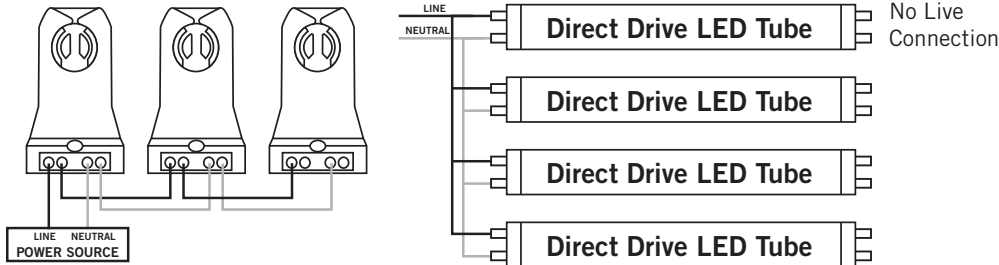

Typical Non-Shunted Lampholder

Connect wires directly to these terminals

CAUTION: Use only non-shunted lampholders.
Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above.

Keystone can provide any style replacement lampholders. Call us at 800-464-2680.

PHYSICAL CHARACTERISTICS

LAMP DIMENSIONS

A	A (Illuminated Length)	42.5"
B	B (Body Length)	47.15"
C	C (Diameter)	1.00"

NOMINAL LENGTH: 48" BASE TYPE: G13 (Medium Bi-Pin)