

Series Trinidad

DESCRIPTION


These textured streetlamp globes are designed for commercial and residential post top applications and are available with fitter neck.

MATERIALS

- **Polycarbonate** - UV stabilized with continuous operating temperature of 100°C to 125°C and high impact resistance down to -40°C, transmittance of 88% (application dependent). Polycarbonate streetlamps are available in clear.
- **Acrylic** - Impact modified and UV resistant with continuous operating temperature up to 80°C. Maximum transmittance of 92% (clear). Acrylic streetlamps are available in clear or white.
- **LD Acrylic** - Impact modified and UV resistant with continuous operating temperature up to 80°C and transmittance of 90% to 94% (application dependent).



FITTER NECK (F)

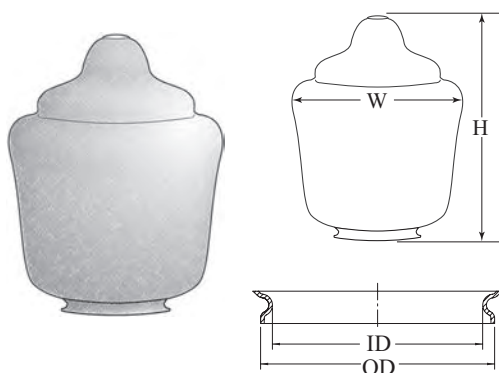


ITEM NO.	HEIGHT	WIDTH	ID (NECK)	OD (NECK)	MATERIAL	COLOR
88260-CL-8F	20.69"	15.40"	7.13"	7.94"	Acrylic	Clear
88260-WH-8F	20.69"	15.40"	7.13"	7.94"	Acrylic	White
88260-LD-8F	20.69"	15.40"	7.13"	7.94"	LD Acrylic	Frost
88260-CL-9F*	19.87"	15.40"	8.25"	9.12"	Acrylic	Clear
88260-WH-9F*	19.87"	15.40"	8.25"	9.12"	Acrylic	White
88260-LD-9F*	19.87"	15.40"	8.25"	9.12"	LD Acrylic	Frost
88261-CL-6F	18.24"	13.40"	5.21"	6.00"	Acrylic	Clear
88261-LD-6F**	18.24"	13.40"	5.21"	6.00"	LD Acrylic	Frost
88261-CL-8F	17.58"	13.40"	7.14"	8.00"	Acrylic	Clear
88261-LD-8F**	17.58"	13.40"	7.14"	8.00"	LD Acrylic	Frost
88060-CL-8F	20.69"	15.40"	7.13"	7.94"	Polycarbonate	Clear
88060-CL-9F*	19.87"	15.40"	8.25"	9.12"	Polycarbonate	Clear
88061-CL-6F	18.24"	13.40"	5.21"	6.00"	Polycarbonate	Clear
88061-CL-8F	17.58"	13.40"	7.14"	8.00"	Polycarbonate	Clear

*9F Aluminum Neck Fitter Attached. **Minimum order quantities apply.

OPTIONAL ACCESSORIES

Finial



Aluminum Top



Internal Heat Shield

