Selectable LED 5CCT Under Cabinet Light

Wattages: 5W, 12W, 16W, 20W



The Selectable LED 5CCT Under Cabinet Light series is a next generation,direct wire under cabinet fixture that Provides task or accent lighting in commercial,retail,hospitality and residential applications.

- ♦ Lumen Maintenance, L70 > 50,000 hours.
- ♦ High efficiency LED Driver, the wide range input voltage AC120V.
- ♦ Triac dimming default.
- ♦ Long-life, high-efficacy, micro-power LEDs.

STRUCTURE FEATURES:

- ♦ Shell materials: Metal & PC
- ♦ Finish:White(Standard)
- ♦ Length:305/610/838/1016mm (12"/24"/33"/40")
- ♦ Width:90mm(3.54")
- ♦ Depth:35mm(1.38")
- ♦ Net weight : 0.48/0.86/1.13/1.36(kg) 1.06/1.90/2.50/3.00(lbs)

DIMENSION:

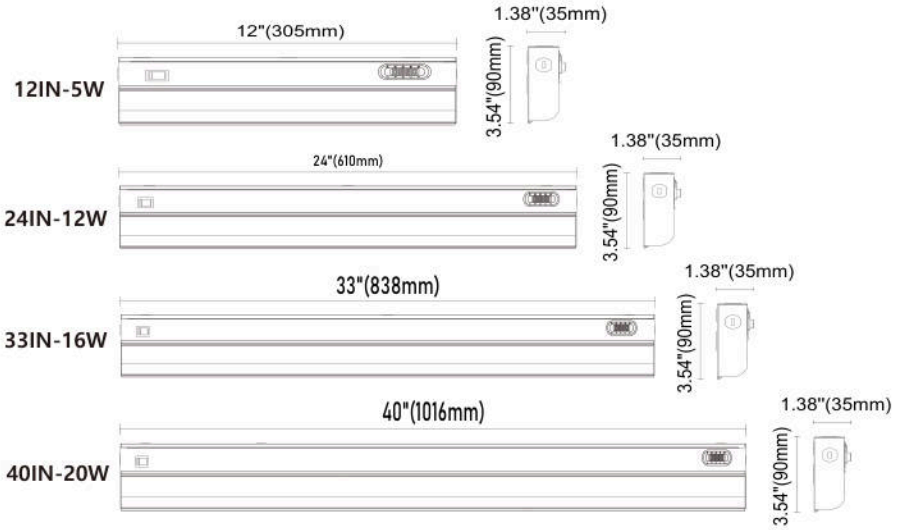

SPECIFICATION				
TYPE	WSD-UC12IN05W12-5CCT-W	WSD-UC24IN12W12-5CCT-W	WSD-UC33IN16W12-5CCT-W	WSD-UC40IN20W12-5CCT-W
WATTAGE	5 W	12 W	16 W	20 W
LUMEN	350.44 lm	840.74 lm	1120.9 lm	1400.7 lm
EFFICACY	> 70.37 lm/W	> 75 lm/W	> 70.72 lm/W	> 70.86 lm/W
CCT	2700K,3000K,3500K,4000K,5000K			
CRI	90			
INPUT VOLTAGE	AC120V			
BEAM ANGLE	117°			
POWER FACTOR	0.90			
DRIVER EFFICACY	90%			
DIMMING	traic dimming			
LIFE S	over 50,000 hrs			
WORKING TEMPERATURE	-22°F ~ 113°F			
STORAGE TEMPERATURE	-40°F ~ 176°F			
OUTDOOR RATING	damp location			
FACTORY SETTINGS	4000K			
CABLE	none			
WARRANTY	5 year limited			

Selectable LED 5CCT Under Cabinet Light

Wattages: 5W, 12W, 16W, 20W





High performance, galvanized stell heat sink transfers heat from the light engine to the environment, via large coolinigns,drawing heat away from the i xture,and extending the lifespan of the LEDs.





MOUNTING:

- Surface Mounting

APPLICATIONS:

- Under and over cabinets
- Display cases
- Task lighting
- Office lighting
- Coves
- Utility / work areas

ACCESSORIES (Standard)



PACKAGING INFORMATION :

- **WSD-UC12IN05W12-5CCT-W**
  332mmX218mmX210mm(10 Pcs/CTN)
  (13.07"X8.58"X8.27")
- **WSD-UC24IN12W12-5CCT-W**
  636mmX218mmX210mm(10 Pcs/CTN)
  (25.04"X8.58"X8.27")
- **WSD-UC33IN16W12-5CCT-W**
  863mmX218mmX210mm(10 Pcs/CTN)
  (33.98"X8.58"X8.27")
- **WSD-UC40IN20W12-5CCT-W**
  1042mmX218mmX210mm(10 Pcs/CTN)
  (41.02"X8.58"X8.27")

ORDERING INFORMATION

EXAMPLE:

WSD-UC12IN05W12-5CCT-W

WSD	UC	12IN	05W	12	5CCT	W
COMPANY	PRODUCT	SIZE	POWER	VOLTAGE	CCT	FINISH
WSD LED INC	**UC** (Under Cabinet LIGHT)	**12IN**-(12 inch) **24IN**-(24 inch) **33IN**-(33 inch) **40IN**-(40 inch)	**05W** - (5W) **12W** - (12W) **16W** - (16W) **20W** - (20W)	**12** (AC120V)	**5CCT** 2700K/3000K /3500K/4000K /5000K	**W** - (White)

Selectable LED 5CCT Under Cabinet Light

WSD LED INC
Green Lighting Resources

Wattages: 5W, 12W, 16W, 20W

PHOTOMETRICS

WSD-UC12IN05W12-5CCT-W

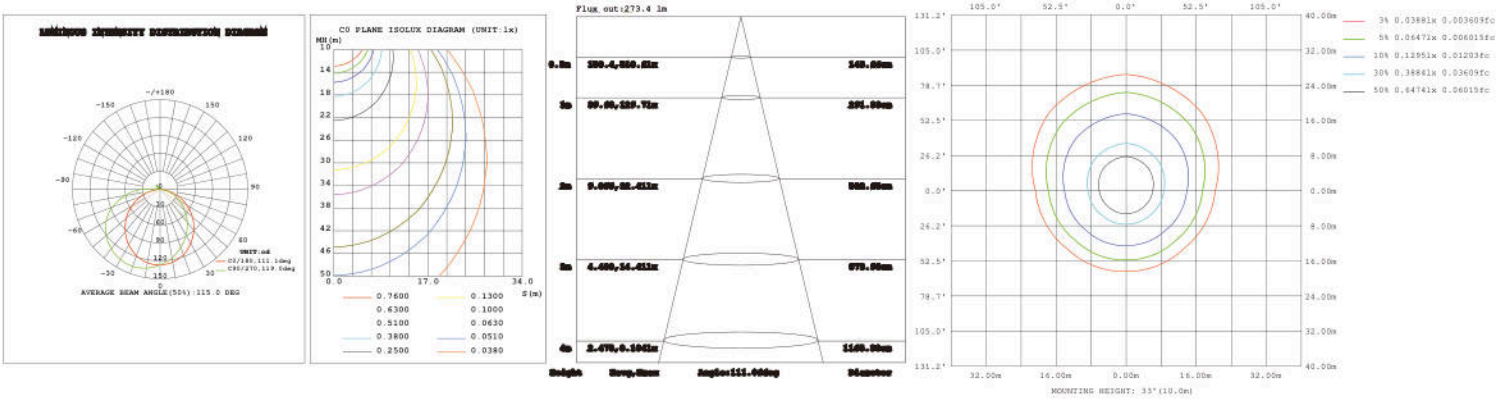

WSD-UC24IN12W12-5CCT-W

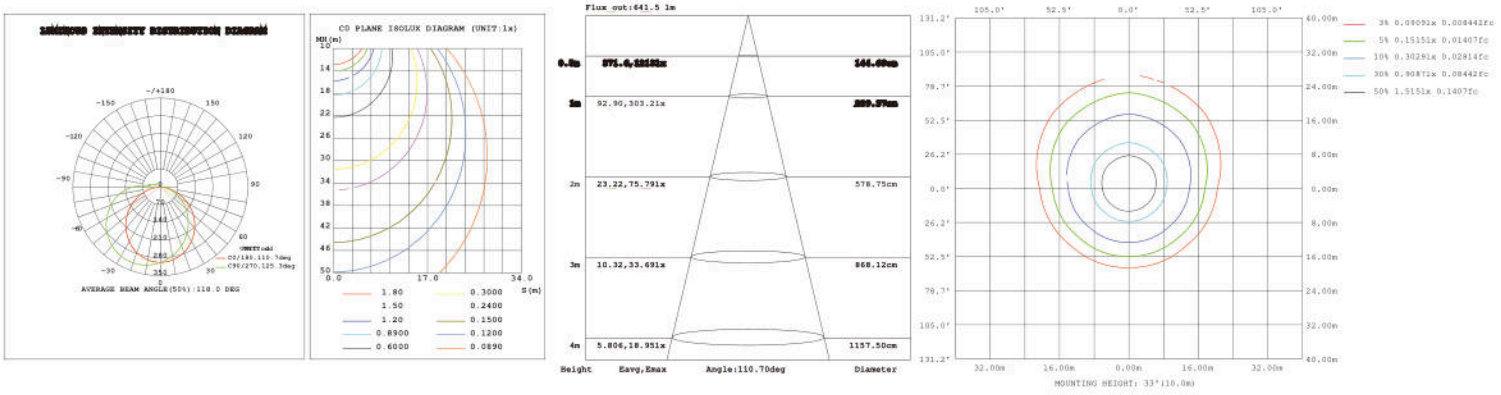

WSD-UC33IN16W12-5CCT-W

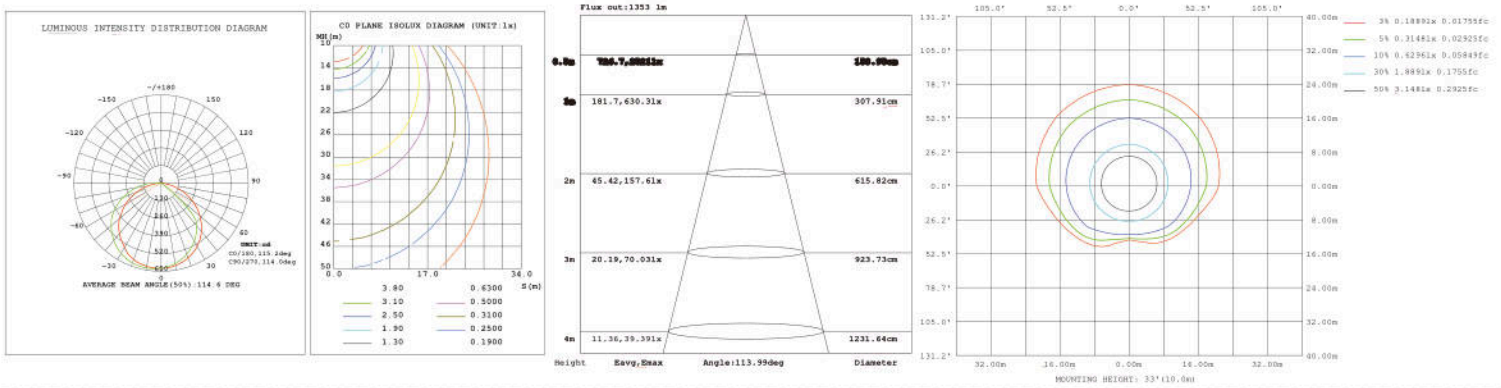

WSD-UC40IN20W12-5CCT-W

