

Project _____
 Schedule / Date _____
 Notes _____
 Catalog Number _____

FMS

Product Description

naturalLED® Flush Mount Streamlined (FMS) is an excellent LED replacement solution for Compact Fluorescent or Incandescent lights. Our FMS works in a variety of applications and is a simple streamlined design. These fixtures are designed with an even and consistent distribution of light and are available in 11 and 15 inch, the FMS has a twist-lock glass lens and your choice of a bronze or nickel finish.



Features & Benefits

- ▶ Energy Star Certified
- ▶ UL Damp
- ▶ Uniform light distribution and consistent color
- ▶ Easy Installation
- ▶ Twist Lock Glass Lens
- ▶ Retrofit for CFL and Incandescent Flush Mount

Specifications

- ▶ Input line voltage: 120
- ▶ Powerfactor >0.9
- ▶ Dimmable
- ▶ Operating temperature: -22°F ~ 122°F
- ▶ Finish: Glass and aluminum

Applications

- ▶ Bathroom Lighting
- ▶ Decoration Lighting
- ▶ Hallway Lighting
- ▶ Bedroom Lighting
- ▶ Hospitality Lighting

RETROFIT / SAVE ENERGY

Replace CFL and Incandescent light with LED



Color Options




Ordering Information

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Size	Color	Dim	Rated Hrs	DAMP LOCATION	ENERGY STAR
7418	LED11FMS-98L830-BZ	3000K	14	980	100	11"	Bronze	Yes	50,000	•	•
7419	LED11FMS-98L840-BZ	4000K	14	980	100	11"	Bronze	Yes	50,000	•	•
7421	LED15FMS-154L830-BZ	3000K	22	1,540	150	15"	Bronze	Yes	50,000	•	•
7422	LED15FMS-154L840-BZ	4000K	22	1,540	150	15"	Bronze	Yes	50,000	•	•
7424	LED11FMS-98L830-NI	3000K	14	980	100	11"	Nickel	Yes	50,000	•	•
7425	LED11FMS-98L840-NI	4000K	14	980	100	11"	Nickel	Yes	50,000	•	•
7427	LED15FMS-154L830-NI	3000K	22	1,540	150	15"	Nickel	Yes	50,000	•	•
7428	LED15FMS-154L840-NI	4000K	22	1,540	150	15"	Nickel	Yes	50,000	•	•

Photometric Data


11FMS - 14W

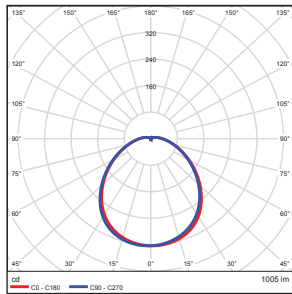


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	253.58	25.20
0-40	414.09	41.20
0-60	716.31	71.30
60-80	185.31	18.40
70-80	76.14	7.60
90-120	50.92	5.10
90-180	54.37	5.40
0-180	1004.51	100.00

Total Luminaire Efficiency = 100.00%

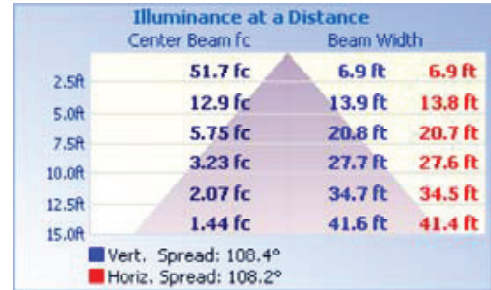


15FMS - 22W

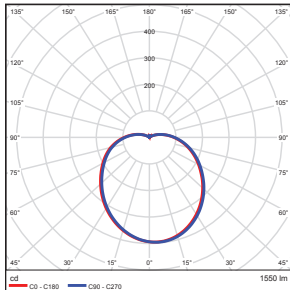

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	304.41	19.60
0-40	500.31	32.30
0-60	916.44	59.10
60-80	349.62	22.60
70-80	160.50	10.40
90-120	147.76	9.50
90-180	161.69	10.40
0-180	1550.3	100.00


Total Luminaire Efficiency = 100.00%

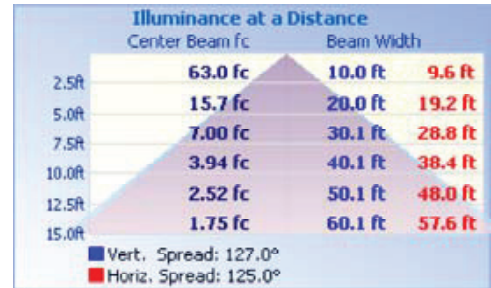

Product Dimensions


11-inch

Weight: 3.30-lbs

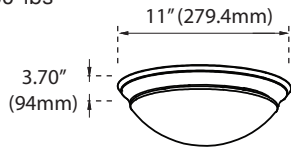


15-inch

Weight: 4.75-lbs

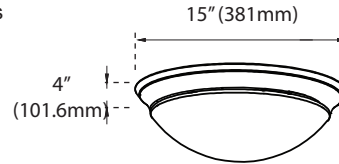

Package



Package
(Master)

2