

Version	2.0	Date	8/11/2022
Prepared By	J.C		

PRODUCT SPECIFICATION

Category	LED Slim Wallpack
Item Number	9590
Stock Code	FXSWP45SW/8CCT3/BK/347-PHO
Mounting	Wall mount
Housing Color	Black



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	45/28/15	Replacement Wattage (W)	-
Tested Wattage (W)			
Input Voltage (V)	120-347	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.41	AUX (12V) Line	-
Power Factor	≥ 0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	5400/3360/1800	CCT (K)	30/40/50K
Efficacy (lm/w)	120lm/w	Beam Angle (°)	Flood
CRI	> 80		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-22 ~ 122
Storage Temperature (°F)	-40 ~ 158
IP Rating	IP65
Rated Life	50000 hrs.
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description
P10005	MT-SB-SWP/BK	Mount - SWP Swivel Bracket Black
P10006	MT-KNC-SWP/BK	Mount - SWP Knuckle Black
P10007	MT-SF-SWP/BK	Mount - SWP Slip Fitter Black

PRODUCT DIMENSIONS

Width- in (mm)	6.57" / 167mm
Height- in (mm)	7.87" / 200mm
Depth- in (mm)	3.94" / 100mm
EPA (ft²)	-
Weight (lbs)	4.4
Mounting Height (ft)	-
Cable Length (ft)	-

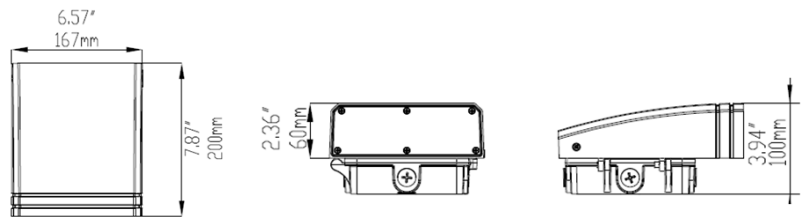

CERTIFICATIONS

UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	-

COMMENTS

--	--	--	--