



GE
Lighting

97782 - GE LFL Resi Proline Resi Proline Electronic Standard Instant
Start Ballast

GE232-120-RES

Product Photo



GENERAL CHARACTERISTICS

Ambient Temp [Max]	40 °C
Ballast Factor	Normal
Ballast Type	Standard Instant Start
Case Temperature (Max)	70 °C
Enclosure Type	Metal
Classification (Regulations)	ANSI - C62.41 cUL Listed UL Class P UL Type 1 Outdoor UL Type HL FCC Part 18 Class B at 120 volts Product is compliant with material restriction requirements of RoHS
Sound Rating	A (20-24 decibels)
Starting Method	Instant start
Product Technology	Linear Fluorescent
Lamp Wiring	Parallel
Power Factor Correction	Active

PRODUCT INFORMATION

Product Code	97782
Description	GE232-120-RES
Alternative Unit Of Measure	EACH
Standard Package Quantity	10
Ean UPC	043168977821
Standard Package GTIN	00043168977821
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
Sales Unit	Each
UCC	043168977821
Alternative Unit Of Measure	CASE

DIMENSIONS

Weight	1.65 lb
Exit Type	
Remote Mount Distance	18.0 ft

Case Dimensions

Length	9.5in
Width	1.7in
Height	1.18in

Mounting Dimensions

Mount Length	8.89in
Mount Width	1.13in
Mount Slot	0.312in

Lead Color	Qty	Exit	Length (1 in.)
Black	1	Left	25in
White	1	Left	25in
Blue	2	Right	31in
Red	1	Right	45in

ELECTRICAL CHARACTERISTICS


Supply Current Frequency<Min>	50
-------------------------------	----

SAFETY & PERFORMANCE

- ANSI_C62
- cUL_Listed
- UL_Cls_P
- UL_Type1_Out
- UL_Type_HL
- FCC_Part_18
- Pro_comp_res_req

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor (<=)	THD% (<=)	Min. Starting Temp (F/ C)
F17T8	1	120	20	0.37	1.03	5	0.45	1.7	195	0
F25T8	1	120	28	0.48	1.04	4	0.48	1.7	178	0
F28T8	1	120	29	0.5	0.97	3	0.48	1.7	177	50
F28T8	2	120	46	0.72	0.81	2	0.05	1.7	152	50
F32T8/WM	1	120	32	0.54	0.99	3	0.48	1.7	170	50
F32T8	2	120	53	0.81	0.83	2	0.05	1.7	145	0
F17T8	2	120	31	0.52	0.88	3	0.49	1.7	172	0
F32T8	1	120	32	0.55	0.99	3	0.48	1.7	170	0
F25T8	2	120	43	0.69	0.88	2	0.05	1.7	155	0
F32T8/WM	2	120	51	0.79	0.82	2	0.05	1.7	146	50

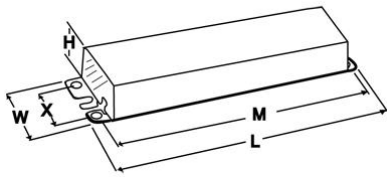

Nov 2, 2016 3:21:42 AM For additional information, visit www.gelighting.com