

SPECIFICATION SHEET : WH1-120-L

This Is An Original Product From Fulham Co., Inc


Description : WorkHorse Series Versatile, Potted Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight.

ELECTRICAL DATA

This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

INPUT VOLT: 120V ± 10%, 50/60Hz LAMP WATTS/TYPE LAMPS OPERATED INPUT WATTS LINE CURRENT **BALLAST FACTOR EFFICACY FACTOR** F21T5 23 0.20 0.9 4.0 1 F14T5 1 0.16 0.9 5.3 18 F13T5 1 18 0.16 1.1 6.2 F8T5 1 12 0.11 1.3 10.8 F28T5 30 0.26 0.9 3.0 1 F11T2 2 22 0.19 0.8 3.6 POWER FACTOR > 0.9 THD < 34.6 % EMI/RFI COMPLIANCE FCC PART 18-A SOUND RATING "A" BALLAST TYPE **INSTANT START** ANSI C82.11 - 1993 VOLTAGE TRANSIENTS INPUT/PROTECTION FUSE OUTPUT/PROTECTION MIN. OPERATING TEMP - 30 °C ('- 20 °F) 70 ⁰C (158 ⁰F) MAX. CASE TEMP APPROVALS/CLASS UL LISTED, CLASS " P ", 1 OUTDOOR

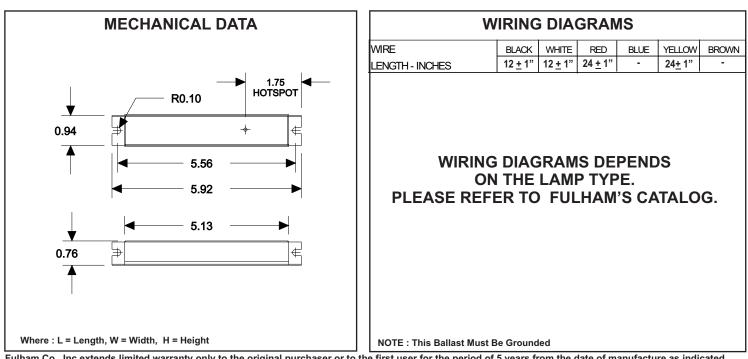

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>. DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED. Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com 2006-29SP-1 rev I



SPECIFICATION SHEET : WH1-120-L


This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Potted Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight.

This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

INPUT VOLT: 120V ± 10%, 50/60Hz LAMP WATTS/TYPE LAMPS OPERATED INPUT WATTS LINE CURRENT **BALLAST FACTOR** EFFICACY FACTOR F42T6 28 0.24 0.9 3.2 1 F13T2 1 17 0.15 1.0 6.0 F13T2 2 27 0.24 0.9 3.3 F6T2 1 8 0.08 1.1 13.1 F8T2 12 0.10 1.2 10.6 1 F11T2 1 14 0.13 1.1 8.0 POWER FACTOR > 0.9 < 34.6 % THD EMI/RFI COMPLIANCE FCC PART 18-A SOUND RATING " A " BALLAST TYPE **INSTANT START** VOLTAGE TRANSIENTS ANSI C82.11 - 1993 INPUT/PROTECTION FUSE OUTPUT/PROTECTION - 30 ⁰C ('- 20 ⁰F) MIN. OPERATING TEMP 70 °C (158 °F) MAX. CASE TEMP ENERGY STAR 4.0 APPROVALS/CLASS UL LISTED, CLASS " P ", 1 OUTDOOR

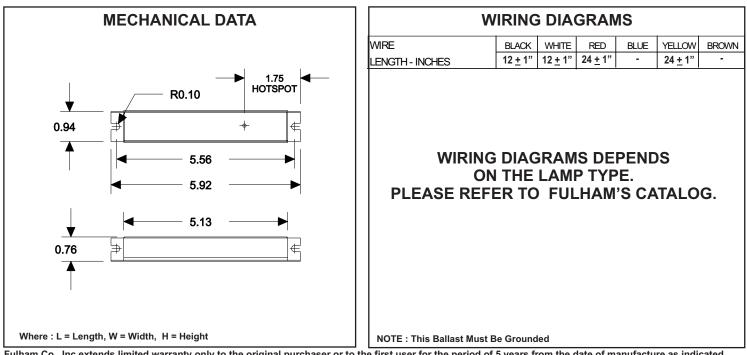

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>. DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED. Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com 2006-29SP-2 rev I

ELECTRICAL DATA